


SPS USB CHARGER

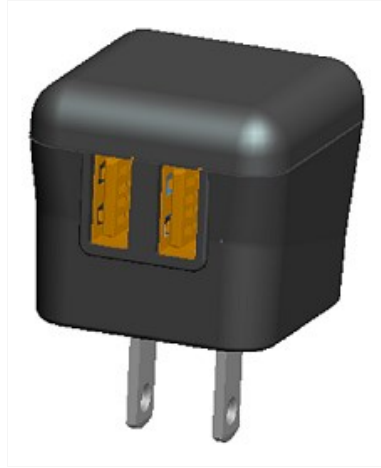

[Mechanical SPEC>](#)

INPUT

Input voltage : 90 ~ 264Vac
Frequency : 50/60Hz±3Hz

SAFETY STANDARDS

UL 60950-1
EN/IEC 60950-1
GB 4943
BS EN 60950-1
AS/NZS 60950-1
K 60950-1

EMI EMISSION

15.5W KSA01A5210100D5

EXTERNAL POWER SUPPLIES

KEY FEATURES

Two USB connectors, charge two device at the same time
Light and portable
High power density
High compatibility

KEY APPLICATIONS

- Mobile phone
- Tablet PC
- Audio & Video product
- Netcom Product
- Set top box

OUTPUT

Output voltage/current:

USB1: 5V/2.1A

USB2: 5V/1A

Output power: 15.5W max

Over voltage protection: The adapter shall resume normal operation when the fault condition is removed.

Over current protection: It will automatically recover at 110-200% of rated load

Short circuit protection: The adapter shall resume normal operation when the fault condition is removed.

Operating temperature: 0~40°C

Non-Operating temperature: -20°C~ +80°C

CERTIFICATES AND APPROVALS

CB CE GS T-Mark
UL-CUL FCC
UK
SAA
CCC
KC MEPS

EMS IMMUNITY

Radiation & Conduction Test:FCC part 15,
EN 55022, GB9254, GB17625.1.
Harmonic Test: EN 61000-3-2
Flicker Test: EN 61000-3-3

ESD Test: EN 61000-4-2
RS Test: EN 61000-4-3
EFT Test: EN 61000-4-4
Surge Test: EN 61000-4-5
CS Test: EN 61000-4-6
DIP Test: EN 61000-4-11

CERTIFICATES AND APPROVALS



[/// Contact Us](#)
[/// Sitemap](#)