


GLASS BODY

24 AWG (0.020" ± 0.002" DIAMETER),
TINNED CCS, 1.00" LONG MINIMUM

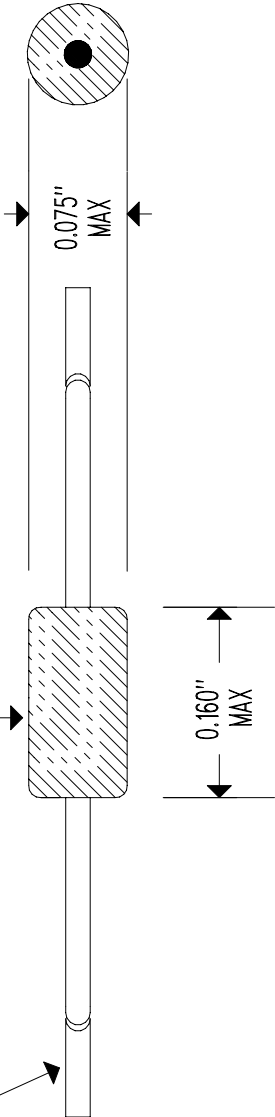

RESISTANCE @ +25°C = 12,000 Ω ± 10%
RESISTANCE/TEMPERATURE CURVE = "G"
BETA "β" (0 TO +50°C) = 3,575°K NOMINAL
TEMPERATURE COEFFICIENT @ +25°C = -4.03%/°C NOMINAL
DISSIPATION CONSTANT = 2 mW/°C NOMINAL (STILL AIR)
THERMAL TIME CONSTANT = 5 SECONDS NOMINAL (STILL AIR)
THERMAL TIME CONSTANT = 0.5 SECONDS NOMINAL (WELL STIRRED OIL)
MAXIMUM TEMPERATURE RATING = +300°C

NONE	RELEASE TO PRODUCTION		01/28/14	DD	
REV		REVISION RECORD	DATE	APP	
SCALE	NONE	© COPYRIGHT			
DRAWN BY DAN DANKERT		U.S. SENSOR CORP.			
DATE 01/28/14		714-639-1000 www.ussensor.com			
REV. NONE		NTC THERMISTOR			
LAYER 0 OF 1		P/N 123GG1K			