

Product information MAB 4100 grau/grey

Industrial Connecting Solutions: Circular Connectors: Audio/Video Connectors: DIN EN 60 130-09 Connectors (MAS/MAK series): with locking screw: Panel-mouted sockets: MAB 4100 grau/grey https://catalog.beldensolutions.com: 443/link/57078-24228-256281-256282-24384-24391-24392-34646/en/conf/uistate and the state of theMAB 4100 grau/grey Name panel-mounted socket with locking screw; solder joint; not shielded **Delivery informations** Availability available **Product description** MAB 4100 grau/grey Type Order No. 930 951-517 Type of contact Colour Description panel-mounted socket with locking screw; solder joint; not shielded Number of contacts Conductor size $<= 0.34 \text{ mm}^2$ Technical data LF output "Phone" EN 60 130-09 Rated current 4 A Rated voltage AC/DC 34 V Type of termination solder Material Contact material (socket) brass Contact surface material tin plated Contact bearer material PA 66/UL standard 94V-2 Housing material **Environmental conditions** Protection class (IEC 60529) IP 30

-20 °C to +60 °C




Temperature range



Industrial Connecting Solutions: Circular Connectors: Audio/Video Connectors: DIN EN 60 130-09 Connectors (MAS/MAK series): with locking screw: Panel-mouted sockets: MAB 4100 grau/grey https://catalog.beldensolutions.com:443/link/57078-24228-256281-256282-24384-24391-24392-34646/en/conf/uistate

Picture

Drawing

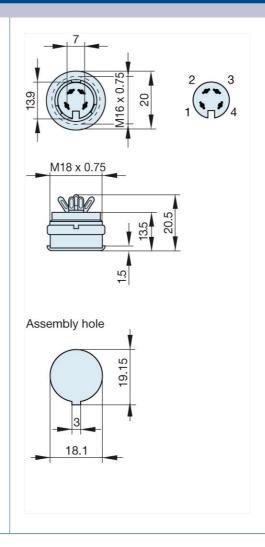

Belden Deutschland GmbH

lm Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect.





The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

