




1500 HN series

Single Output DC/DC Converter

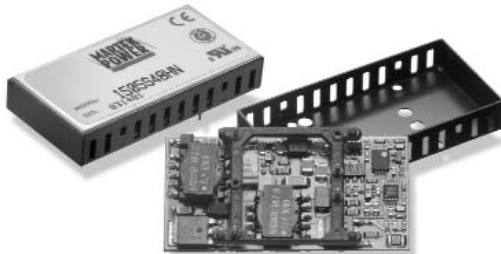

DESCRIPTIONS

The 1500HN, single output power modules are 12 to 15 watt DC/DC converters available in a single output configuration providing 3.3 VDC to 15 VDC outputs in a compact, industry standard 1.0" X 2.0" X 0.375" package. These 400kHz, switching converters are available in 12, 24 and 48 VDC inputs making them one of the most versatile product lines in the market with efficiencies up to 89%. Advanced surface mount construction allows these converters to achieve outstanding thermal performance eliminating the need for thermal potting compounds and thereby enhancing manufacturing efficiency to reduce costs.

OUTPUT CHARACTERISTICS

	Min	Typ	Max	Unit/Comments
Output Voltage Set Point		±1		% Output voltage at nominal line & FL
Total Band Error	-2		+2	% Output voltage including line/load regulation setting
Line Regulation		±0.5		% Output voltage measured from min. input line to maximum
Load Regulation		±0.5		% Output voltage measured from FL to 10% load
Temperature Coefficient		±0.01		% per degree C
Ripple/Noise		60	100	mV p-p measured at 20 MHz bandwidth with external 1 µf capacitor
Output Voltage and Current				Refer to model selection chart
Load Transient Response		±2		% deviation of Vout voltage for a 25% load change for 200µS
Short Circuit Protection				Indefinite, Automatic Recovery
Overvoltage Protection		125		%; Clamp type (5VDC output set at 6.8VDC)

FEATURES

- Up to 89% Efficiency
- Single Output, 15 watt converter
- Available in 12, 24 and 48 VDC Inputs
- Industry Standard 1.0" X 2.0" X 0.375" Package
- Remote On/Off, Input Over Voltage and Short Circuit Protection

INPUT CHARACTERISTICS

	Min	Typ	Max	Units/Comments
Input Voltage				
12 VDC Input Models	9	12	18	VDC
24 VDC Input Models	18	24	36	VDC
48 VDC Input Models	36	48	75	VDC
Under Voltage Shut Down				
12 VDC Input Models	7.8			VDC
24 VDC Input Models	15.0			VDC
48 VDC Input Models	28.1			VDC
Minimum Input Current				
12 VDC Input Models	0			mA
24 VDC Input Models	0			mA
48 VDC Input Models	0			mA
Full Load Input Current				
12 VDC Input Models			1.63	A
24 VDC Input Models			0.78	A
48 VDC Input Models			0.39	A
Input Fuse Requirements				
12 VDC Input Models			3	Amps; Slow blow type
24 VDC Input Models			2	Amps; Slow blow type
48 VDC Input Models			1	Amps; Slow blow type
Efficiency by Model				
1503S12HN		78		%; FL Nominal Line
1505S12HN		82		%; FL Nominal Line
1512S12HN		86		%; FL Nominal Line
1515S12HN		86		%; FL Nominal Line
1503S24HN		80		%; FL Nominal Line
1505S24HN		84		%; FL Nominal Line
1512S24HN		86		%; FL Nominal Line
1515S24HN		87		%; FL Nominal Line
1503S48HN		80		%; FL Nominal Line
1505S48HN		84		%; FL Nominal Line
1512S48HN		86		%; FL Nominal Line
1515S48HN		89		%; FL Nominal Line
Switching Frequency	360	400	440	kHz; Factory set
Remote Shut Down	Off	0	0.80	VDC; Referenced to input
	On	3.5		VDC or open; Referenced to input
Input - Output Capacitance		1200		pF
Input Filter				LC type
Isolation Voltage				
12 VDC & 24 VDC Input Models				
Input to Output		750		VDC
Input to Baseplate		750		VDC
Output to Baseplate		750		VDC
48 VDC Input Models				
Input to Output		1100		VDC
Input to Baseplate		1100		VDC
Output to Baseplate		750		VDC
Isolation Resistance		100		MOHms

GENERAL CHARACTERISTICS

	Min	Typ	Max	Unit/Comments
Operating Temp. Range	-40		+105	°C; measured at baseplate
Storage Temp. Range	-55		+125	°C; measured at baseplate
Material Flammability				UL94V-0
Altitude: Operating			10,000	Feet
Non-Operating			40,000	Feet
Relative Humidity	5		95	% Humidity, non-condensing
Weight			16	Grams
Size				1.0" X 2.0" X 0.375"
Case Material				Black coated aluminum
Agency Approvals				UL/CUL1950

Notes:

1. Unless otherwise specified dimensions are in inches (mm).

Tolerances	Inches	mm
	X.XX = ± 0.02	X.X = ± 0.5
	X.XXX = ± 0.010	X.XX = ± 0.25

2. Controlling dimension in inches.
3. Case is vented on 2" long sides only.
* Optional - present on -R Models only.

>> B-121



How To ORDER

HOW TO ORDER

15 XX S XX HN - Y


Wattage ————
Output Voltage ————
Single Output ————

ROHS Compliant
Hi-Density, Non-Encap
Input Voltage

R Options: To add the remote on/off feature to the converter please add a "-R" at the end of the part number. An additional pin (pin#6) will be added to the converter. Consult mechanical drawing for location.

DERATING CURVES

MODEL 1500HN Single 3.3V & 5V

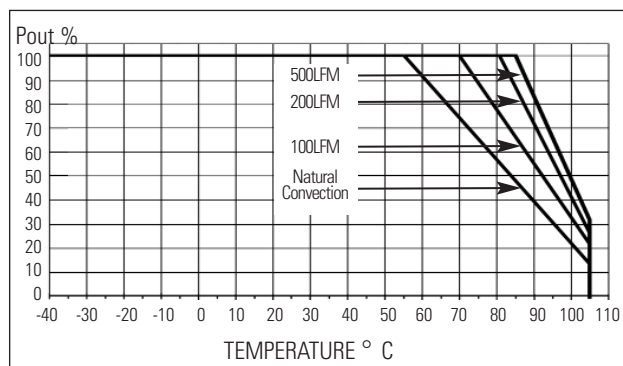

MODEL 1500HN Single 12 & 15V

