
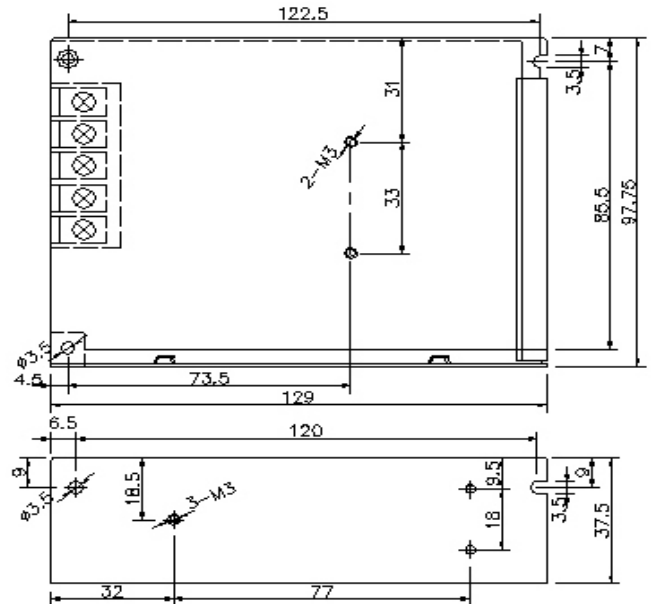


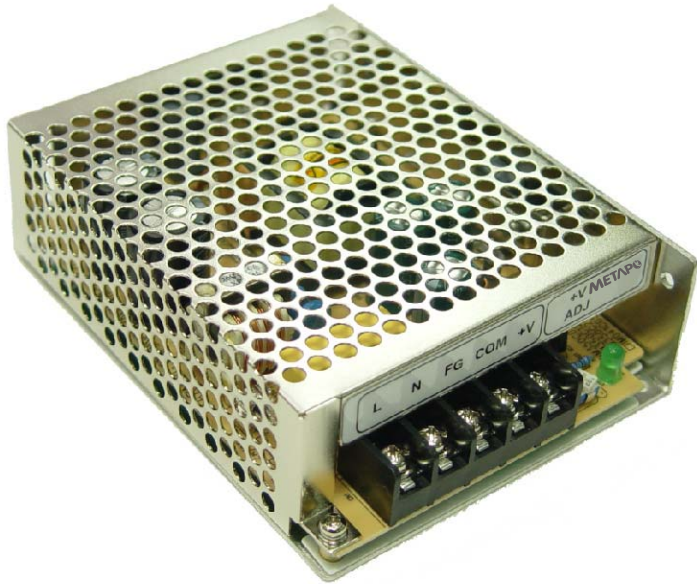

SPECIAL FEATURES

- Universal AC input / full range
- High efficiency
- DC adjust range
- LED Power indicated
- Output reverses protection
- Free air cooling convection
- 129* 98* 38 mm
- Weight 0.33 kgs/pcs
- 1 year warranty

SPECIFICATION

Output

Maximum power.....40 Watts
 DC adjust range..... $\pm 10\%$ of rating output voltage
 Hold-up time.....> 60 ms at 230Vac/ 50Hz
 Rise time.....< 40ms
 Over Voltage Protection...115% ~ 135% of rated output
 Over Power Protection.....105% ~ 150%, auto-recovery
 Short Circuit Protection.....Hiccup mode
 Connector.....5P / 9.5mm pitch terminal block

Input

Input range.....90-264Vac
 Frequency.....47-63Hz
 AC inrush current...Cold start, 30A @ 115Vac; 60A @ 230Vac
 EMI/RFI.....FCC Part 15J, Class A & CISPR 22 Class A

Operating temperature

0 °C to +45 °C @100%; -10 °C @ 80%; 60 °C @ 60% load
 Storage temperature: -20 °C to +80 °C
 Free air cooling convection

Model	IM041C05-1M	IM041C12-1M	IM041C24-1M
Output	V1	V1	V1
Voltage	+5V	+12V	+24V
Max. Load	8A	3.5A	1.8A
Efficiency	>70% @ 115 Vac/60 Hz	>75% @ 115 Vac/60 Hz	>75% @ 115 Vac/60 Hz