
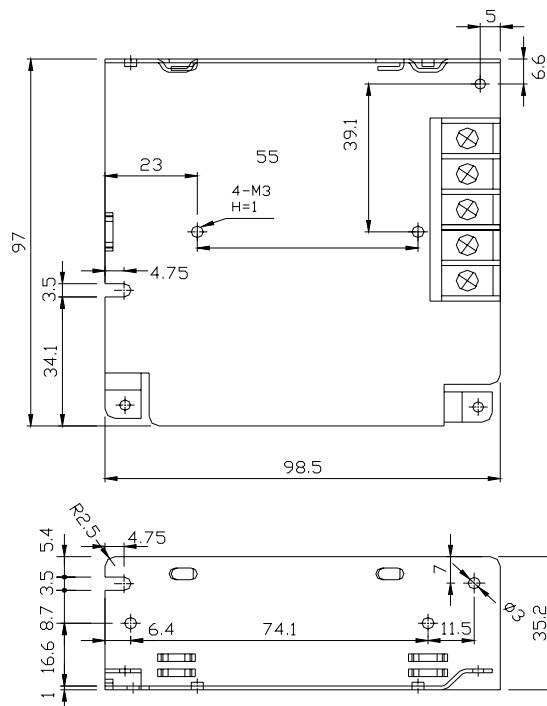


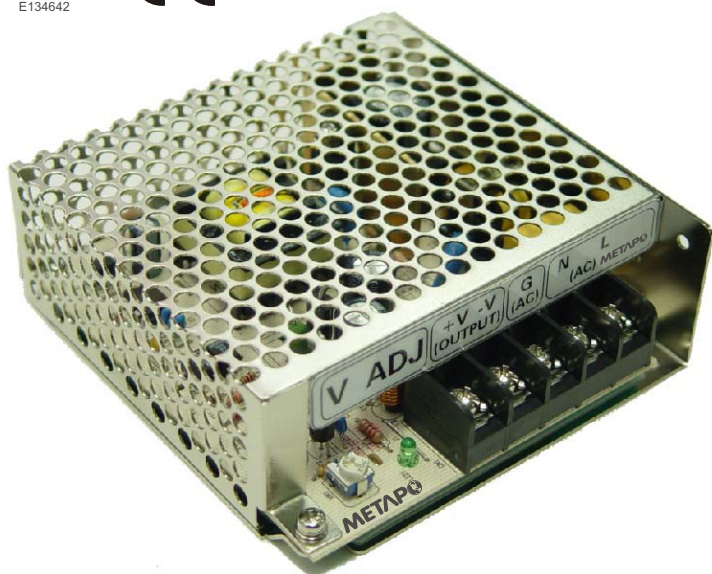

SPECIAL FEATURES

- Universal AC input / full range
- High efficiency
- DC adjust range
- LED Power indicated
- Output reverses protection
- Free air cooling convection
- 99* 97* 35 mm
- Weight 0.30 kgs/pcs
- 1 year warranty

SPECIFICATION

Output

Maximum power.....15 Watts
 DC adjust range..... $\pm 5\%$ of rating output voltage
 Hold-up time.....> 16 ms at 115Vac/ 60Hz
 Rise time.....< 20ms
 Over Voltage Protection...115% ~ 150% of rated output
 Over Power Protection.....110% ~ 200%, auto-recovery
 Short Circuit Protection.....Hiccup mode
 Connector.....5P / 9.5mm pitch terminal block

Input

Input range.....90-264Vac
 Frequency.....47-63Hz
 AC inrush current...Cold start, 20A @ 115Vac
 EMI/RFI.....FCC Part 15J, Class A & CISPR 22 Class A

Operating temperature

0 °C - 40 °C @100%
 Storage temperature: -20 °C to +80 °C
 Free air cooling convection

Model	IM150C05-1M	IM150C12-1M	IM150C24-1M
Output	V1	V1	V1
Voltage	+5V	+12V	+24V
Max. Load	3A	1.25A	0.7A
Efficiency	>71% @ 115 Vac/60 Hz	>72% @ 115 Vac/60 Hz	>75% @ 115 Vac/60 Hz