


MPM-05S Series

Universal Input, 5W High Performance, AC/DC Power Supplies

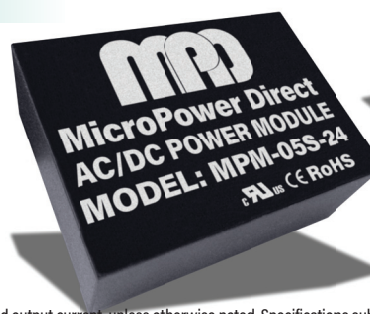

Key Features:

- 5W Output Power
- EN 62368 Approved (UL)
- Universal 85-264 VAC Input
- 4,000 VAC I/O Isolation
- Reinforced Insulation
- -40°C to 85°C Temp
- Meets EN 55032 Class B
- >300 kHour MTBF
- Chassis Mount Available
- DIN Rail Mount Available
- **Low Cost**



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerelectronics.com

W: www.micropowerelectronics.com



Electrical Specifications

Specifications typical @ +25°C, 230 VAC input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range		85		264	VAC
		100		370	VDC
Input Frequency		47		63	Hz
Input Current	See Model Selection Guide				
Inrush Current	115 VAC		10.0		A Pk
	230 VAC		20.0		

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage	See Model Selection Guide				
Output Current	See Model Selection Guide				
Minimum Load	See Note 1	0			%
Output Voltage Accuracy			±2.0		%
Line Regulation	See Note 2		±0.5		%
Load Regulation	I _{OUT} = 0% to 100%		±1.0		%
Ripple & Noise (20 MHz)	See Note 3		50	100	mV Pk - Pk
Hold-Up Time	115 VAC	12	15		mSec
	230 VAC	70	80		
Temperature Coefficient			±0.02		%/°C
Overload Protection	Autorecovery	150		300	%I _{OUT}
Short Circuit Protection, See Note 4	Continuous (Autorecovery)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage, See Note 5	Input to Output	4,000			VAC
	Input to PE	2,000			
Switching Frequency			100		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-40		+105	°C
Lead Temperature, See Note 6	Wave Solder			260	°C
	Hand Solder			360	
Cooling	Free Air Convection (See Derating Curve)				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	See Mechanical Diagrams (Page 5, 6)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	See Mechanical Diagrams (Page 5, 6)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	300			kHours
Safety Standards	UL/cUL 62368-1 recognition (UL certificate)				
Safety Class	Class I				

www.micropowerelectronics.com

Model Number	Input		Output			Over Voltage Protection (VDC)	Capacitive Load (μF, Max)	Efficiency (230 VAC, %, Typ)	Fuse Rating Slow-Blow
	Current (A)		Voltage (VDC)	Current (A Max)	Power (W)				
	115 VAC	230 VAC							
MPM-05S-03	0.125	0.08	3.3	1.250	4.0	7.50	8,100	70	1.0A/250V
MPM-05S-05	0.125	0.08	5.0	1.000	5.0	7.50	6,800	75	1.0A/250V
MPM-05S-09	0.125	0.08	9.0	0.550	5.0	15.0	1,200	77	1.0A/250V
MPM-05S-12	0.125	0.08	12.0	0.420	5.0	20.0	1,000	79	1.0A/250V
MPM-05S-15	0.125	0.08	15.0	0.330	5.0	20.0	680	80	1.0A/250V
MPM-05S-24	0.125	0.08	24.0	0.230	5.5	30.0	270	82	1.0A/250V


Notes:

- Operation at no load will not damage the units, however, they may not meet all specifications.
- Line regulation is measured with the unit at full load while the input is varied from 85 VAC to 264 VAC.
- When measuring output ripple, it is recommended that an external 0.1 μ F high frequency ceramic capacitor be placed in parallel with a 47 μ F high frequency electrolytic capacitor from the +VOUT pin to the -VOUT pin.
- Output short circuit protection is provided by a "hiccup mode" circuit. The unit recovers automatically when the fault condition is removed.
- Input-output isolation is tested for 60 sec with a leakage current of <5 mA.
- Lead temperature for wave soldering is specified for 5 to 10 seconds with a tolerance of $\pm 5^{\circ}\text{C}$. For manual soldering it is specified for 3 to 5 seconds with a tolerance of $\pm 10^{\circ}\text{C}$.
- It is recommended that a fuse be used on the input of a power supply for protection. For the MPM-05S series, a 1.0A/250 VAC slow blow should be used.


For the A2S adapter board option, add the suffix "-A2S" to the model number (i.e. MPM-05S-15-A2S) See Page 5

For the A4S adapter board option, add the suffix "-A4S" to the model number (i.e. MPM-05S-24-A4S) See Page 6


Temperature Derating

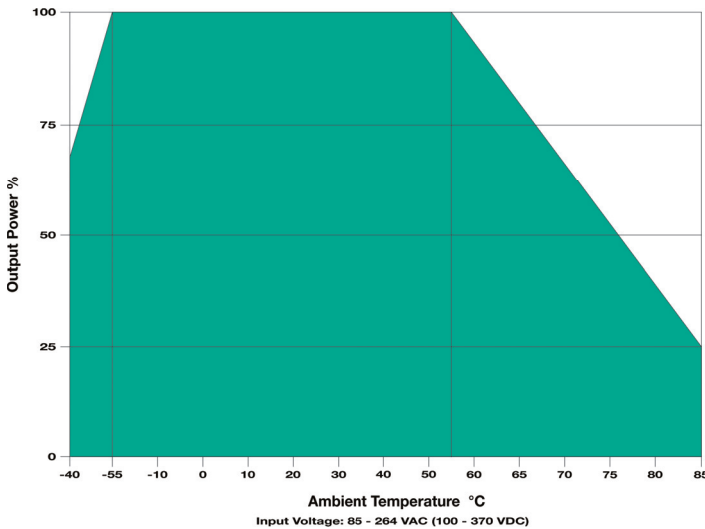


Input Voltage Derating: -25°C to +70°C

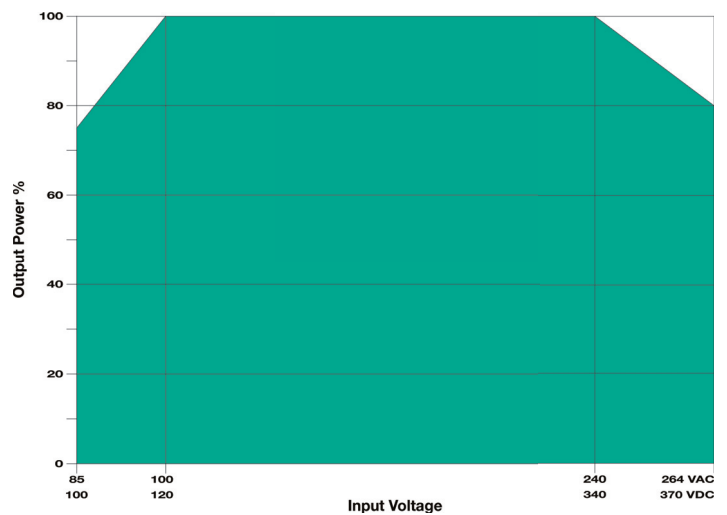


Efficiency vs Input Voltage: 5 VOUT Models

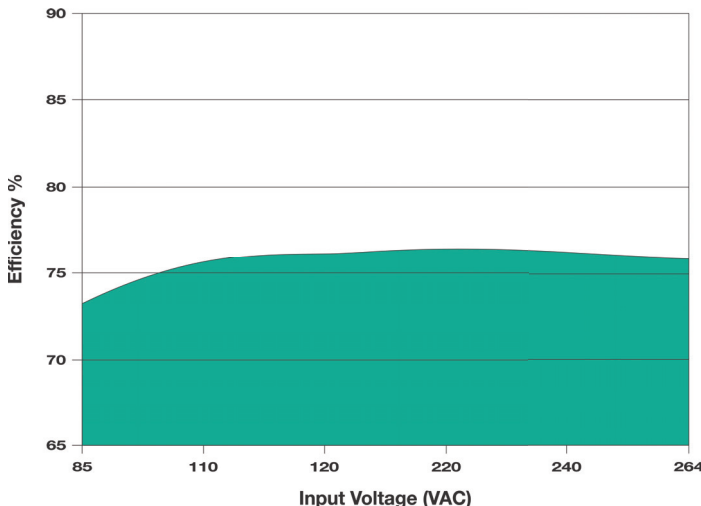


Efficiency vs Output Load: 5 VOUT Models

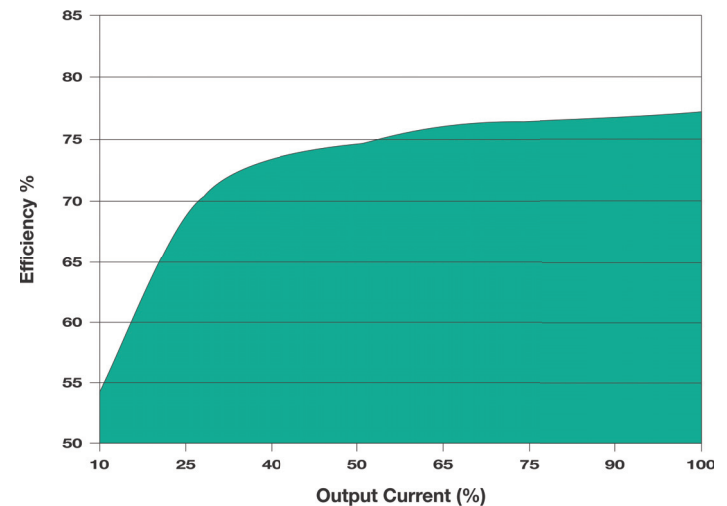


Efficiency vs Input Voltage: 12 VOUT Models

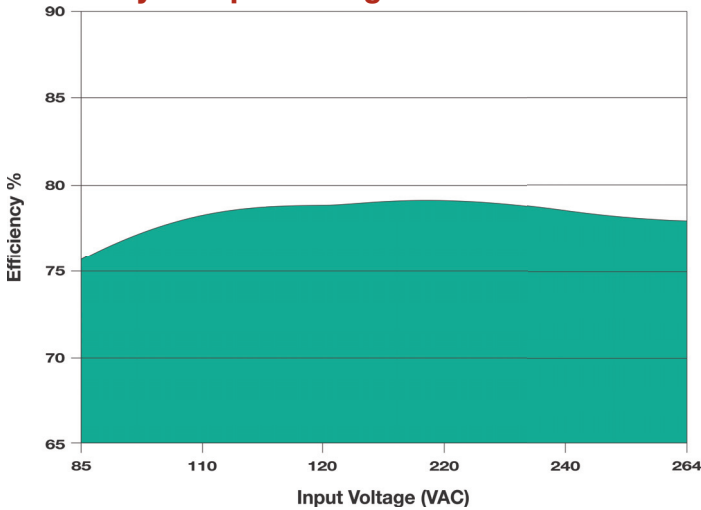


Efficiency vs Output Load: 12 VOUT Models

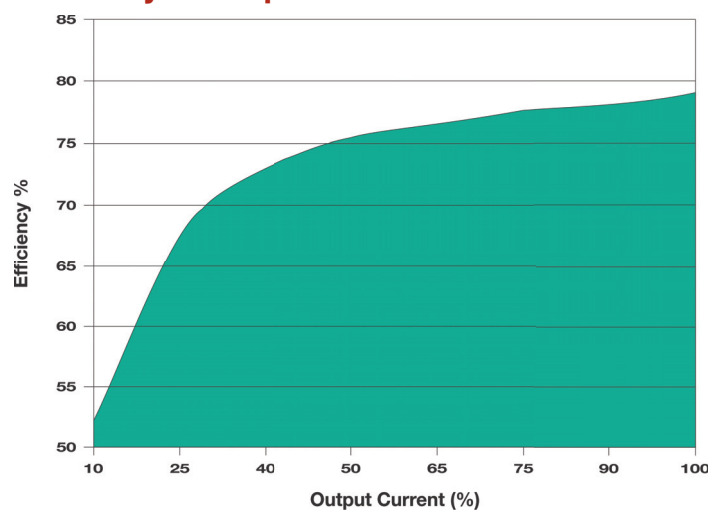


Efficiency vs Input Voltage: 24 VOUT Models

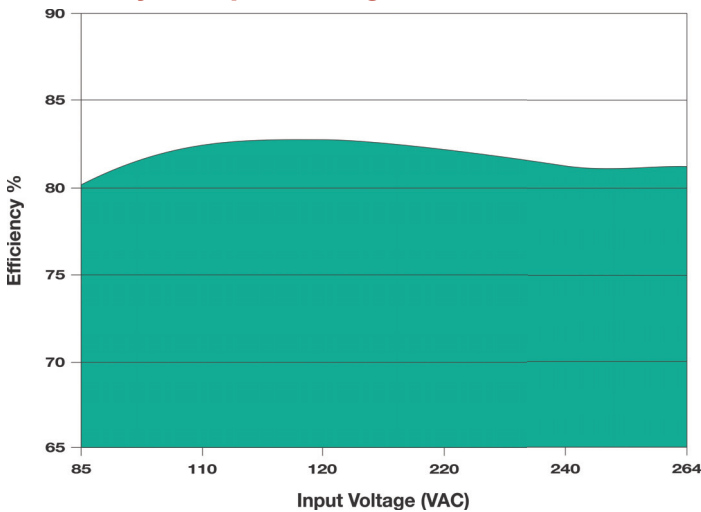

Efficiency vs Output Load: 24 VOUT Models

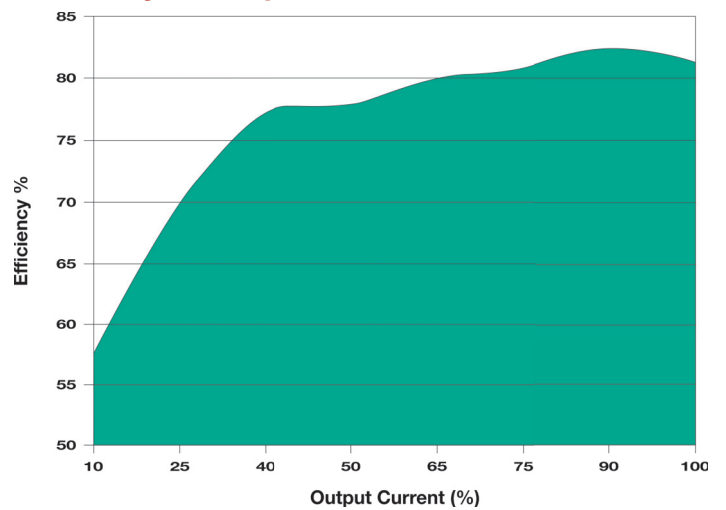

Simple Connection

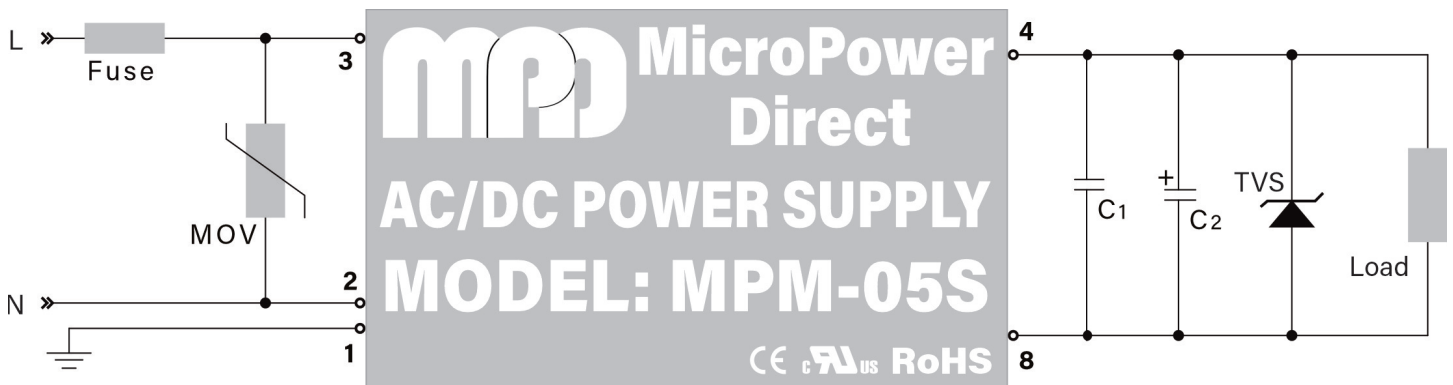

The diagram above illustrates a typical application connection of the MPM-05S series. Notes on this circuit (starting with the input circuit) are:


1. It is recommended that an external fuse be used. The suggested fuse is a 1.0A/250 VAC slow blow.
2. All units are rated for EN 55032 (CE/RE) class B without external components.
3. The MOV connected across the input protects the unit from possible line surges.
4. If output noise levels lower than the specified limits are required, the addition of C₁ and C₂ should be sufficient for most applications. The recommended values are shown in the table at right. The output filtering capacitor C₂ is a high frequency, low resistance electrolytic capacitor. Capacitor C₁ is ceramic. Voltage derating of capacitors should be 80% or above.
5. The TVS is added to protect circuits being powered from damage if the module fails.

Model	MOV	C1	C2	TVS
MPM-05S-03	S14K300	1.0 μ F/50V	330 μ F/16V	SMBJ7.0A
MPM-05S-05			330 μ F/16V	SMBJ7.0A
MPM-05S-09			120 μ F/25V	SMBJ12A
MPM-05S-12			120 μ F/25V	SMBJ20A
MPM-05S-15			68 μ F/25V	SMBJ20A
MPM-05S-24			68 μ F/35V	SMBJ30A

Parameter	Conditions	Criteria	Level
Radiated Emissions	EN 55032		Class B
Conducted Emissions	EN 55032		Class B
ESD	EN 61000-4-2	B	±8 kV Air ±6 kV Contact
RS	EN 61000-4-3	A	10V/m
EFT, See Note 1 At Right	EN 61000-4-4	B	±2 kV ±4 kV
Surge, See Note 2 At Right	EN 61000-4-5	B	±1 kV Line to Line ±2 kV Line to Grnd
Surge, See Note 3 At Right	EN 61000-4-5	B	±2 kV Line to Line ±4 kV Line to Grnd
CS	EN 61000-4-6	A	10V rms
Voltage Dips, Short, Interruptions	EN 61000-4-11	B	0% - 70%

Notes:

1. To meet the requirements of EN 61000-4-4 (±2 kV), use the "Simple Connection" as shown on page 3. To meet EN 61000-4-4 (±4 kV) use the "Typical Connection" as shown below. Contact the factory for more information.
2. To meet the requirements of EN 61000-4-5 (±1 kV line to line, ±2 kV line to Grnd), use the "Simple Connection" as shown on page 3. Contact the factory for more information.
3. To meet the requirements of EN 61000-4-5 (±2 kV line to line, ±4 kV line to Grnd), use the "Typical Connection" as shown below. Contact the factory for more information.

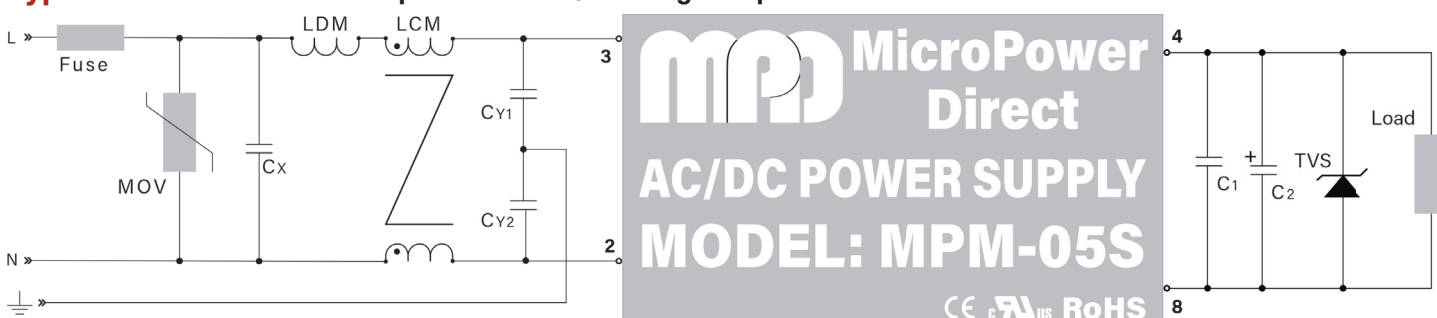Typical Connection: With Input Protection/Filtering Components

The diagram above illustrates a typical connection of the **MPM-05S** series. The input components are required to meet the more stringent EFT/Surge levels of EN 61000-4 (see notes for EMC Characteristics table above). Some notes on these components are:

1. It's recommended that an external fuse be used. The suggested fuse size is a 1.0A/250 VAC slow blow.
2. All units are rated for EN 61000-4-4 (±2 kV) with the addition of the MOV shown in the connection diagram on page 3. They will meet EN 61000-4-4 (±4 kV) with the additional input components shown in the Typical Connection diagram shown above. All component values are given in the table at right.
3. All units are rated for EN 61000-4-5 (±1 kV LL/ ±2 kV LG) with the addition of the MOV shown in the connection diagram on page 3. They will meet EN 61000-4-5 (±2 kV LL/±4 kV LG) with the additional input components shown in the Typical Connection diagram shown above. All component values are given in the table at right.

4. The output filtering capacitors (C1 & C2) and TVS are discussed in the notes for the simple connection diagram on page 3. Recommended values are given in the table with that diagram.
5. Suggested component values are:

Component	MPM-05S-03	MPM-05S-05	MPM-05S-09	MPM-05S-12	MPM-05S-15	MPM-05S-24
Fuse				1.0A/250 VAC		
MOV				S14K300		
Cx				0.1 µF/275VAC		
LDM				4.7 µH/2A		
LCM				10 mH		
CY1				1000 pF/400 VAC		
CY2				1000 pF/400 VAC		

6. Input protection and filtering modules are available for a number of MPD AC/DC power supplies. For pricing or full technical information please contact the factory.


Input Filtering Components

Input protection and filtering modules are available for a number of MPD AC/DC and DC/DC power supplies. These include common mode filters, EMC filters, surge & pulse suppressors, and common mode filters.

For use with the **MPM-05S** product series, the **MACFM-02A** filter module is recommended. For pricing or full technical information on the **MACFM-02A** (or any of our other modules) please contact the factory.



Mechanical Dimensions

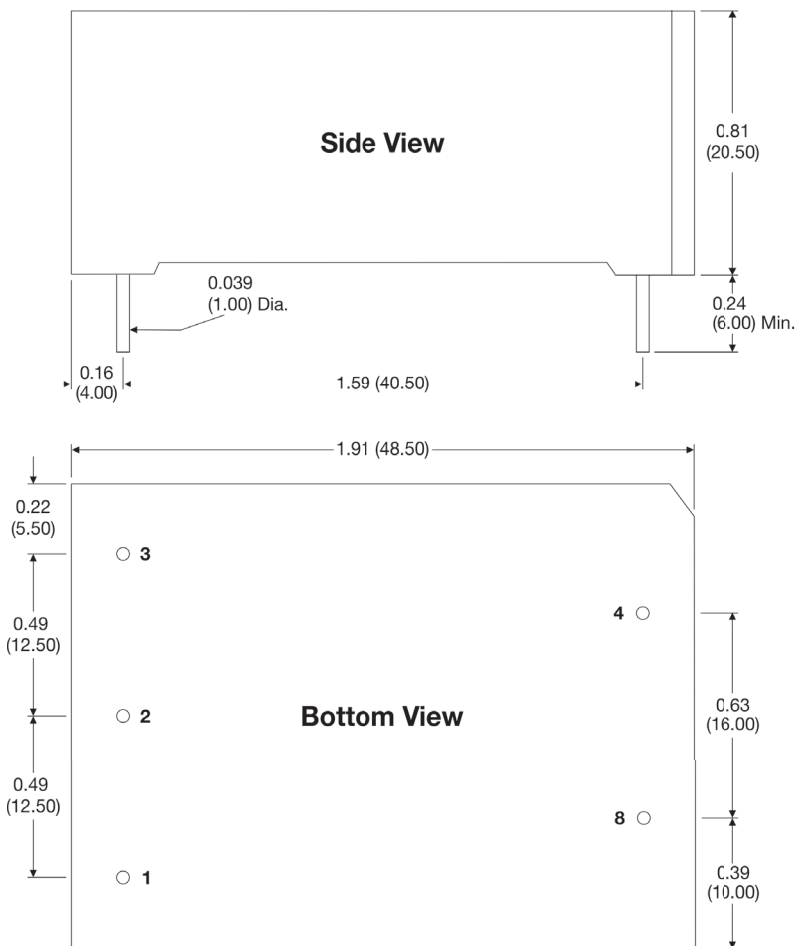


Pin Connections

Pin	Function
1	AC-Ground
2	AC-Neutral
3	AC-Line
4	+V _{OUT}
8	-V _{OUT}

Notes:

- All dimensions are typical in inches (mm)
- General Tolerance = ± 0.02 (± 0.50)
- Pin Tolerance = ± 0.004 (± 0.10)
- Recommended pin hole size (on the application PC Board) is $\varnothing 0.059$ ($\varnothing 1.50$)
- Weight (Typ) = 1.94 Oz (55g)

Mechanical Dimensions: A2S Chassis Mount Adapter

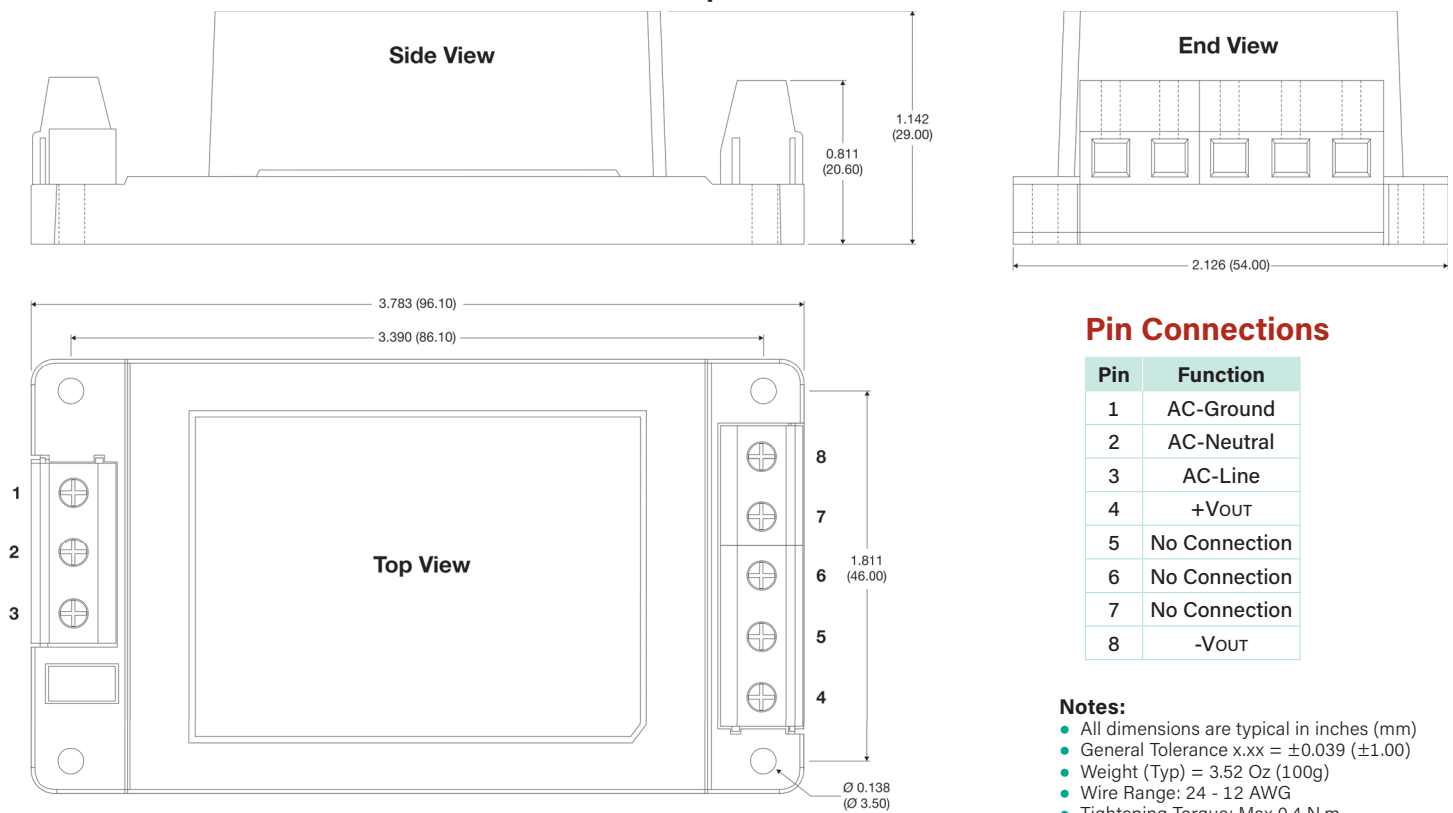

Pin Connections


Pin	Function
1	AC-Ground
2	AC-Neutral
3	AC-Line
4	+V _{OUT}
5	No Connection
6	No Connection
7	No Connection
8	-V _{OUT}

Notes:

- All dimensions are typical in inches (mm)
- General Tolerance x.xx = ± 0.039 (± 1.00)
- Weight (Typ) = 3.52 Oz (100g)
- Wire Range: 24 - 12 AWG
- Tightening Torque: Max 0.4 N-m

Mechanical Dimensions: A4S DIN Rail Mount Adapter

www.micropowerdirect.com

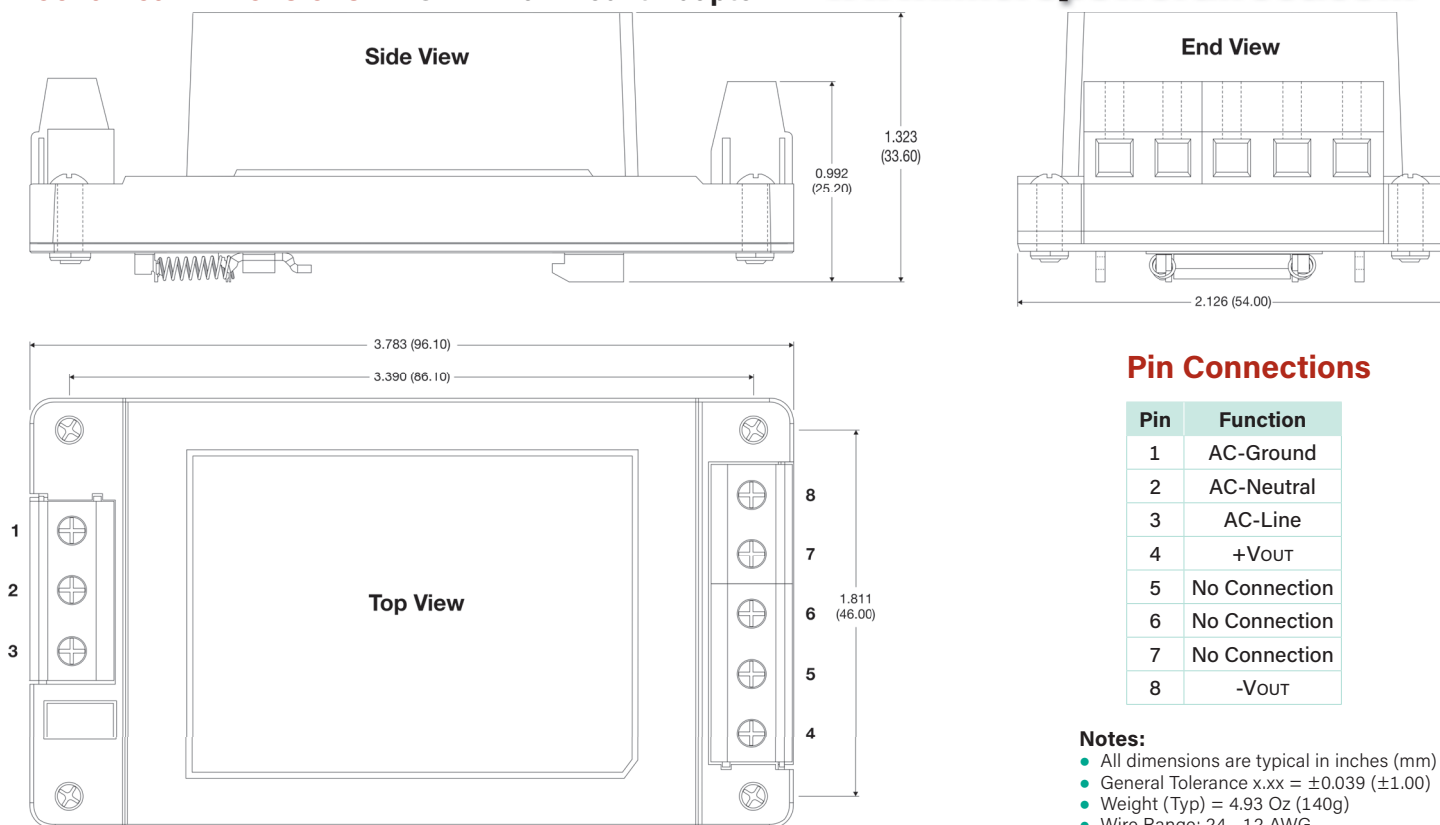

Pin Connections

Pin	Function
1	AC-Ground
2	AC-Neutral
3	AC-Line
4	+VOUT
5	No Connection
6	No Connection
7	No Connection
8	-VOUT

Notes:

- All dimensions are typical in inches (mm)
- General Tolerance x.xx = ± 0.039 (± 1.00)
- Weight (Typ) = 4.93 Oz (140g)
- Wire Range: 24 - 12 AWG
- Tightening Torque: Max 0.4 N·m
- Mounting Rail: TS 35 Rail must be connected to safety ground

MPD offers a very wide range of high performance AC/DC power supplies ranging from 600W UChannel units to 1W units in miniature Single-In-Line (SIP) packages. All are designed and certified to international safety and EMC/EMI standards. We also offer AC/DC supplies approved for use in medical equipment, DIN rail supplies, "Green" energy supplies and constant power supplies.

We also offer a wide variety of DC/DC converters, LED Drivers, POL regulators and IGBT drivers. All products are available with short lead times. Call today for complete information or product samples. Or go to our website:

WWW.MICROPOWERDIRECT.COM



MicroPower Direct
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com