

MPU-60S Series

Single Output, 60W Compact, U-Channel AC/DC Power Supplies



Key Features:

- 60W Output Power
- Universal 90-265 AC Input
- EN 60950 Approved
- Low Leakage Current
- Six Single Output Models
- Meets EN 55022 B
- >130 kHour MTBF
- “Finger Safe” Cover Avail.
- DIN Rail Kit Available



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerdirect.com

W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Universal	90		265	VAC
		120		370	VDC
Input Frequency		47		63	Hz
Input Filter	Meets EN 55022 Class B; FCC Class B				
Input Current	See Model Selection Guide				
Inrush Current	Cold Start, 115 VAC			30.0	A Pk
	Cold Start, 230 VAC			50.0	
Safety Ground Leakage Current				0.5	mA

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage/Current	See Model Selection Guide				
Output Voltage Tolerance			±2.0		%
Line Regulation	Vin = Min to Max		±1.0		%
Load Regulation	Iout = 5% to 100%		±1.0		%
Ripple & Noise (20 MHz)	See Note 1				
Hold-Up Time	115 VAC	10			mSec
Temperature Coefficient			±0.02		%/°C
Over Voltage Protection	See Model Selection Guide				
Overload Protection	See Note 2	125		150	%
Short Circuit Protection	Continuous (Autorecovery)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input to Output	3,000			VAC
		4,242			VDC
	Input to Ground	1,500			VAC
	Output to Ground	500			VAC
Switching Frequency	Fixed		100		kHz

EMI Characteristics

Parameter	Standard	Criteria	Level
Radiated Emissions	EN 55022		B
Conducted Emissions	EN 55022		B
Noise Immunity (EMS)	EN 55024		
Surge	EN 61000-4-4		±1 kV (L-N)
			±2 kV (L-FG & N-FG)

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+70	°C
Storage Temperature Range		-50		+84	°C
Cooling	Free Air Convection (See Derating Curve)				
Humidity	RH, Non-condensing			95	%

Physical

Size	See Mechanical Drawings				
Weight	U-Channel			8.46 Oz (0.240 kg)	
	With Cover			9.17 Oz (0.260 kg)	

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	130			kHours
Safety Standards	UL 1950, EN 60950				
Vibration	10~500 Hz, 5G 10 min/1 Cycle. Period of 60 min each along X, Y & Z Axis				

www.micropowerdirect.com


Model Number	Input		Output			Max Output Power (W)	Over Voltage Protection (VDC)	Efficiency (% Typ)
	Current (A)		Voltage (VDC)	Current (A)				
	115 VAC	230 VAC		Rated	% Min.			
MPU-60S-05T(C)	2.0	1.0	5.0	10.00	1.00	50	6.2	82
MPU-60S-09T(C)	2.0	1.0	9.0	6.66	1.00	60	10.0	84
MPU-60S-12T(C)	2.0	1.0	12.0	5.00	1.00	60	15.0	86
MPU-60S-15T(C)	2.0	1.0	15.0	4.00	1.00	60	18.0	86
MPU-60S-24T(C)	2.0	1.0	24.0	2.50	1.00	60	28.0	86
MPU-60S-48T(C)	2.0	1.0	48.0	1.25	1.00	60	57.0	86

For U-channel and enclosed models, see **MPU-60S** Datasheet


Notes:

1. Output ripple is specified as a maximum of $<0.2\%V_{OUT} + 40\text{ mV (Vp-p)}$. Output noise is specified as a maximum of $<0.5\%V_{OUT} + 40\text{ mV (Vp-p)}$. Ripple and noise is measured at 20 MHz bandwidth using a $0.1\text{ }\mu\text{F}$ and $47\text{ }\mu\text{F}$ capacitor connected in parallel as close to the power supply terminals as possible.
2. Overload protection is provided by a "hiccup mode" circuit. The unit recovers automatically when the fault condition is removed.
3. Over voltage protection is provided by a zener diode clamp.
4. These units will operate at no load without damage, however, they may not meet all specifications. **MPD** recommends that a minimum 1% load always be used.
5. Each unit includes an input fuse. Since this fuse is not field replaceable, it is recommended that an external fuse be used on the input of the power supply for protection. For these units, a 3.15A/250V slow blow fuse is recommended.


Output Load vs Input Voltage: AC Input

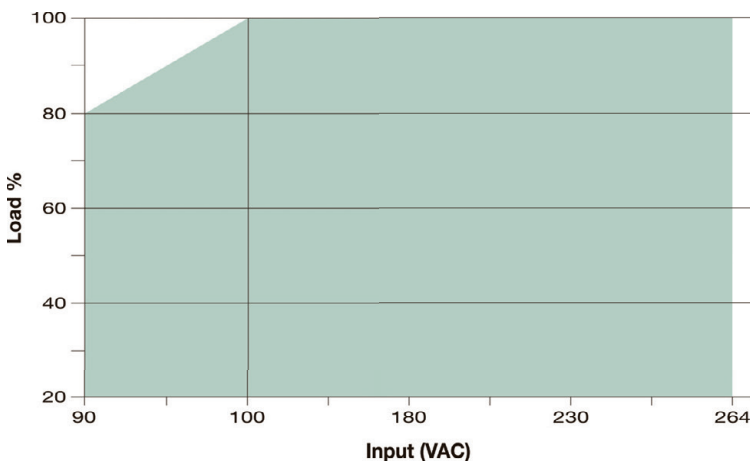

Output Load vs Input Voltage: DC Input

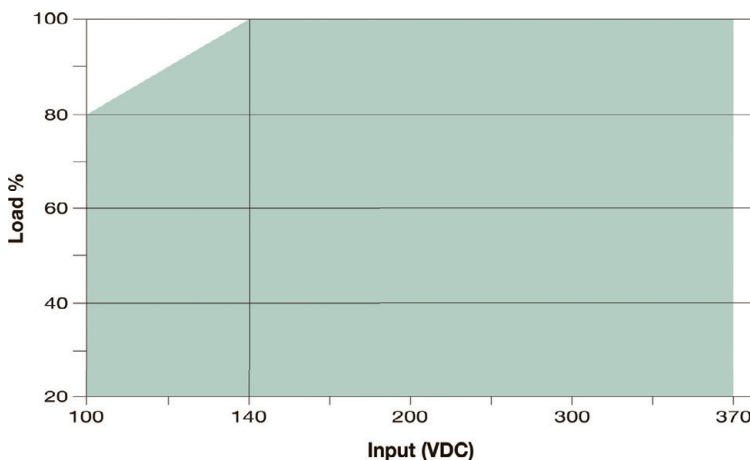


Output LED & Voltage Adjust

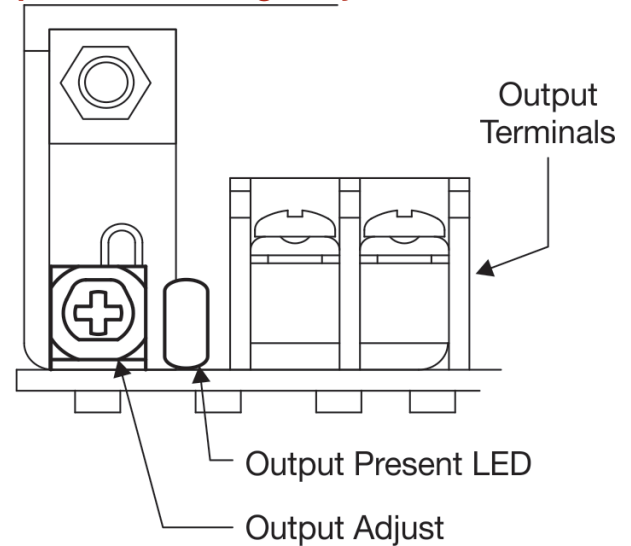

Output LED: An LED lamp next to the output connector. The LED is on (Green) during normal operation. If the LED is not lit, it indicates a problem with the supply.


Output Adjust: The output voltage of the **MPO-60S** can be adjusted by $\pm 10\%$ by using the trim pot located to the side (and just behind) of the output connector. Great care should be taken not to use excessive force when making any adjustment. Too much force may damage the wiper arm of the pot, rendering the power supply inoperable.

Derating Curve, Output Power vs Temperature

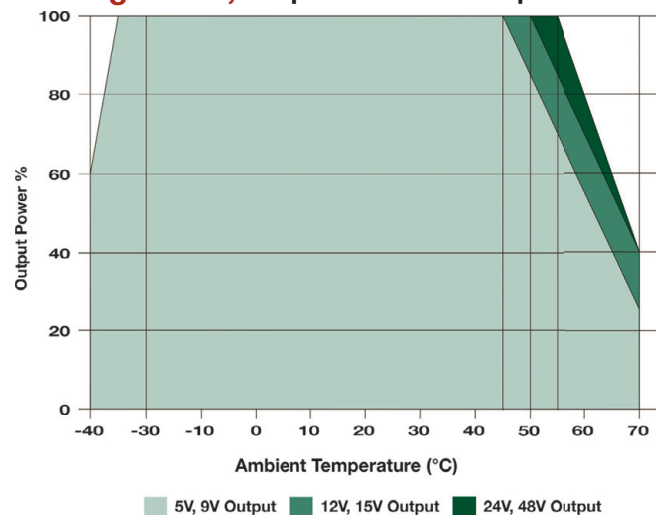


Block Diagram

www.micropowerdirect.com

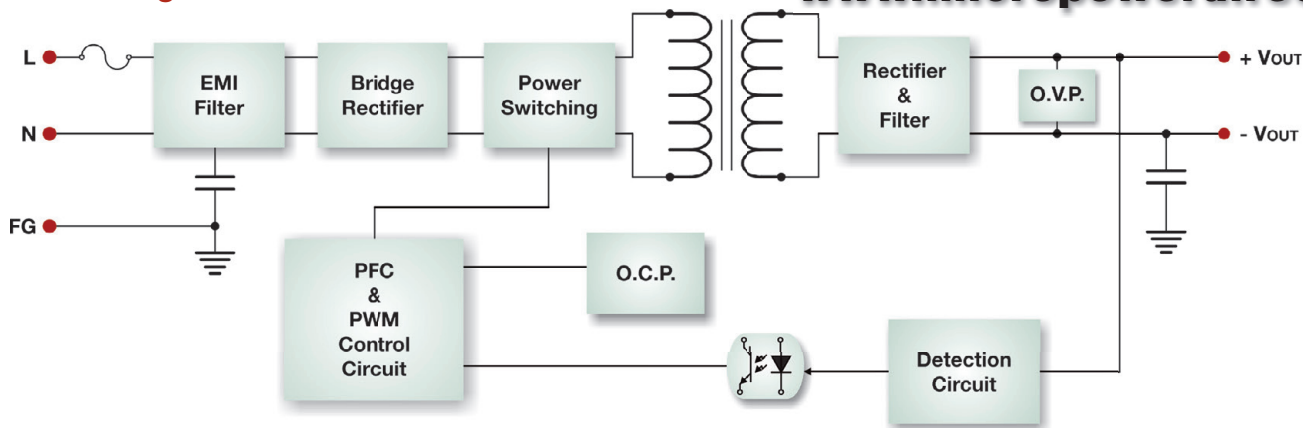

Mechanical Dimensions

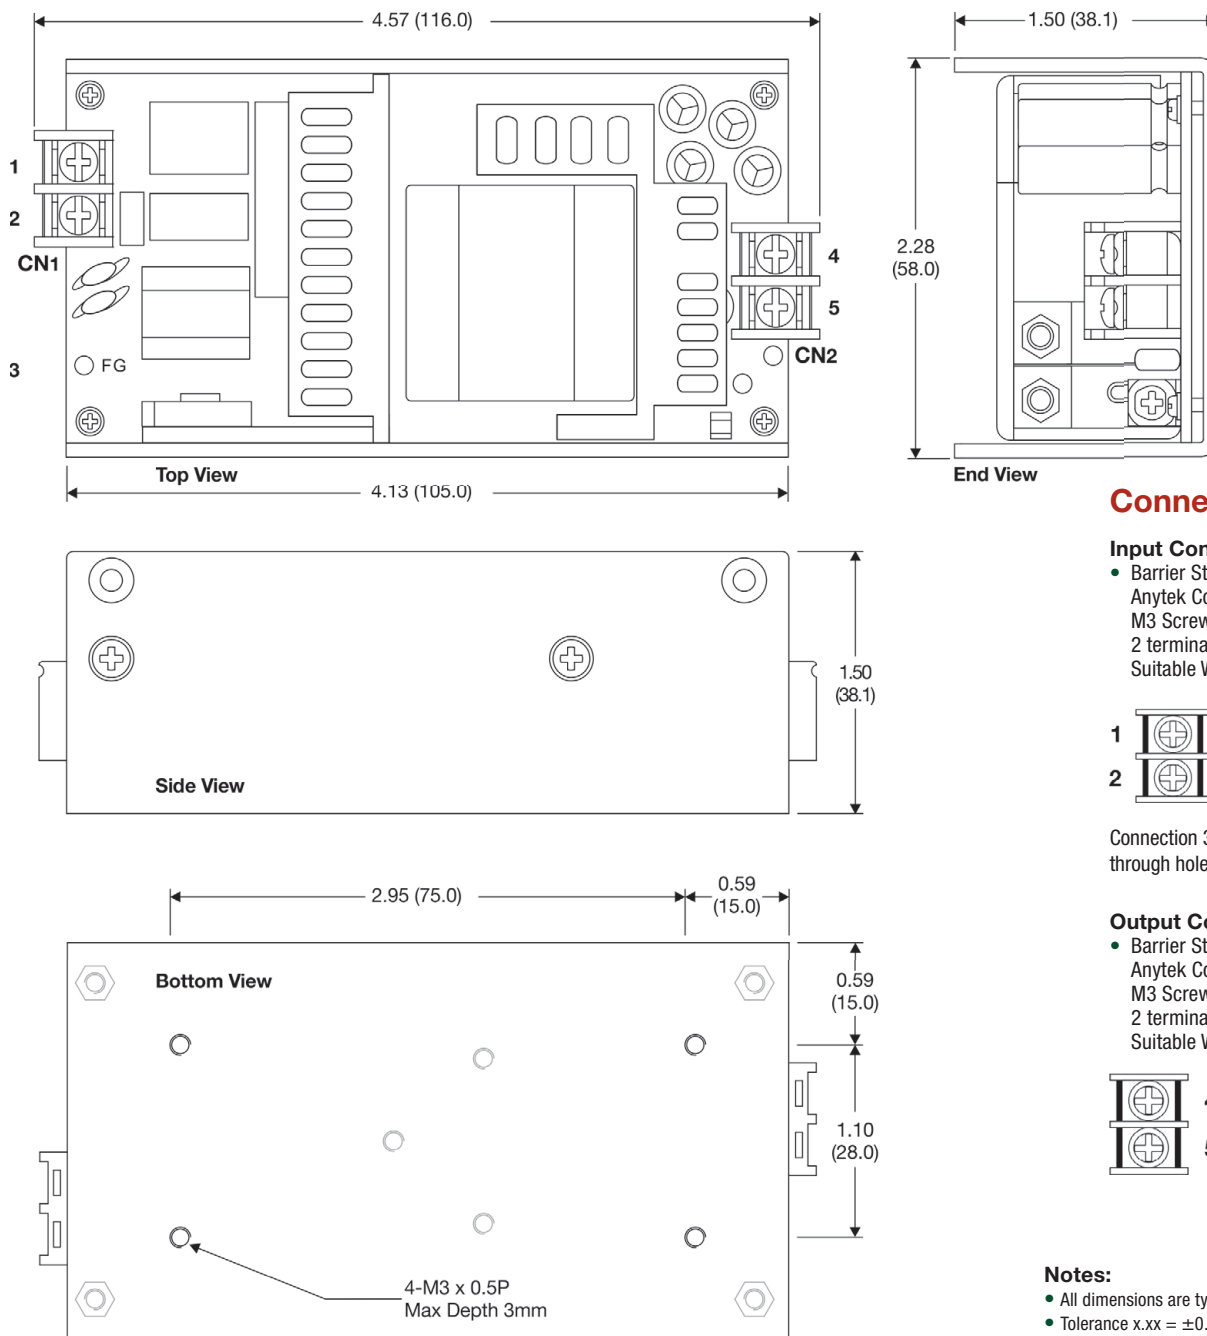

Connections

Input Connector (CN1):

- Barrier Strip Terminal Block:
- Anytek Connector: DG28S-B-02P
- M3 Screws
- 2 terminals, 7.62 mm Centers
- Suitable Wire = 22 - 14 AWG

Pin	Function
1	AC-Neutral
2	AC-Line

Connection 3 (Field Ground) is a plated through hole on the PC Board.

Output Connector (CN2):

- Barrier Strip Terminal Block:
- Anytek Connector: DG28S-B-02P
- M3 Screws
- 2 terminals, 7.62 mm Centers
- Suitable Wire = 22 - 14 AWG





Pin	Function
4	+VOUT
5	-VOUT

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.02 (± 0.50)

Mechanical Dimensions

www.micropowerdirect.com

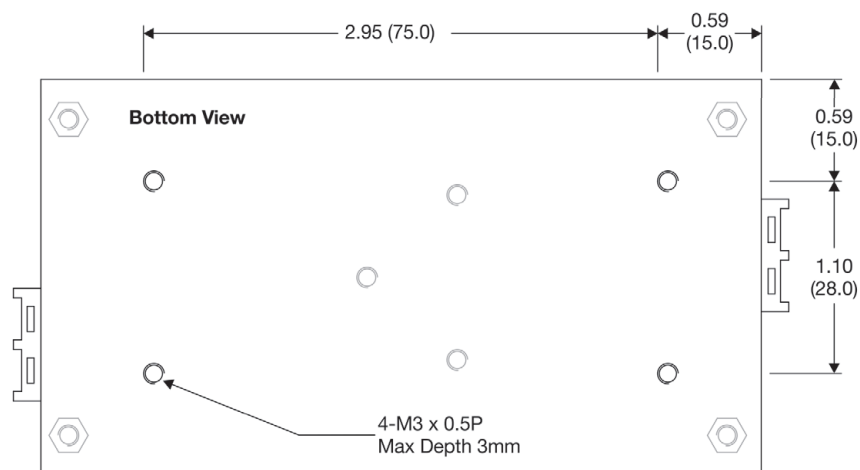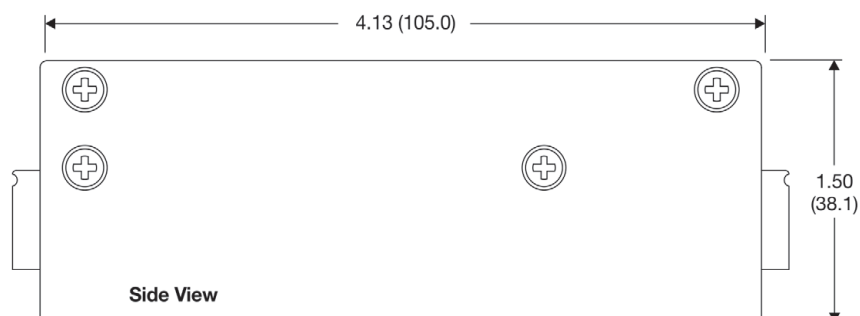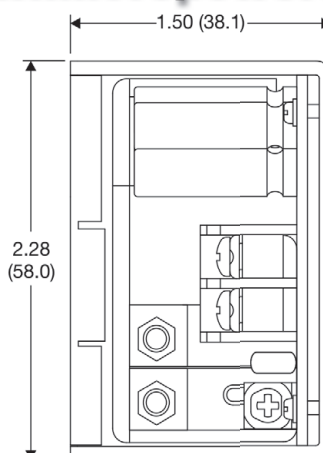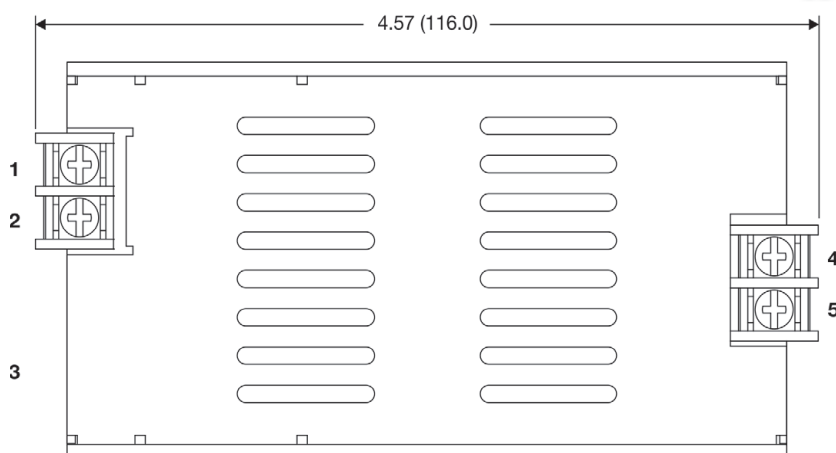

Connections

Input Connector (CN1):

- Barrier Strip Terminal Block: Anytek Connector: DG28S-B-02P M3 Screws 2 terminals, 7.62 mm Centers Suitable Wire = 22 - 14 AWG

Pin	Function
1	AC-Neutral
2	AC-Line

Connection 3 (Field Ground) is a plated through hole on the PC Board.

Output Connector (CN2):

- Barrier Strip Terminal Block: Anytek Connector: DG28S-B-02P M3 Screws 2 terminals, 7.62 mm Centers Suitable Wire = 22 - 14 AWG


Pin	Function
4	+VOUT
5	-VOUT

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.02 (± 0.50)

Related products that may be of interest:

MPO-60S



- 60W Output Power
- Universal 90 - 264 VAC Input
- 4" x 2" Open Frame Construction
- EN 60950 Approved

MPO-120S



- 180W Output Power
- Universal 90 - 264 VAC Input
- Compact Open Frame
- EN 60950 Approved

MPU-120S



- 180W Output Power
- Compact U-Channel Construction
- Cover & DIN Rail kit available
- EN 60950 Approved





MPU-240S




- 240W Output Power
- EN 60950 Approved
- Compact U-Channel Construction
- Cover & DIN Rail Kit Available

OPTIONAL DIN Rail Mounting Kit

www.micropowerdirect.com

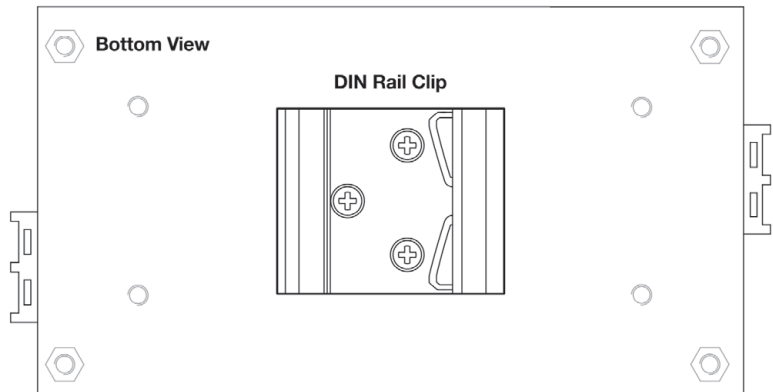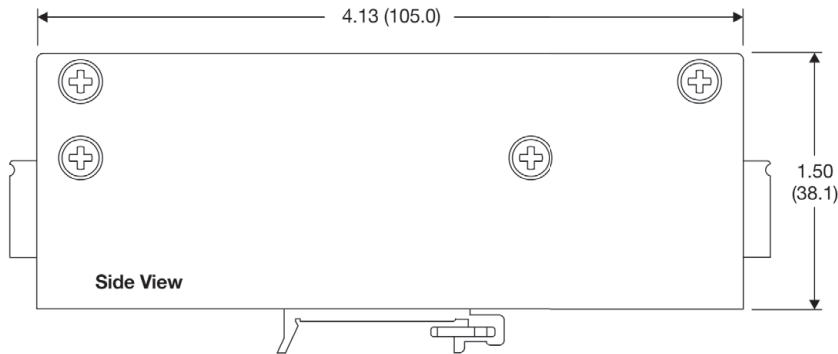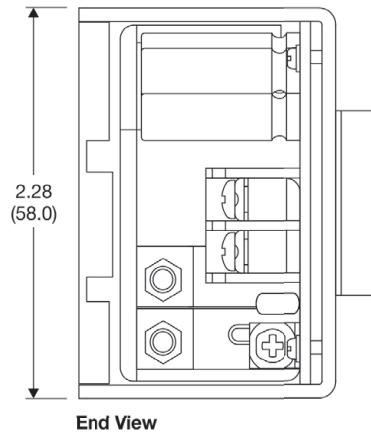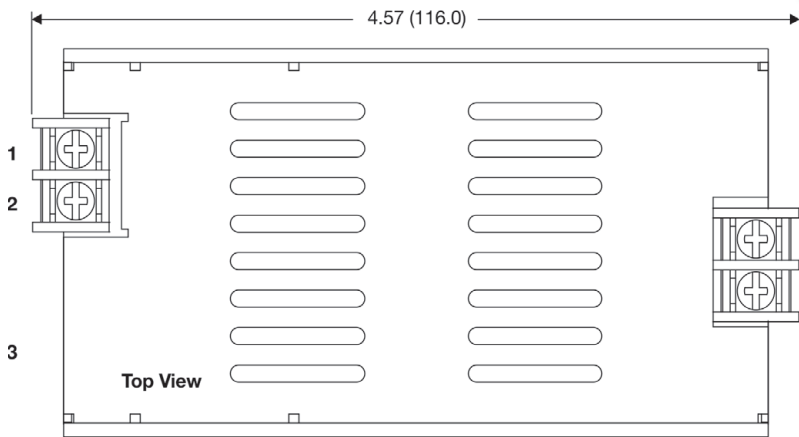

DIN Rail Mounting Kit

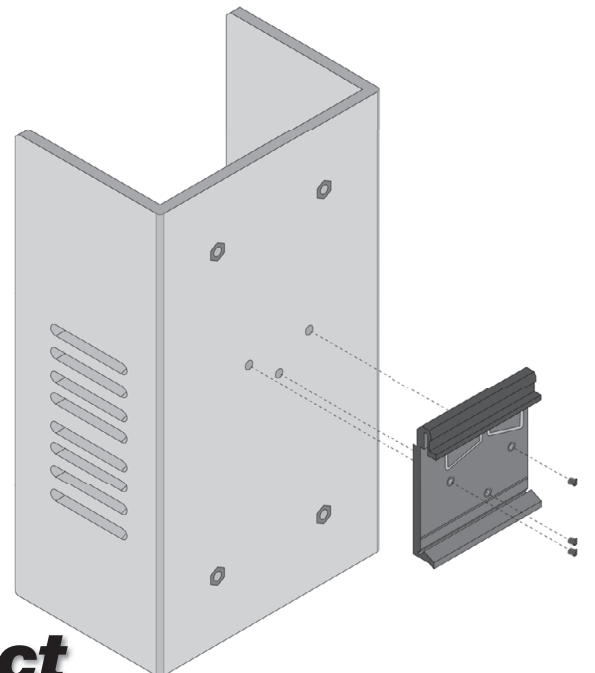

A DIN Rail Mounting kit is available from **MPD**, for use with **MPU-60S "C"** models. The kit contains a mounting clip and three screws.

The clip is attached to the bottom of the unit using the three threaded holes marked "A" on the mechanical diagrams. Screws should not be inserted over 2 mm into the threaded inserts,

To order the kit, ask for part no: **MPU-60S-DRK**

MPD **MicroPower Direct**
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com