


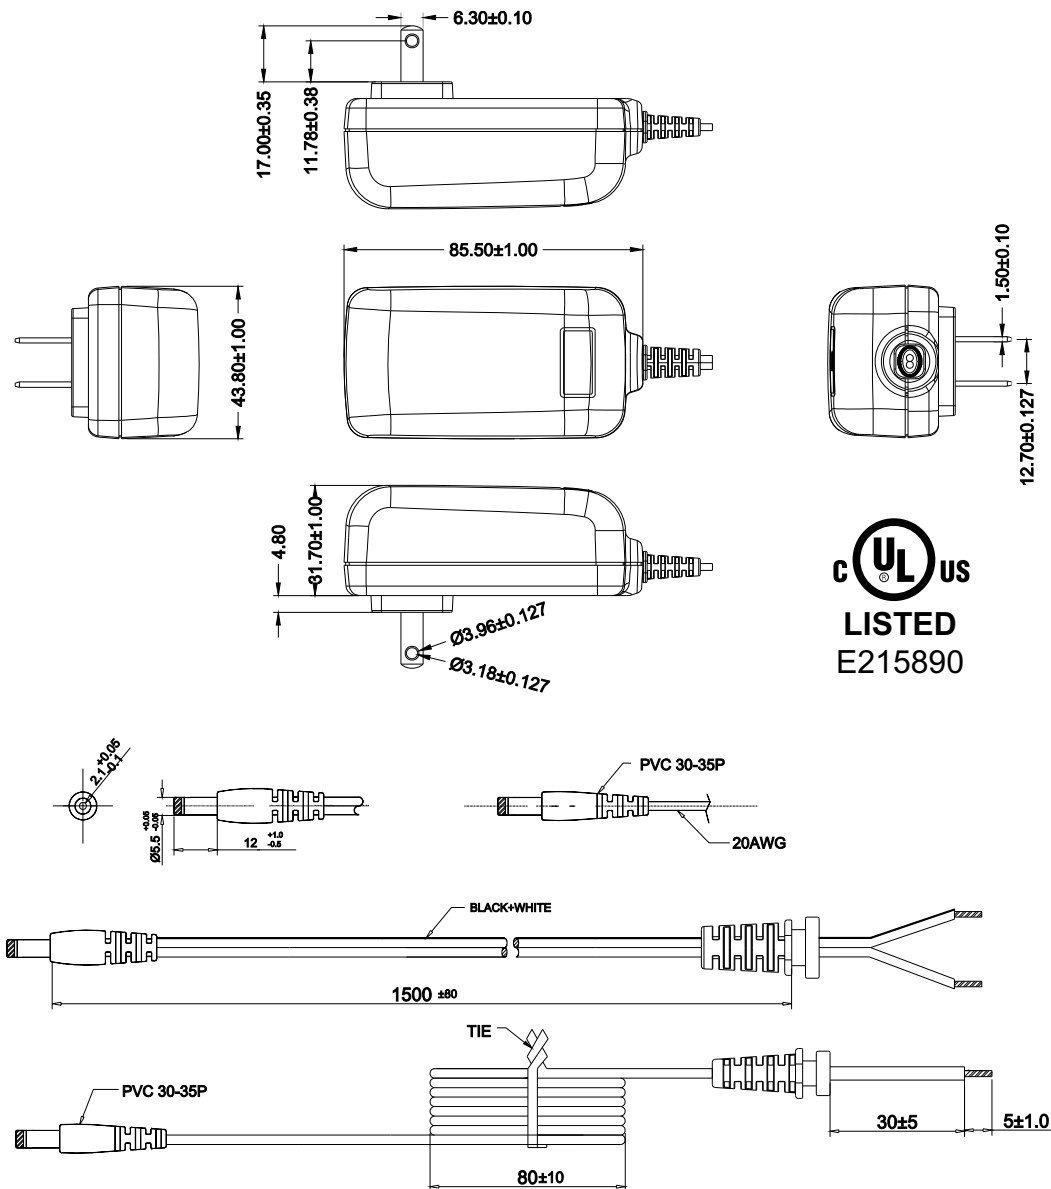

NOTE:

- 1) Level VI Efficiency Switching Power Supply
- 2) Case cover & chassis material: SE-1/PC, BLACK (NO KTEC)
- 3) AC PIN MATERIAL: BRASS (Ni PLATED)
- 4) RoHS
- 5) Satin Finish

Electrical Specification

Input:

Rate Input Voltage:	100-240VAC
Operating Range:	90-264VAC
Rated Input Current:	0.5A Max.
Rated Input Frequency:	50/60Hz ± 3Hz
Maximum Input Power:	17W
Input Current (No Load):	≤ 20mA
Power Cons. (No Load):	Max. 0.1W

Output:

Voltage:	9VDC
Minimum Load Current:	0.0A
Rated Load Current:	1.5A
Output Power:	13.5W

Dimensions:	85.5 x 43.8 x 31.7 mm
Weight:	150 g (Max.)
Operating Temperature:	0°C ~ 40°C
Storage Temperature:	-20°C ~ 80°C
Operating Humidity:	10% ~ 90% (Non Condensing)

NOTE: (unit:mm)

- 1). WIRE TYPE: VW-1 80°C 300V L=1500mm 2468 20AWG 2C BLACK+WHITE
BLACK and WHITE — Positive BLACK — Negative
- 2). THE POLARITY:
- 3). RoHS

TITLE SWITCHING POWER SUPPLY 9VDC / 1.5A		SCALE
		NTS
DRAWING NO. 68-9015PS		
		UNITS mm
FILE NAME 68-9015PS.pdf		SHEET 1/1