


MU075H Series

Features

- Input voltage: 90-305VAC
- High efficiency: 91% typical
- Active PFC: 0.99 typical
- High surge immunity
- Low THD
- IP67 compliant
- Protections: OVP, OCP, OTP, SCP
- Constant Current/0-10V Dimming/Clock Dimming(CLKS)/Standby(STB)
- Compliance to worldwide safety regulations for lighting
- Suitable for dry/damp locations
- CUL \ CE
- 5-year warranty

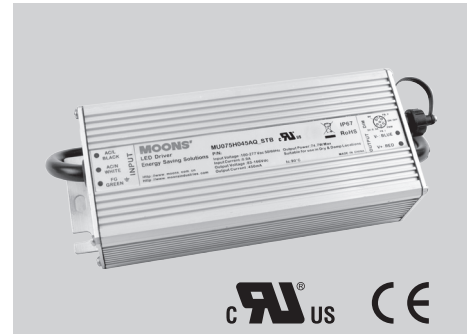

173 x 67.5 x 40mm

Electrical Specifications

Input voltage range	90~305VAC
Frequency	47~63Hz
Power factor	0.99 (typical) , > 0.90 100~277VAC input, 75%~100% load
Input current	1A at 110VAC, 0.5A at 220VAC
Inrush current	60A at 230VAC input 25℃ cold start
Leakage current	0.75mA MAX at 277Vac/60Hz input
Maximum output power	75W
Line regulation	± 1%
Load regulation	± 3%
Start-up time	<1.5s at 110VAC, <0.75s at 220VAC
Protections	over voltage, over current, over temperature, short circuit: auto recovery
THD	< 10% , 220VAC, 50Hz input, 70%~100% load < 15% , 110VAC/277VAC, 60Hz input, 70%~100% load

Environmental Specifications

Operating temperature	-40℃ ~ +70℃
Operating humidity	20% ~ 95% RH
Storage temperature	-40℃ ~ +80℃
Storage humidity	10% ~ 95% RH
Cooling method	convection
Isolation voltage	input / output 3750VAC
MTBF	300,000 hours full load at 25℃ ambient
Life time	50,000 hours, 75℃ TC
Reference dimension (L x W x H)	173 x 67.5 x 40 (mm)
Weight	0.8 kg

Safety & EMC Compliance

CUL	UL8750, UL1012, UL1310, CSA-C22.2 NO. 107.1, CSA-C22.2 NO. 223-M91
CE	EN 61347-1, EN61347-2-13
Conducted emissions	FCC Part15 Class B / EN55015
Radiated emissions	FCC Part15 Class B / EN55015
Harmonic current emissions	EN61000-3-2
Voltage fluctuations and flicker	EN61000-3-3
Electrostatic discharge	EN61000-4-2
RFE field susceptibility	EN61000-4-3
Electrical fast transient	EN61000-4-4
Surge immunity test	EN61000-4-5 (Surge: L-N, 4KV, L/N-Earth, 6KV)
Conducted radio frequency	EN61000-4-6
Power frequency magnetic field test	EN61000-4-8
Voltage dips	EN61000-4-11
Electromagnetic immunity	EN61547

Model Specifications

Model				Output Current	Output Voltage	Current Accuracy	Efficiency (typical)	
Constant Current	0-10V Dimming	Clock Dimming	Standby				110Vac	220Vac
MU075H035AQ	MU075H035AQ_0-10V	MU075H035AQ_CLKS	MU075H035AQ_STB	350mA	107-214VDC	± 5%	90.0%	91.0%
MU075H045AQ	MU075H045AQ_0-10V	MU075H045AQ_CLKS	MU075H045AQ_STB	450mA	83-166VDC	± 5%	90.0%	91.0%
MU075H053AQ	MU075H053AQ_0-10V	MU075H053AQ_CLKS	MU075H053AQ_STB	530mA	71-142VDC	± 5%	89.0%	90.0%
MU075H070AQ	MU075H070AQ_0-10V	MU075H070AQ_CLKS	MU075H070AQ_STB	700mA	54-108VDC	± 5%	89.0%	90.0%
MU075H105AQ	MU075H105AQ_0-10V	MU075H105AQ_CLKS	MU075H105AQ_STB	1050mA	36-72VDC	± 5%	89.0%	90.0%
MU075H140AQ	MU075H140AQ_0-10V	MU075H140AQ_CLKS	MU075H140AQ_STB	1400mA	27-54VDC	± 5%	88.0%	89.0%
MU075H175AQ	MU075H175AQ_0-10V	MU075H175AQ_CLKS	MU075H175AQ_STB	1750mA	21-43VDC	± 5%	88.0%	89.0%
MU075H210AQ	MU075H210AQ_0-10V	MU075H210AQ_CLKS	MU075H210AQ_STB	2100mA	18-36VDC	± 5%	87.0%	88.0%
MU075H245AQ	MU075H245AQ_0-10V	MU075H245AQ_CLKS	MU075H245AQ_STB	2450mA	15-31VDC	± 5%	87.0%	88.0%
MU075H280AQ	MU075H280AQ_0-10V	MU075H280AQ_CLKS	MU075H280AQ_STB	2800mA	13-27VDC	± 5%	86.0%	87.0%
MU075H315AQ	MU075H315AQ_0-10V	MU075H315AQ_CLKS	MU075H315AQ_STB	3150mA	12-24VDC	± 5%	86.0%	87.0%
MU075H375AQ	MU075H375AQ_0-10V	MU075H375AQ_CLKS	MU075H375AQ_STB	3750mA	10-20VDC	± 5%	85.0%	86.0%
MU075H420AQ	MU075H420AQ_0-10V	MU075H420AQ_CLKS	MU075H420AQ_STB	4200mA	9-18VDC	± 5%	85.0%	86.0%
MU075H500AQ	MU075H500AQ_0-10V	MU075H500AQ_CLKS	MU075H500AQ_STB	5000mA	7-15VDC	± 5%	84.0%	85.0%


Remarks: 1.The function instruction can be found in the Appendix Page 151~Page 157.

2. For CLKS driver, there's two versions MU075HXXXAQ_CLKS/W and MU075HXXXAQ_CLKS/C. MU075HXXXAQ_CLKS/W using 3 wires dimming port (programming port), MU075HXXXAQ_CLKS/C using 3 pins water proof connector dimming port (programming port).


3. CLKS driver is compatible with charged configuration mode and uncharged configuration mode.

Mechanical Outline (unit: mm)


Constant Current

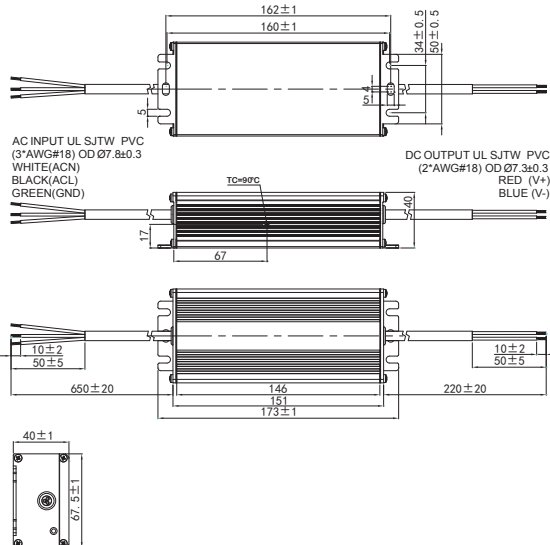


0-10V Dimming / Clock Dimming(CLKS/W)

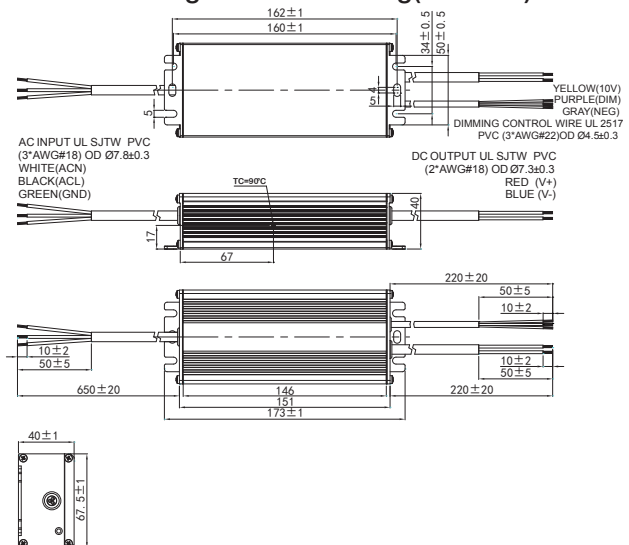

Clock Dimming(CLKS/C)

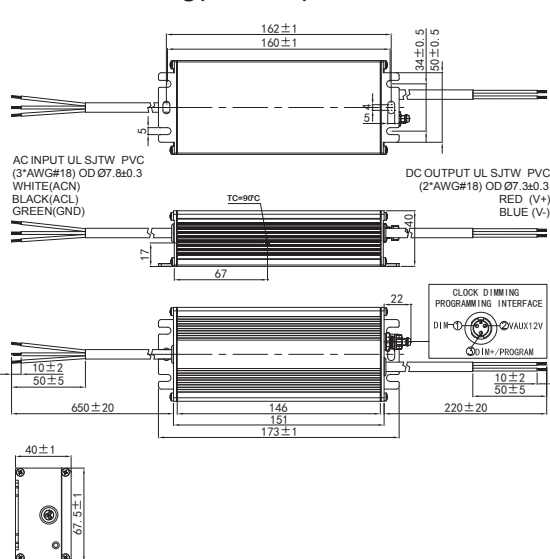

Standby

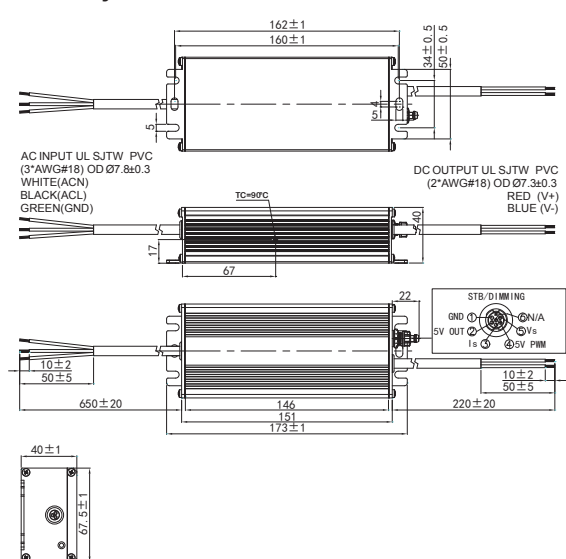

Numbering System

Quick Selection

LED Driver
- General Series
- Outdoor Use
- H Series

LED Driver
- General Series
- Outdoor Use
- Half Potted Series

LED Driver
- General Series
- Outdoor Use
- A Series

LED Driver
- General Series
- Outdoor Use
- Other Series

LED Driver
- Intelligent Series
- 50W Intelligent Series

LED Driver
- Intelligent Series
- 40W Intelligent Series

LED Driver
- Intelligent Series
- 50W Intelligent Series

LED Driver
- Intelligent Series
- 50W Intelligent Series

LED Driver
- Intelligent Series
- Other Series

General Power Supplies
- MP Series

SPD

Appendix