



EN62368-1



BS EN62368-1



UL1202800

www.dia.gov.cn



RoHS



3 year warranty

FEATURES

- Universal 180-600VAC or 254-848VDC input voltage
- Single/Two phase both available
- Operating ambient temperature range: -25℃ to +70℃
- High I/O isolation voltage up to 4000VAC
- Industrial-grade design
- Low ripple & noise, high efficiency, high reliability
- DC OK function
- 150% peak load for 3 seconds
- LED indicator for power on
- Output short circuit, over-current, over-voltage, over-temperature protection
- OVC III, 2000m altitude (UL508, IEC60664 standards)
- Safety according to UL508, IEC62368, IEC60664

LI120-26Bxx is Mornsun AC-DC converter series featuring a cost-effective, energy efficient green power supply solution for standard DIN-rail mounting. The products offer a high level of stability and immunity to noise for industrial control equipment, machinery, and other industrial equipment in a variety of harsh environments. These light weight AC-DC converters have an extremely compact design and the standard rail installation for space saving. With good EMC performance, compliant with UL508, UL61010, EN/IEC62368, IEC60664 standards for EMC and safety.

Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)*	Efficiency at 400VAC (%) Typ.	Capacitive Load (μF) Max.
EN/BIS	LI120-26B12	120	12V/10.0A	12-14	89.5	15000
	LI120-26B24	120	24V/5.0A	24-28	91	10000
	LI120-26B48	120	48V/2.5A	48-55	92	8000

Note: *The actual adjustment range may extend outside the values stated, care should be exercised to ensure that the output voltage and power levels remain within the published maximum values.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	Rated input (certified voltage)		220	--	480	VAC
	AC input		180	--	600	
	DC input		254	--	848	VDC
Input Frequency			47	--	63	Hz
Input Current	230VAC		--	1.2	1.4	A
	400VAC		--	0.7	1.0	
Inrush Current	400VAC	Cold start	--	50	--	
Leakage Current			<3.5mA/rms			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	0% - 100% load	12V output	--	±1.5	±2.0	%
		24V/48V output	--	±1.0	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	400VAC	12V output	--	±0.5	±1.0	
		24V/48V output	--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/24V output	--	--	120	mV
		48V output	--	--	150	
Temperature Coefficient			--	±0.03	--	%/°C

AC/DC 120W DIN-Rail Power Supply

LI120-26Bxx Series

MORNSUN®

Short Circuit Protection		Constant current hiccup, self-recovery
Over-current Protection		$\geq 150\% I_o$, hiccup, self-recovery
Over-voltage Protection	12V output	$\leq 16V$
	24V output	$\leq 35V$
	48V output	$\leq 60V$
Over-temperature Protection		Shutdown output, recovery after restart
Minimum Load		0 -- -- %
Start-up Time	400V input	Room temperature, full load (cold start) -- -- 2 s
DC OK Signal		30VDC/1A Max.
Hold-up Time	230VAC	-- 10 -- ms
	400VAC	-- 50 -- ms

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current < 10mA	4000	--	--	VAC
	Input - PE		2000	--	--	
	Output - PE		500	--	--	
	Output - DC OK	Electric Strength Test for 1min., leakage current < 2mA	500	--	--	
Insulation Resistance	Input - output	500VDC	100	--	--	MΩ
	Input - PE					
	Output - PE					
Operating Temperature			-25	--	+70	℃
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Altitude			--	--	5000	m
Power Derating	+50℃ to +60℃	LI120-26B12	4.0	--	--	% / ℃
	+60℃ to +70℃		3.0	--	--	
	+60℃ to +70℃	LI120-26B24/48	4.0	--	--	% / VAC
	180VAC - 198VAC		2.23	--	--	
	550VAC - 600VAC		0.8	--	--	
	2000m-5000m		5.0	--	--	% / Km
Safety Standard		Design refer to UL61010-1, UL61010-2-201, IS13252 (Part1) & EN62368-1, BS EN62368-1, UL508, IEC62368-1, IEC60664;				
Safety Class		CLASS I				
MTBF		MIL-HDBK-217F@25℃	>300,000 h			

Mechanical Specifications

Case Material	Metal (AL1100, SPCC, SGCC)
Package Dimensions	124.00 x 41.00 x 110.00 mm
Weight	550g (Typ.)
Cooling Method	Free air convection

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.22-A/6




Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32 EN55032	CLASS B	
	RE	CISPR32 EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
	Voltage flicker	IEC/EN61000-3-3		
Immunity	ESD	IEC/EN61000-4-2	Contact ±4KV/Air ±8KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	Perf. Criteria A
	Surge	IEC/EN61000-4-5	Line to line ±2KV/line to ground ±4KV	Perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria A

Product Characteristic Curve

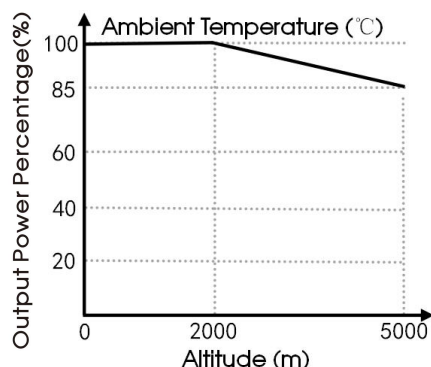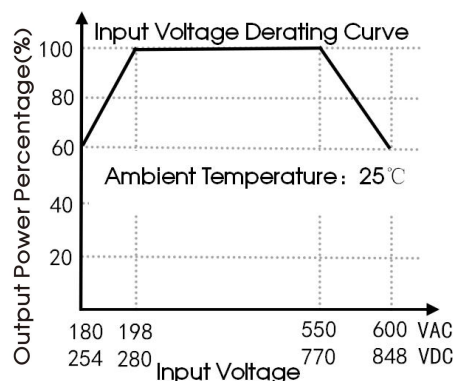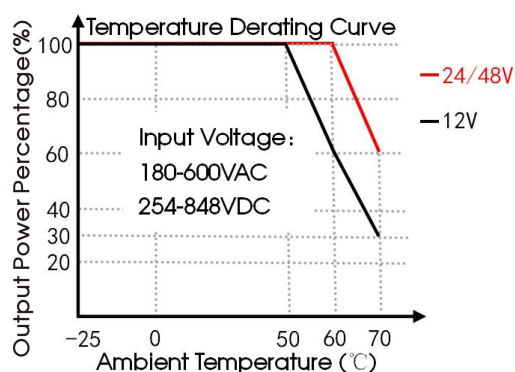


Note: ① With an AC input between 180-198VAC/550-600VAC and a DC input between 254-280VDC/770-848VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling; For applications in closed environment please consult Mornsun FAE.

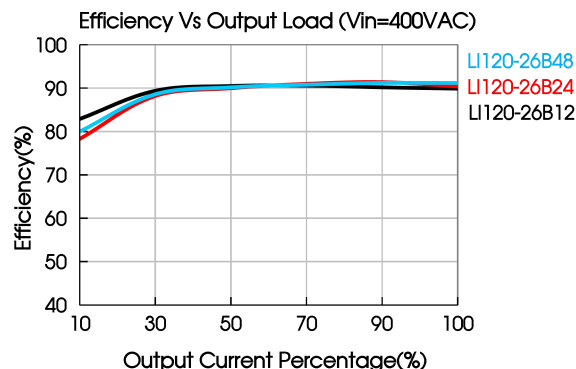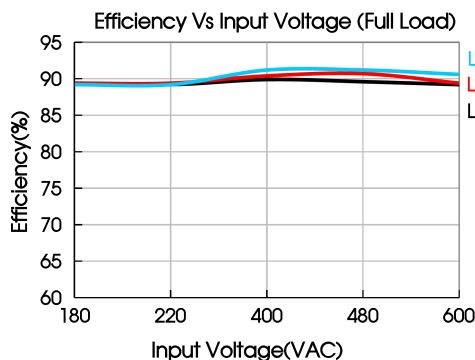

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

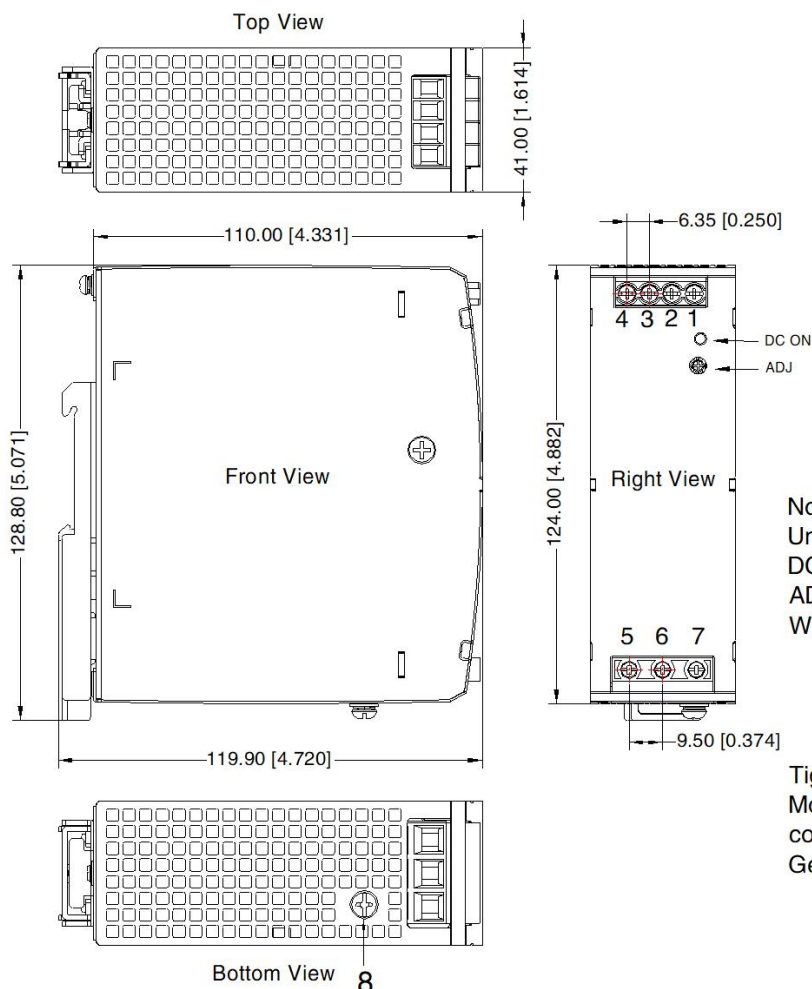

Pin-Out	
Pin	Mark
1	+Vo
2	-Vo
3	DC OK
4	
5	AC(L1)
6	AC(L2)
7	⊕

7, 8 any position must be connected to the earth(⊕)

Note:
 Unit: mm[inch]
 DC ON: Output status indicator LED
 ADJ: Output adjustable resistor
 Wire range: Input: 26-10 AWG
 Output: 12V: 16-10AWG
 24V: 20-10AWG
 48V: 22-10AWG
 DC OK: 24-16AWG
 Tightening torque: Max 0.5 N·m
 Mounting rail: TS35, rail needs to connect safety ground
 General tolerances: $\pm 1.00 [\pm 0.039]$

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220199;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- The room temperature derating of $5^\circ\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No.8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com