

# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

# MORNSUN®



### FEATURES

- Universal 90 - 132VAC or 180 - 264VAC or 240 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40℃ to +85℃
- Low standby power consumption: <0.75W@230VAC
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- Operating altitude up to 5000m
- OVC III (designed to meet EN62477)
- 3 years warranty
- Safety according to UL62368, EN62477

CE Report

EN62368-1  
EN60335-1  
EN61558-1

CB

IEC62368-1

UK

BS EN62368-1

CCC

GB4943.1

RoHS



UL131001 Part 1:2010  
IEC 60335-1:2005  
UL131001 Part 2:2010  
UL131001 Part 3:2010  
UL131001 Part 4:2010  
UL131001 Part 5:2010  
UL131001 Part 6:2010  
UL131001 Part 7:2010  
UL131001 Part 8:2010  
UL131001 Part 9:2010  
UL131001 Part 10:2010  
UL131001 Part 11:2010  
UL131001 Part 12:2010  
UL131001 Part 13:2010  
UL131001 Part 14:2010  
UL131001 Part 15:2010  
UL131001 Part 16:2010  
UL131001 Part 17:2010  
UL131001 Part 18:2010  
UL131001 Part 19:2010  
UL131001 Part 20:2010  
UL131001 Part 21:2010  
UL131001 Part 22:2010  
UL131001 Part 23:2010  
UL131001 Part 24:2010  
UL131001 Part 25:2010  
UL131001 Part 26:2010  
UL131001 Part 27:2010  
UL131001 Part 28:2010  
UL131001 Part 29:2010  
UL131001 Part 30:2010  
UL131001 Part 31:2010  
UL131001 Part 32:2010  
UL131001 Part 33:2010  
UL131001 Part 34:2010  
UL131001 Part 35:2010  
UL131001 Part 36:2010  
UL131001 Part 37:2010  
UL131001 Part 38:2010  
UL131001 Part 39:2010  
UL131001 Part 40:2010  
UL131001 Part 41:2010  
UL131001 Part 42:2010  
UL131001 Part 43:2010  
UL131001 Part 44:2010  
UL131001 Part 45:2010  
UL131001 Part 46:2010  
UL131001 Part 47:2010  
UL131001 Part 48:2010  
UL131001 Part 49:2010  
UL131001 Part 50:2010  
UL131001 Part 51:2010  
UL131001 Part 52:2010  
UL131001 Part 53:2010  
UL131001 Part 54:2010  
UL131001 Part 55:2010  
UL131001 Part 56:2010  
UL131001 Part 57:2010  
UL131001 Part 58:2010  
UL131001 Part 59:2010  
UL131001 Part 60:2010  
UL131001 Part 61:2010  
UL131001 Part 62:2010  
UL131001 Part 63:2010  
UL131001 Part 64:2010  
UL131001 Part 65:2010  
UL131001 Part 66:2010  
UL131001 Part 67:2010  
UL131001 Part 68:2010  
UL131001 Part 69:2010  
UL131001 Part 70:2010  
UL131001 Part 71:2010  
UL131001 Part 72:2010  
UL131001 Part 73:2010  
UL131001 Part 74:2010  
UL131001 Part 75:2010  
UL131001 Part 76:2010  
UL131001 Part 77:2010  
UL131001 Part 78:2010  
UL131001 Part 79:2010  
UL131001 Part 80:2010  
UL131001 Part 81:2010  
UL131001 Part 82:2010  
UL131001 Part 83:2010  
UL131001 Part 84:2010  
UL131001 Part 85:2010  
UL131001 Part 86:2010  
UL131001 Part 87:2010  
UL131001 Part 88:2010  
UL131001 Part 89:2010  
UL131001 Part 90:2010  
UL131001 Part 91:2010  
UL131001 Part 92:2010  
UL131001 Part 93:2010  
UL131001 Part 94:2010  
UL131001 Part 95:2010  
UL131001 Part 96:2010  
UL131001 Part 97:2010  
UL131001 Part 98:2010  
UL131001 Part 99:2010  
UL131001 Part 100:2010

LM350-20BxxR2 series is the ultra-small Mornsun second-generation new industrial standard enclosed power supply, which has innovated the industrial power supply standard from the aspect of dimension, performance, technology and structure. It features general AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN/BS EN62368, EN60335, EN61558, EN62477, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

### Selection Guide\*

Certification	Part No.*	Output Power (W)*	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
EN/CQC/IEC/BIS	LM350-20B12R2	348.0	12.0V/29.0A	11.4 - 13.8	85.5	4000
	LM350-20B15R2	349.5	15.0V/23.3A	14.25 - 17.25	86.0	3300
	LM350-20B24R2	350.4	24.0V/14.6A	22.8 - 27.6	88.0	1500
	LM350-20B36R2	349.2	36.0V/9.7A	32.4 - 39.6	88.5	1500
	LM350-20B48R2	350.4	48.0V/7.3A	43.2 - 52.8	89.0	470
EN/CQC/IEC	LM350-20B54R2	351.0	54.0V/6.5A	51.3 - 56.7	88.5	330

Note:  
1.\*Use suffix "C" for terminal with protective cover, suffix "Q" for bottom conformal coating and "QQ" for both sides conformal coating;  
2.\*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current.  
3.\*The product picture is for reference only. For details, please refer to the actual product.

### Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	Low voltage (switch in position of 115)	90	--	132	VAC
		High voltage (switch in position of 230)	180	--	264	
	DC input	Switch in position of 230	240	--	370	DAC
Input Frequency	AC input		47	--	63	Hz
Input Current	115VAC		--	6.8	8	A
	230VAC		--	3.4	4	
Inrush Current	115VAC		--	60	--	
	230VAC		--	60	--	
Start-up Delay Time	115VAC		--	--	3000	ms
	230VAC		--	--	3000	
Hot Plug			Unavailable			

### Output Specifications\*

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	12V	--	1.5	--	%
		15V/24V/36V/48V/54V	--	1.0	--	

# MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.23-A/6

Page 1 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation





# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

**MORNSUN®**

Line Regulation	Rated load		--	0.5	--		
Load Regulation	0% - 100% load	12V/15V	--	1.0	--		
		24V/36V/48V/54V	--	0.5	--		
Minimum Load			0	--	--		
Stand-by Power Consumption	25℃, 230VAC		--	--	0.75		W
Ripple & Noise*	20MHz bandwidth (peak-peak value)	12V/15V	--	180	--		mV
		24V/36V/48V	--	240	--		
		54V	--	300	--		
Temperature Coefficient	230VAC, 0℃ to 50℃		--	--	0.03	%/℃	
Hold-up Time	115VAC, rated load		--	12	--	ms	
	230VAC, rated load		--	16	--		
Short Circuit Protection*			Hiccup, continuous, self-recover				
Over-current Protection			130% - 220% Io, self-recover				
Over-voltage Protection	12V		≤16.2V	Hiccup, self-recover			
	15V		≤21.0V				
	24V		≤33.6V				
	36V		≤46.8V	Hiccup, self-recover or output voltage clamp			
	48V		≤63.0V				
	54V		≤70.0V				
Over-temperature Protection			Hiccup, self-recover				
Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to enclosed Switching Power Supply Application Notes for specific information; 2.*Recover time <5s after the short circuit disappear;							

### General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Test	Input - output	Electric strength test for 1min., leakage current <5mA	4000	--	--	VAC	
	Input - 	Electric strength test for 1min., leakage current <3mA	2000	--	--		
	Output - 		500	--	--		
Insulation Resistance	Input - output	Environment temperature: 25±5℃	100	--	--	M Ω	
	Input - 	Relative humidity: <95%RH, non-condensing	100	--	--		
	Output - 	Testing voltage: 500VDC	100	--	--		
Operating Temperature			-40	--	+85	℃	
Storage Temperature			-40	--	+85		
Storage Humidity		Non-condensing	10	--	95	%RH	
Operating Humidity			20	--	90		
Switching Frequency			--	65	--	KHz	
Power Derating		Operating temperature derating	-40℃ to -30℃	2.0	--	--	% /℃
			+50℃ to +85℃	2.0	--	--	
Leakage Current		264VAC	Touch leakage current	<0.5mA			
			Earth leakage current	<2.0mA			
Safety Standards		12V/15V/24V/36V/48V		GB4943.1, IS13252 (Part1), IEC60951-1 safety approved & IEC/BS EN/EN62368-1, EN60335-1, EN61558-1; Design refer to UL62368-1, EN62477-1			
		54V		GB4943.1 safety approved & IEC/BS EN/ EN62368-1, EN60335-1, EN61558-1; Design refer to UL62368-1, EN62477-1			
Safety Class			CLASS I				
MTBF		MIL-HDBK-217F@25℃	> 300,000 h				
Warranty			3 years				

**MORNSUN®**

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.23-A/6

Page 2 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### General Specifications

Case Material	Metal (AL5052, SGCC)
Dimensions	179.00mm x 106.00mm x 30.00mm
Weight	570g (Typ.)
Cooling Method	Forced air cooling

### Electromagnetic Compatibility (EMC)\*

Emissions	CE	CISPR32 EN55032	150kHz - 30MHz, CLASS A	
		CISPR32 EN55032	150kHz - 30MHz, CLASS B (See Fig. 1 for Wiring Diagram)	
	RE	CISPR32 EN55032	30MHz - 1GHz, CLASS A	
		CISPR32 EN55032	30MHz - 1GHz, CLASS B (See Remark 1*)	
Immunity*	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	Perf. Criteria A
	RS	IEC/EN61000-4-3	80MHz - 1GHz 10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 4\text{KV}$ , (5 or 100)kHz	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ /line to PE $\pm 4\text{KV}$	Perf. Criteria A
		IEC/EN61000-4-5	line to line $\pm 4\text{KV}$ /line to PE $\pm 6\text{KV}$ (See Fig. 1 for Wiring Diagram)	Perf. Criteria A
	PFMF	IEC/EN61000-4-8	30A/m	Perf. Criteria A
	CS	IEC/EN61000-4-6	0.15MHz - 80MHz 10Vr.m.s	Perf. Criteria A
	Voltage dips	IEC/EN61000-4-11	0%, 70%	Perf. Criteria A
	Voltage interruption	IEC/EN61000-4-11	0% of 230Vac, 0Vac, 5000ms	Perf. Criteria B

#### Remark:

1. \*The power supply should be regarded as a part of the system, and the radiation emissions can be achieved by adding a filter FC-L06Wx and adding a magnetic ring at the output or shielding measures.

2. \*The power supply does not meet the requirements of harmonic current stipulated in EN61000-3-2; This power supply is not suitable for the following situations.

1) The terminal equipment is used in the European Union.

2) The terminal equipment is connected to public mains supply with 220VAC or greater rated nominal voltage that mandatory to meet the requirements of EN61000-3-2.

3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.

4) The power supply belong to a part of lighting system.

In addition, the power supply can be used in the following terminals which do not need to meet EN61000-3-2;

(1) Professional equipment with total fixed input power greater than 1000W;

(2) symmetrical controlled heating element with rated power less than or equal to 200W.

3. \*If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.



4. \*perf. Criteria:

A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention;

C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

### Product Characteristic Curve

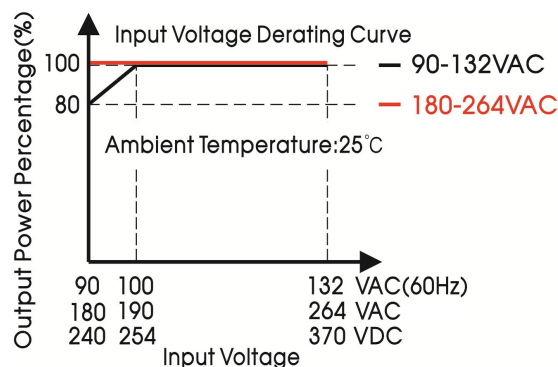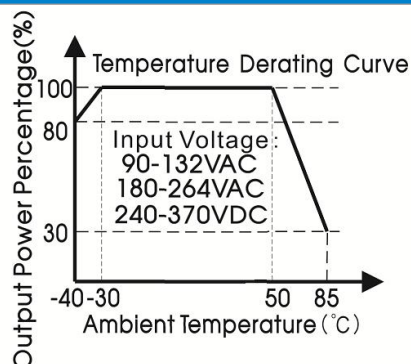

#### Notes:

1. With an AC input voltage between 90 - 100VAC (60HZ) and a DC input between 240 - 254VDC the output power must be derated as per the temperature derating curves;



2. This product is suitable for applications using forced air cooling; for applications in closed environment please consult Mornsun FAE.;

3. When the input voltage is less than 110VAC with 30% load after long-term storage at low temperature -40°C, under such extreme conditions, it is recommended to start with <30% load before full load.

# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

**MORNSUN®**

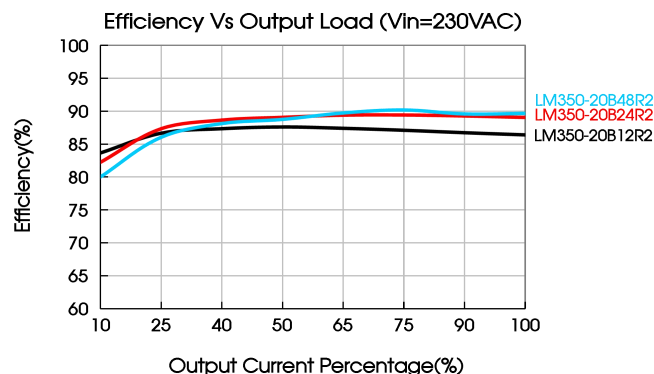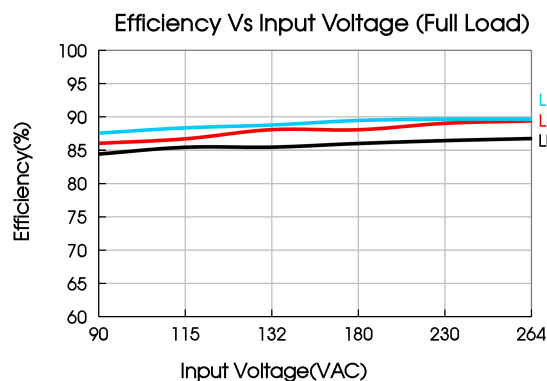

### FC-L06W2 & LM350-20BxxR2 Wiring Diagram



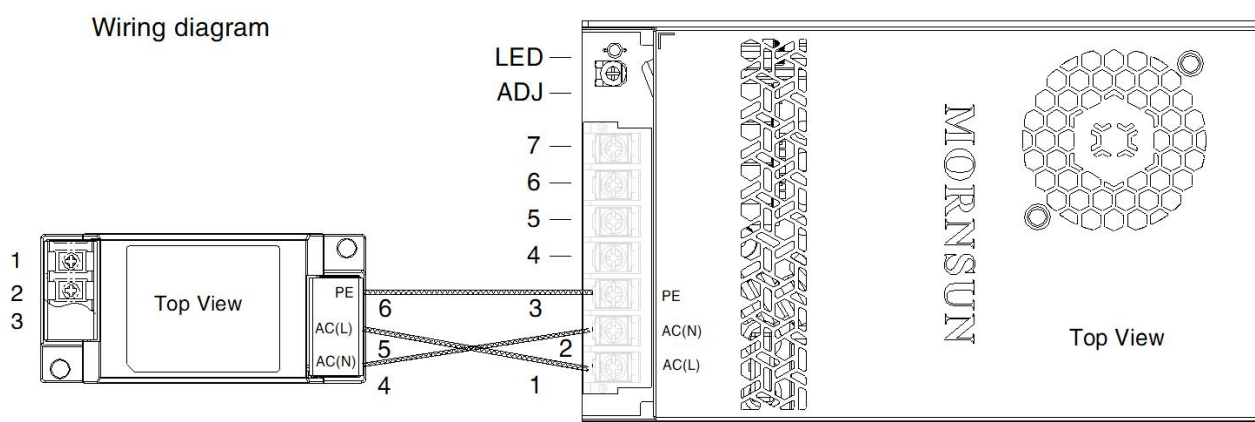


Fig. 1: EMC application circuit with higher requirements

### Dimensions and Recommended Layout

#### LM350-20BxxR2、LM350-20BxxR2-Q Series

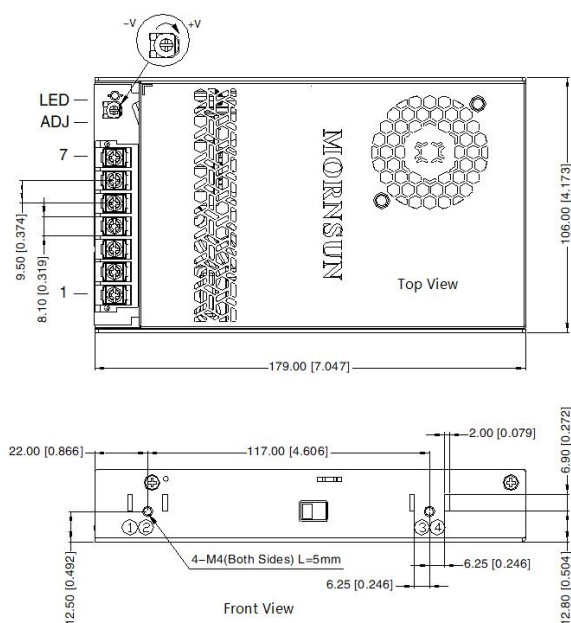

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	⊥
4	-Vo
5	-Vo
6	+Vo
7	+Vo

Switch	AC Input	DC Input
115V	90-132VAC	---
230V	180-264VAC	240-370VDC

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.23-A/6

Page 4 of 6


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

**MORNSUN®**

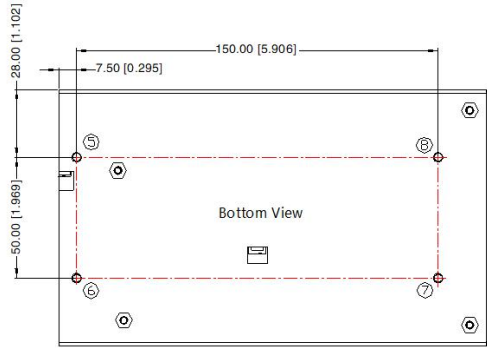

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M4	5mm	0.9N · m
⑤ - ⑧	M4	3mm	0.9N · m

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 12V, 15V: 14-10AWG


24V, 36V: 18-10AWG

48V, 54V: 20-10AWG

Pin1-7 connector tightening torque: M3.5, 0.8N · m max.

General tolerances:  $\pm 1.00[\pm 0.039]$



### LM350-20BxxR2-C Series

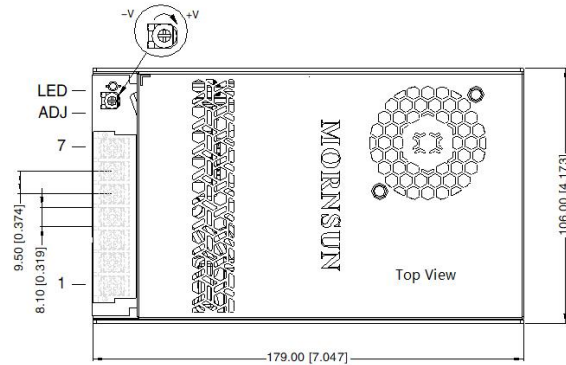


THIRD ANGLE PROJECTION



Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

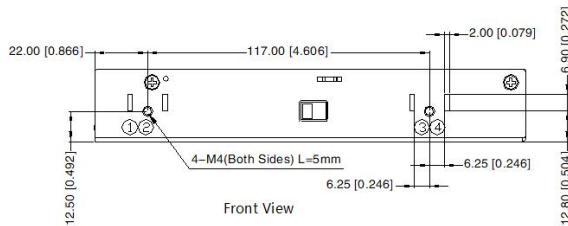

Switch	AC Input	DC Input
	90-132VAC	---
	180-264VAC	240-370VDC

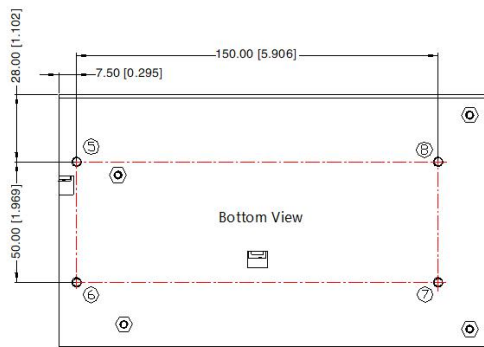

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M4	5mm	0.9N · m
⑤ - ⑧	M4	3mm	0.9N · m

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 12V, 15V: 14-10AWG

24V, 36V: 18-10AWG

48V, 54V: 20-10AWG

Pin1-7 connector tightening torque: M3.5, 0.8N · m max.

General tolerances:  $\pm 1.00[\pm 0.039]$

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220303;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity <75%RH with nominal input voltage and rated output load;
3. The room temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE ( $\perp$ ) of system when the terminal equipment in operating;
9. The output voltage can be adjusted by the ADJ, clockwise to increase;
10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
11. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)