


V1-S/D01(02) Series

1W Unregulated Dual Separate output



Features

- 7 Pin SIL / 14 Pin DIL Package
- 1000 VDC Isolation
- Up to 3000 VDC Isolation
- Low Ripple and Noise
- Efficiency up to 80%
- -40 ~ 85°C Operation Temperature Range
- Non-Conductive Black Plastic Case



The V1 series is a family of cost effective 1W dual separate output DC-DC converters. These converters achieve low cost and ultra-miniature SIP 7 pin or DIP 14 pin size. Devices are encapsulated using flame retardant resin. The models operate from input voltage of 5, 12, 24, 48 Vdc with output voltage of 3.3, 5, 7.2, 9, 12, 15, 18, 24 Vdc. High performance features include 1000Vdc~3000Vdc input/output isolation, high efficiency operation and output voltage accuracy of $\pm 3\%$ maximum. Standard features include an input range of $\pm 10\%$ tolerance and low output noise and ripple.

All specifications typical at $T_a = 25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 3\%$
Line regulation	$\pm 1.2\%$ / Per 1% Vin Change
Load regulation	(From 20% to 100% Load) $\pm 10\%$ (Output 3.3V Model) $\pm 20\%$
Ripple & noise(20 MHz bandwidth)(1)	75mV pk-pk
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	$\pm 10\%$
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	Capacitors
Input Reflected Ripple Current(3)	20mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table
I/O Isolation Voltage(3 sec)	
Input/Output1&Output2	1000~3000Vdc
Output1/Output2	1000Vdc
I/O Isolation Capacitance	60 pF Typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	Variable 80kHz
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.121 Mhrs
Safety Standard : (designed to meet)	IEC 60950-1



PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	0.5mm Alloy42 Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	(SIP/2.3g) (DIP/2.6g)
Dimensions	SIP Case 0.76"x0.24"x0.39" DIP Case 0.80"x0.40"x0.27"

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40°C~85°C(See Derating Curve)
Maximum Case Temperature	100°C
Storage Temperature	-40°C~125°C
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS(4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Voltage(100ms)	
5 Modes	0~7 Vdc
12 Modes	0~15 Vdc
24 Modes	0~28 Vdc
48 Modes	0~54 Vdc
Lead Soldering Temperature (1.5mm from case 10sec.)	260°C

V1 - 1W Unregulated Dual Separate output

PARTNUMBER STRUCTURE

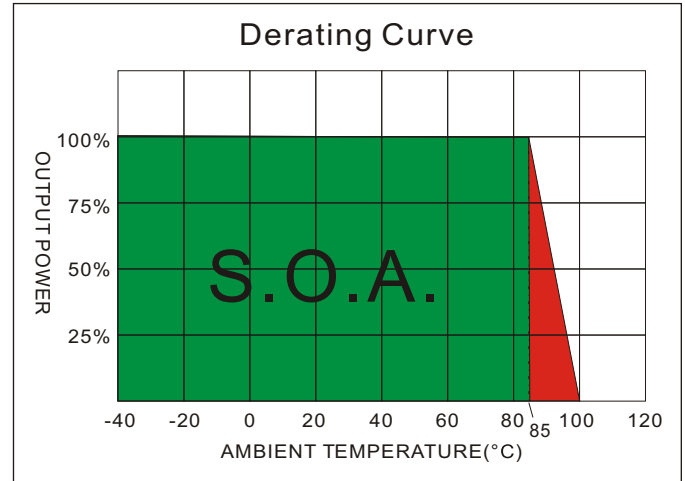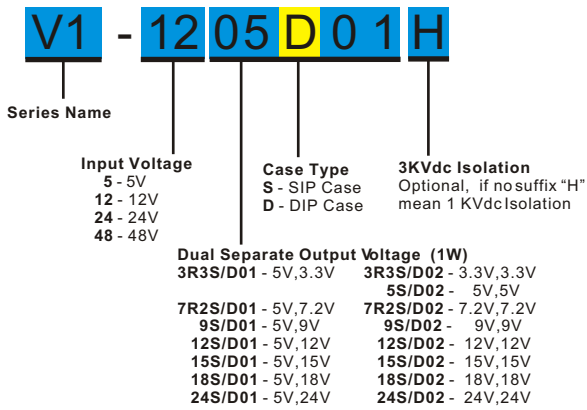

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage(Vdc) Output1 Output2	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Full load(mA)	Output1 Output2		
V1-053R3S/D01	5	25	259	5 , 3.3	100 , 152		77	100
V1-057R2S/D01	5	25	266	5 , 7.2	100 , 69		75	100
V1-0509S/D01	5	25	259	5 , 9	100 , 56		77	100
V1-0512S/D01	5	25	259	5 , 12	100 , 42		77	100
V1-0515S/D01	5	25	256	5 , 15	100 , 33		78	100
V1-123R3S/D01	12	15	106	5 , 3.3	100 , 152		78	100
V1-127R2S/D01	12	15	111	5 , 7.2	100 , 69		75	100
V1-1209S/D01	12	15	108	5 , 9	100 , 56		77	100
V1-1212S/D01	12	15	92	5 , 12	100 , 42		80	100
V1-1215S/D01	12	15	106	5 , 15	100 , 33		78	100
V1-243R3S/D01	24	8	55	5 , 3.3	100 , 152		75	100
V1-247R2S/D01	24	8	55	5 , 7.2	100 , 69		75	100
V1-2409S/D01	24	8	54	5 , 9	100 , 56		77	100
V1-2412SD/01	24	8	53	5 , 12	100 , 42		78	100
V1-2415S/D01	24	8	53	5 , 15	100 , 33		78	100

- 1.Input Voltage is from 5V to 48V and Output Voltage is from 3.3V to 24V.
- 2.Suffix "H" means 3 KVdc isolation

V1 - 1W Unregulated Dual Separate output

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage(Vdc) Output1 Output2		OUTPUT Current Full load(mA) Output1 Output2		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)						
V1-0505S/D02	5	25	266	5 , 5		100 , 100		75	100
V1-057R2S/D02	5	25	259	7.2 , 7.2		69 , 69		77	100
V1-0509S/D02	5	25	253	9 , 9		56 , 56		79	100
V1-0512S/D02	5	25	250	12 , 12		42 , 42		80	100
V1-0515S/D02	5	25	243	15 , 15		33 , 33		82	100
V1-1205S/D02	12	15	111	5 , 5		100 , 100		75	100
V1-127R2S/D02	12	15	108	7.2 , 7.2		69 , 69		77	100
V1-1209S/D02	12	15	108	9 , 9		56 , 56		77	100
V1-1212S/D02	12	15	104	12 , 12		42 , 42		80	100
V1-1215S/D02	12	15	102	15 , 15		33 , 33		81	100
V1-2405S/D02	24	8	55	5 , 5		100 , 100		75	100
V1-247R2S/D02	24	8	54	7.2 , 7.2		69 , 69		77	100
V1-2409S/D02	24	8	52	9 , 9		56 , 56		79	100
V1-2412SD/02	24	8	50	12 , 12		42 , 42		82	100
V1-2415S/D02	24	8	50	15 , 15		33 , 33		82	100

1. Input Voltage is from 5V to 48V and Output Voltage is from 3.3V to 24V.


2. Suffix "H" means 3 KVdc isolation

NOTE

1. Ripple/Noise measured with 20MHz bandwidth.
2. Tested by minimal V_{in} and constant resistive load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.


V1 - 1W Unregulated Dual Separate output

MECHANICAL SPECIFICATIONS

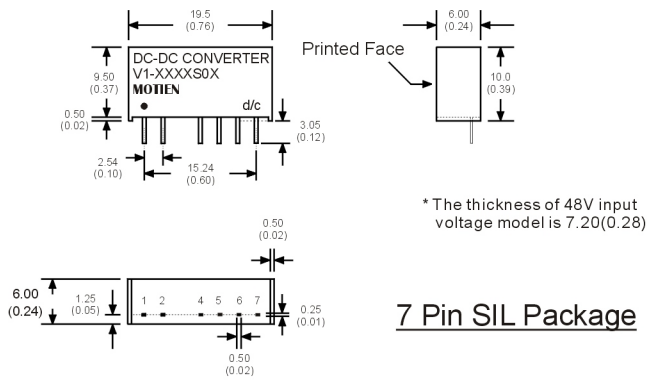

PIN CONNECTIONS	
PIN NUMBER	Dual Separate
1	+V Input
2	-V Input
4	+V1 Output
5	-V1 Output
6	+V2 Output
7	-V2 Output

(The Pin Connection of high isolation one is the same with normal one.)

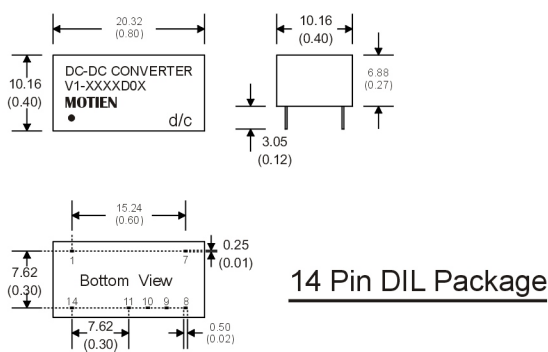

PIN CONNECTIONS	
PIN NUMBER	Dual Separate
1	-V Input
7	N.C
8	-V2 Output
9	+V2 Output
10	-V1 Output
11	+V1 Output
14	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)