

V6-5W Series

5W 2:1 Regulated Single & Dual output

Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 83%
- -40 ~ 85°C Operation Temperature Range
- Metal Case Standard, Optional Plastic Case





The V6 series is a family of cost effective 5W single & dual output DC-DC converters. These converters are consisted with Nickle-coated copper in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 12, 24 and 48 with output voltage of 3.3, 5, 9, 12, 15, 24, ± 3.3 , ± 5 , ± 9 , ± 12 , ± 15 and ± 24 Vdc. High performance features include high efficiency operation up to 83% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a = 25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$	Case Material	Nickel-coated Copper
Line regulation	$\pm 0.5\%$		Non-conductive Black Plastic (UL94V-0 rated)
Load regulation	$\pm 0.5\%$	Base Material	Non-conductive Black Plastic (UL94V-0 rated)
	(Output 3.3V / $\pm 3.3\text{V}$ Model) $\pm 1.5\%$	Pin Material	$\varnothing 0.5\text{mm}$ Brass Solder-coated
Ripple & noise (20 MHz bandwidth)(1)	60mV pk-pk	Potting Material	Epoxy (UL94V-0 rated)
Short circuit protection	Indefinite (Automatic Recovery)	Weight	17.0g (Metal Case) / 13.5g (Plastic Case)
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$	Dimensions	1.25" x 0.8" x 0.4"
Capacitor load(2)	See table		
INPUT SPECIFICATIONS		ENVIRONMENT SPECIFICATIONS	
Voltage Range	See table	Operating Temperature	$-40^\circ\text{C} \sim 85^\circ\text{C}$ (See Derating Curve)
Max. Input Current	See table	Maximum Case Temperature	100°C
No-Load Input Current	See table	Storage Temperature	$-40^\circ\text{C} \sim 125^\circ\text{C}$
Input Filter	PI Type	Cooling	Nature Convection
Input Reflected Ripple Current(3)	35mA pk-pk		
GENERAL SPECIFICATIONS		ABSOLUTE MAXIMUM RATINGS(4)	
Efficiency	See table, typ	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
I/O Isolation Voltage(3 sec)		Input Voltage(100ms)	
Input/Output	1500~3500Vdc	12 Modes	-0.7~24 Vdc
Metal Case/Input & Output	1000Vdc	24 Modes	-0.7~40 Vdc
I/O Isolation Capacitance	470 pF Typ.	48 Modes	-0.7~80 Vdc
I/O Isolation Resistance	1000M Ohm	Soldering Temperature	260°C
Switching Frequency	Typical 266kHz	(1.5mm from case 10sec.)	
Humidity	95% rel H		
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.121 Mhrs		
Safety Standard : (designed to meet)	IEC 60950-1		

V6 - 5W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

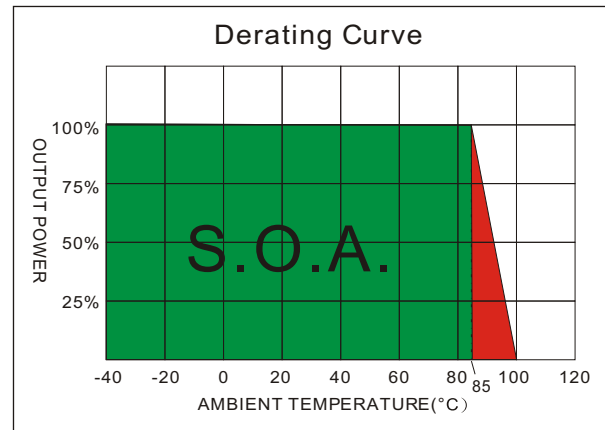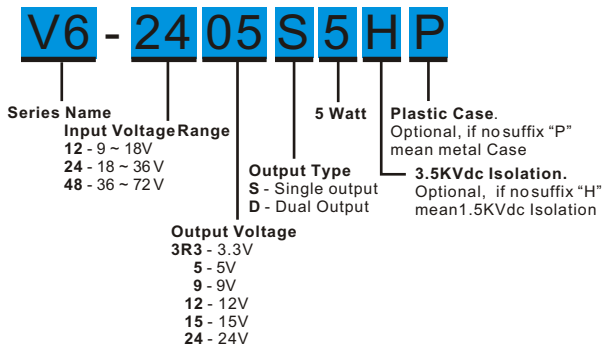

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
V6-123R3S5	9-18	30	490	3.3	0	1300	73	1000
V6-1205S5	9-18	30	542	5	0	1000	77	1000
V6-1209S5	9-18	30	534	9	0	555	78	680
V6-1212S5	9-18	30	514	12	0	417	81	330
V6-1215S5	9-18	30	520	15	0	333	80	220
V6-1224S5	9-18	30	520	24	0	208	80	68
V6-123R3D5	9-18	30	565	±3.3	0	±750	73	±680
V6-1205D5	9-18	30	542	±5	0	±500	77	±330
V6-1209D5	9-18	30	520	±9	0	±278	80	±220
V6-1212D5	9-18	30	520	±12	0	±208	80	±100
V6-1215D5	9-18	30	528	±15	0	±167	79	±47
V6-1224D5	9-18	30	520	±24	0	±104	80	±33
V6-243R3S5	18-36	20	239	3.3	0	1300	75	1000
V6-2405S5	18-36	20	261	5	0	1000	80	1000
V6-2409S5	18-36	20	254	9	0	555	82	680
V6-2412S5	18-36	20	261	12	0	417	80	330
V6-2415S5	18-36	20	255	15	0	333	82	220
V6-2424S5	18-36	20	255	24	0	208	82	68
V6-243R3D5	18-36	20	275	±3.3	0	±750	75	±680
V6-2405D5	18-36	20	267	±5	0	±500	78	±330
V6-2409D5	18-36	20	251	±9	0	±278	83	±220
V6-2412D5	18-36	20	261	±12	0	±208	80	±100
V6-2415D5	18-36	20	261	±15	0	±167	80	±47
V6-2424D5	18-36	20	261	±24	0	±104	80	±33
V6-483R3S5	36-72	12	120	3.3	0	1300	75	1000
V6-4805S5	36-72	12	131	5	0	1000	80	1000
V6-4809S5	36-72	12	127	9	0	555	82	680
V6-4812S5	36-72	12	131	12	0	417	80	330
V6-4815S5	36-72	12	126	15	0	333	83	220
V6-4824S5	36-72	12	126	24	0	208	83	68

Suffix "H" means 3.5KVdc isolation

Suffix "P" means Plastic case instead of standard Metal Case

V6 - 5W 2:1 Regulated Single & Dual output


MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
V6-483R3D5	36-72	12	142	±3.3	0	±750	73	±680
V6-4805D5	36-72	12	132	±5	0	±500	79	±330
V6-4809D5	36-72	12	132	±9	0	±278	79	±220
V6-4812D5	36-72	12	131	±12	0	±208	80	±100
V6-4815D5	36-72	12	131	±15	0	±167	80	±47
V6-4824D5	36-72	12	131	±24	0	±104	80	±33

Suffix "H" means 3.5KVdc isolation


Suffix "P" means Plastic case instead of standard Metal Case

NOTE


1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

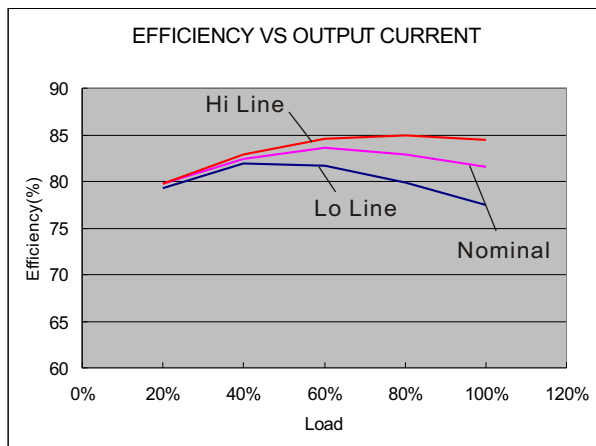

12 Models

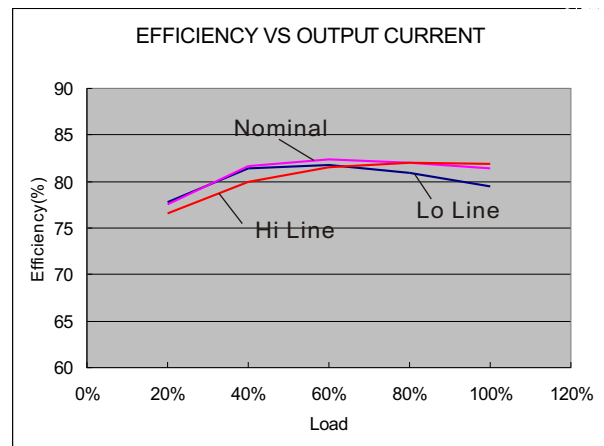


24 Models

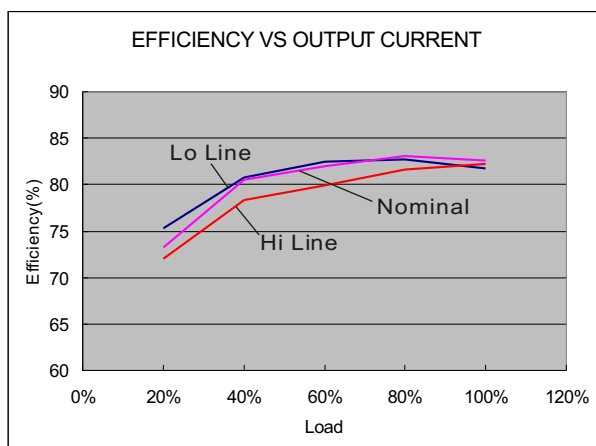

48 Models

V6 - 5W 2:1 Regulated Single & Dual output

MECHANICAL SPECIFICATIONS

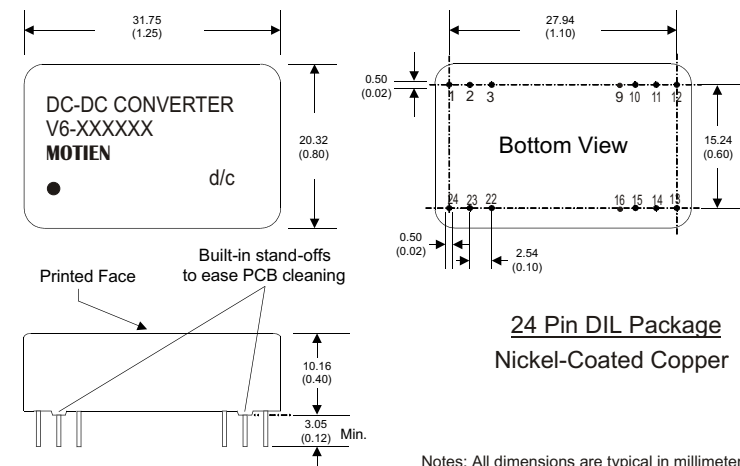


Notes: All dimensions are typical in millimeters (inches).

1. Pin diameter: 1.0 ± 0.05 (0.02 ± 0.002)
2. Pin pitch tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.

MECHANICAL SPECIFICATIONS

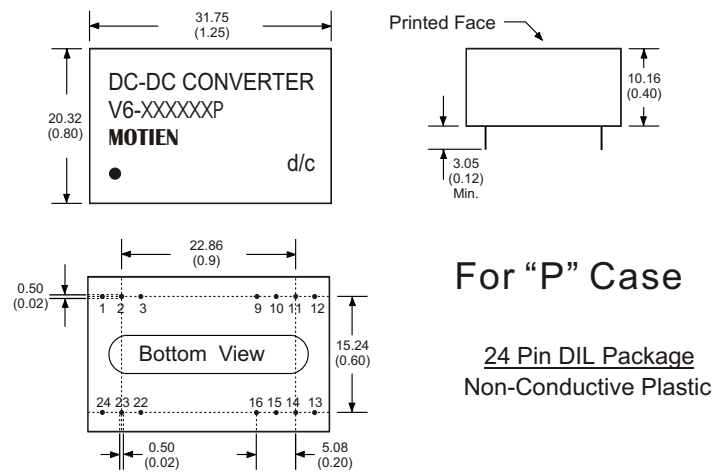

For "P" Case

24 Pin DIL Package
Non-Conductive Plastic

Notes: All dimensions are typical in millimeters (inches).

1. Pin diameter: 1.0 ± 0.05 (0.02 ± 0.002)
2. Pin pitch tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.