


# Pyroelectric Infrared Sensors

## Fresnel Lens

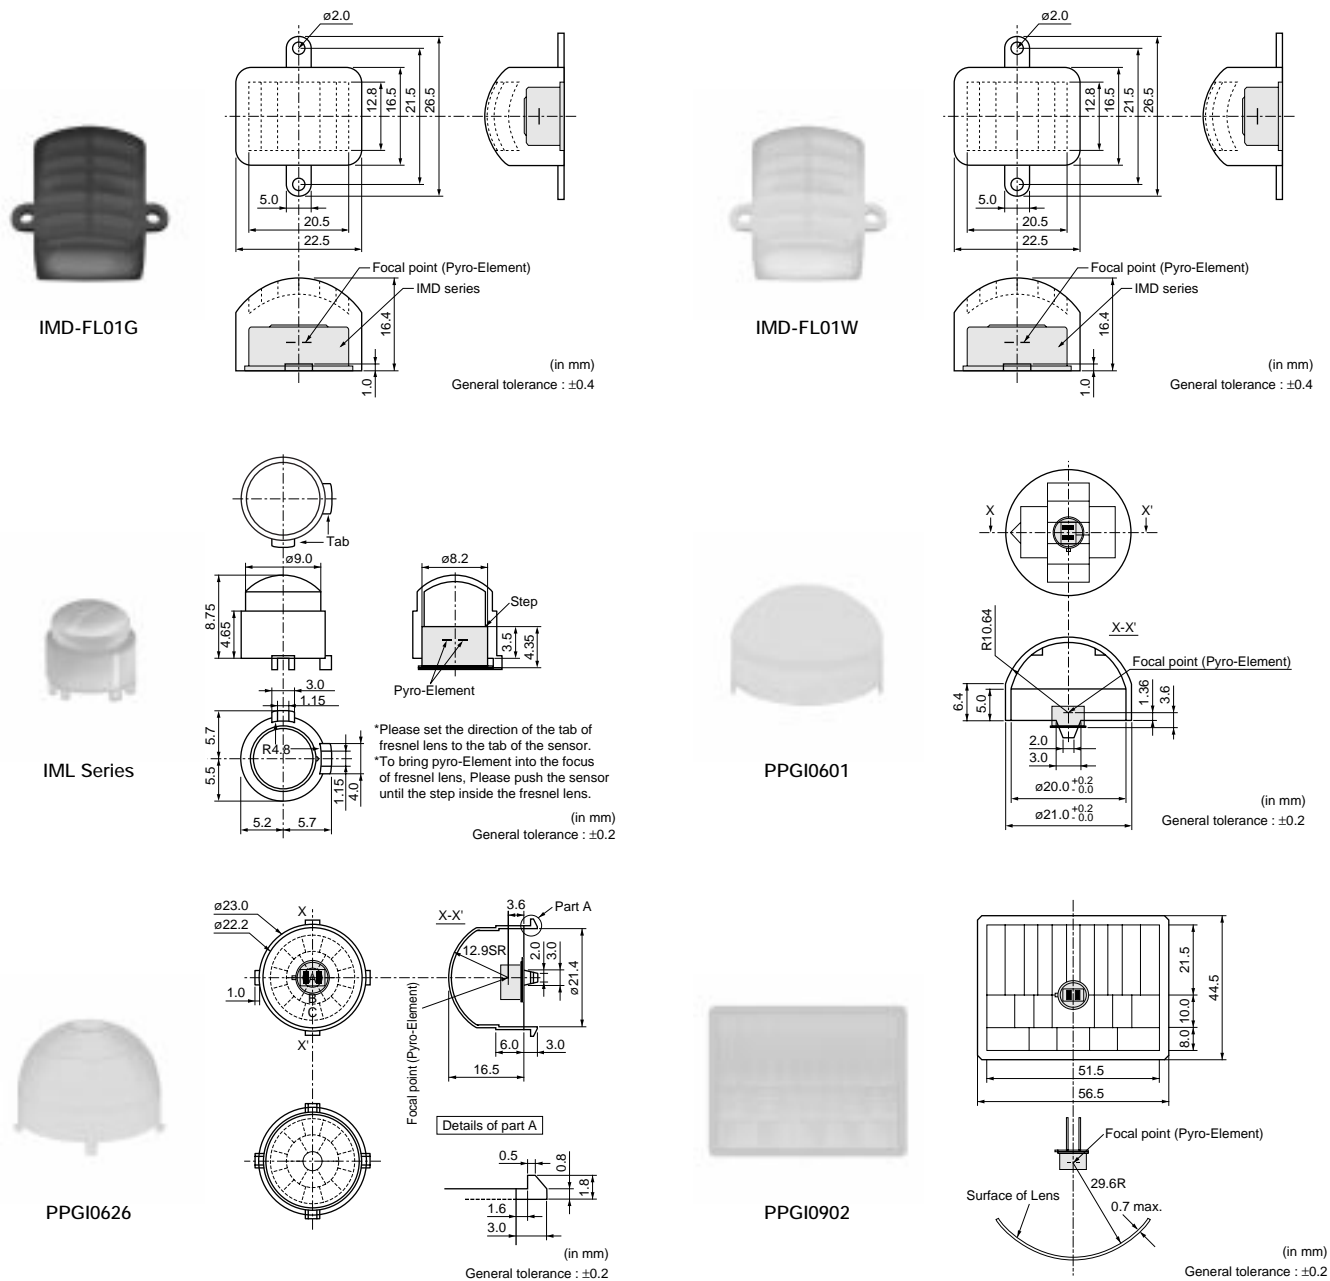

Part Number	Material	Color	Operating Temperature Range (°C)
<b>IMD-FL01G</b>	High density polyethylene	Dark Gray	-20 to 60
<b>IMD-FL01W</b>	High density polyethylene	Natural(White)	-20 to 60
<b>IML-0635</b>	High density polyethylene	Natural(White)	-25 to 55
<b>IML-0636</b>	High density polyethylene	Natural(White)	-25 to 55
<b>IML-0637</b>	High density polyethylene	Natural(White)	-25 to 55
<b>PPGI0601</b>	High density polyethylene	Natural(White)	-25 to 55
<b>PPGI0626</b>	High density polyethylene	Natural(White)	-25 to 55
<b>PPGI0902</b>	High density polyethylene	Natural(White)	-20 to 60

**Note** • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and **CAUTION** (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.  
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.