

## 2:1 WIDE INPUT RANGE DC/DC CONVERTER

### WPC10R



#### FEATURES

- SAFETY APPROVALS (cULus, CE)
- MEETS EN55022 LEVEL A & B FOR CONDUCTED EMISSIONS WITH A 10 MICROFARAD EXTERNAL CAPACITOR
- SPECIFICATION TEMPERATURE RANGE: -40°C TO +100°C
- INDUSTRY STANDARD PINOUTS
- INDUSTRY STANDARD PACKAGE
- LOW PROFILE 0.4 INCH (10MM)
- SHORT CIRCUIT PROTECTION
- TEMPERATURE SHUTDOWN
- REMOTE ON/OFF (OPTIONAL)
- LOW RADIATED EMISSIONS

#### APPLICATIONS


- TELECOMMUNICATION APPLICATIONS
- BATTERY POWERED SYSTEMS
- PORTABLE INSTRUMENTS
- PROCESS CONTROL EQUIPMENT
- TRANSPORTATION EQUIPMENT
- DISTRIBUTED POWER SYSTEMS

#### DESCRIPTION

The WPC10R is a family of high performance DC/DC converters that offer regulated outputs over two input voltage ranges of 18 - 36 and 28 - 75V and over a wide specification temperature range of -40°C to +100°C.

The 350kHz switching frequency and forward converter topology provide optimum performance in a space-saving package. The design uses all surface mounted components, including magnetics, to provide enhanced reliability. All models will operate even under no-load conditions, although a minimum load is specified for load regulation measurement purposes. A metal package is utilized for decreased radiated noise and an optional remote enable feature allows low power standby operation.

#### SIMPLIFIED CIRCUIT DIAGRAM

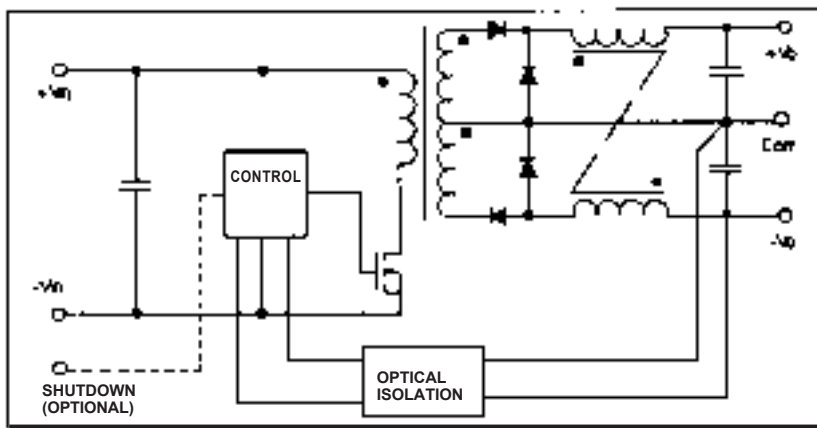

#### AGENCY APPROVALS



# ELECTRICAL SPECIFICATIONS

Specifications typical at  $T_A = +25^{\circ}\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT		VOLTAGE REGULATION		NOISE (mVpp)	EFFICIENCY (%)
			MIN LOAD (mA)	RATED LOAD (mA)	LINE ( $\pm$ )	LOAD ( $\pm$ )		
WPC10R24S03	24	3.3	300	3000	0.5%	1%	75	75
WPC10R24S05	24	5	200	2000	0.5%	1%	75	77
WPC10R24S12	24	12	83	833	0.5%	1%	75	78
WPC10R24S15	24	15	67	666	0.5%	1%	75	79
WPC10R24D05	24	$\pm 5$	$\pm 100$	$\pm 1000$	0.5%	2%	75	74
WPC10R24D12	24	$\pm 12$	$\pm 42$	$\pm 417$	0.5%	2%	75	78
WPC10R24D15	24	$\pm 15$	$\pm 33$	$\pm 333$	0.5%	2%	75	79
WPC10R48S03	48	3.3	300	3000	0.5%	1%	75	77
WPC10R48S05	48	5	200	2000	0.5%	1%	75	79
WPC10R48S12	48	12	83	833	0.5%	1%	75	80
WPC10R48S15	48	15	67	666	0.5%	1%	75	81
WPC10R48D05	48	$\pm 5$	$\pm 100$	$\pm 1000$	0.5%	2%	75	79
WPC10R48D12	48	$\pm 12$	$\pm 42$	$\pm 417$	0.5%	2%	75	80
WPC10R48D15	48	$\pm 15$	$\pm 33$	$\pm 333$	0.5%	2%	75	81

# COMMON SPECIFICATIONS

Specifications typical at  $T_A = +25^{\circ}\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>INPUT</b>					
Voltage Range	$V_{IN}=34-75$ for $3.3V_{out}$	18	24	36	VDC
Reflected Ripple Current		28	48 20	75 50	VDC mAp-p
<b>ISOLATION</b>					
Test Voltage	60 Hz, 10 Seconds	1500			Vpk
Resistance			10		G $\Omega$
Capacitance			1500		pF
Leakage Current	$V_{ISO} = 240\text{VAC}$ , 60Hz		100		mArms
<b>OUTPUT</b>					
Rated Power				10	Watts
Voltage Setpoint Accuracy			$\pm 1$		%
Temperature Coefficient			$\pm 0.02$		%/ $^{\circ}\text{C}$
Line Regulation	Low Line to High Line				
Singles			$\pm 0.2$		%
Duals			$\pm 0.2$		%
Load Regulation	Min Load to Rated Load				
Singles			$\pm 0.2$		%
Duals			$\pm 0.5$		%
Ripple & Noise	BW = 5 Hz to 20 MHz			75	mVp-p
<b>GENERAL</b>					
Switching Frequency			350		kHz
MTTF per MIL-HDBK-217, Rev F	Circuit Stress Method,		933		hr
Ground Benign	$T_A = +25^{\circ}\text{C}$				
Package Weight			35		g
<b>TEMPERATURE</b>					
Specification (ambient)		-40		+71	$^{\circ}\text{C}$
Specification (case)		-40		+100	$^{\circ}\text{C}$
Storage		-55		+125	$^{\circ}\text{C}$


## ABSOLUTE MAXIMUM RATINGS

Output Short Circuit Protection  
(at  $T_A = 25^\circ\text{C}$ , nominal input voltage) ..... Continuous  
Internal Power Dissipation..... 2.5W  
Lead Temperature (soldering 10seconds, max) .....  $+300^\circ\text{C}$   
Maximum Case Temperature .....  $+110^\circ\text{C}$


## ORDERING INFORMATION

	WPC10R	xyzz	N/P/F	R
Device Family				
Indicates Wide Input Voltage 10 Watt Regulated Unit				
Model Number				
Selected from Table of Electrical Characteristics				
xx = Input Voltage				
y = Number of Outputs (Single "S", Dual "D")				
zz = Output Voltage				
Case Ground Option				
"P" = Positive Input Connection				
"N" = Negative Input Connection				
"F" = Floating Input Connection				
Remote ON/OFF (optional)				

## MECHANICAL

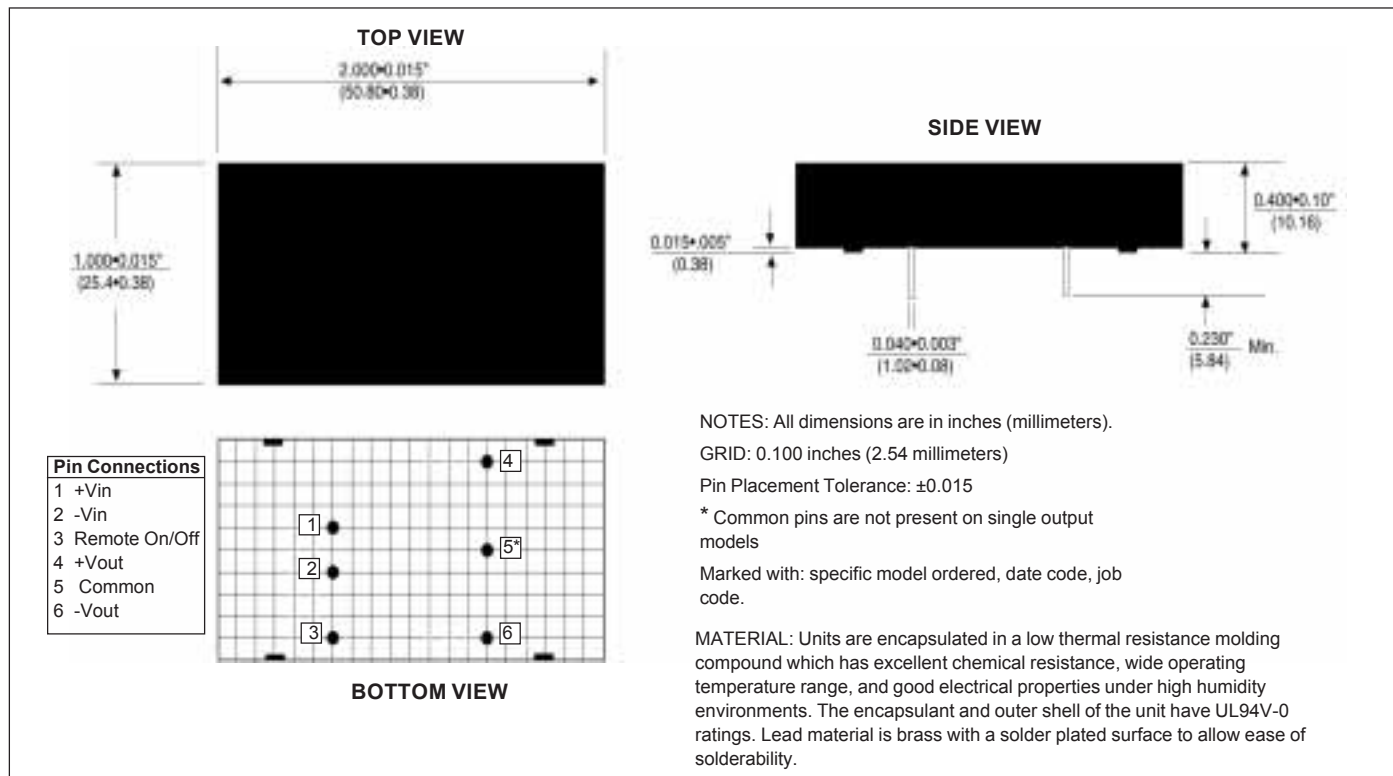

## THERMAL DERATING CURVE

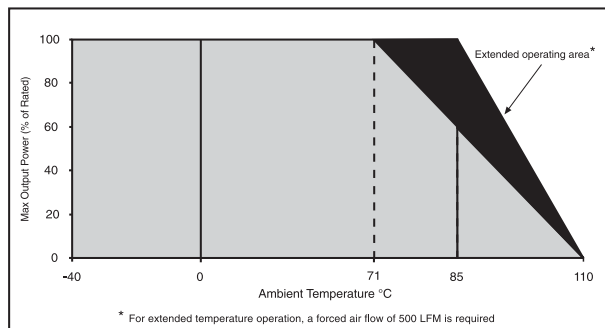

Testing for UL approval was obtained without an input fuse. All UL criteria were met. Although it is good engineering practice to use an input fuse, one is not required for safety reasons.

## REMOTE ON/OFF CONTROL

Logic Compatibility ..... CMOS or Open Collector TTL  
 EC On ..... Open Circuit or  $> 2\text{VDC}$   
 EC Off .....  $< 1.3\text{VDC}$   
 Shutdown Idle Current .....  $< 10\text{mA}$   
 Control Common ..... -Vin

**Power Electronics Division, Americas**  
3400 E Britannia Drive, Tucson, Arizona 85706  
Tel: 800.547.2537 Fax: 520.295.4197

**C&D Technologies, EMEA/Asia/Pacific**  
Milton Keynes MK14 5BU UK  
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.