

OV02K10 2-megapixel product brief



available in
a lead-free
package

2.9 μm Image Sensor Enables High-Quality, Low-Light Video for Smartphones

OmniVision's OV02K is a video-centric, 2.9 μm 1080p image sensor designed for smartphones. Built on our PureCel®Plus pixel technology, the OV02K allows the secondary camera in multi-camera configurations to capture high-quality videos, even in very low ambient light conditions. With the increasing demand from smartphone users for high-quality video, particularly for social media sharing, the OV02K is perfect for capturing super-high-quality video captures even in a wide variety of environments.

The OV02K's 2.9 μm pixel size imparts it with greater sensitivity and very low noise, resulting in an SNR10 of less than 10 lux. This sensor, which comes in a 1/2.8" optical format, features 1080p resolution at up to 120 frames per second (fps), suitable for either standard or slow-motion video capture. It also supports up to three exposures of staggered timing to enable high dynamic range (HDR), and supports frame-to-frame dual conversion gain (DCG).

Find out more at www.ovt.com.




Applications

- Mobile Smartphones
- Dual Cameras
- Action / IoT cameras

Product Features

- support for image size:
 - 1920 x 1080
 - VGA
 - QVGA, and any cropped size
- high dynamic range
- high sensitivity
- programmable conversion gain
- image sensor processor functions:
 - defective pixel cancellation
 - automatic black level correction, etc.
- pixel data: 12b RAW RGB
- SCCB for register programming
- programmable GPIOs
- high speed serial data transfer with MIPI CSI-2 or LVDS
- external frame synchronization capability
- embedded temperature sensor
- one time programmable (OTP) memory

OV02K10




Ordering Information

- OV02K10-GA5A-Z
(color, chip probing, 150 μm backgrinding, reconstructed wafer with good die)

Technical Specifications

- active array size: 1920 x 1080
- maximum image transfer rate:
 - 40X3 fps @ 1080p in 10-bit
 - 30X3 fps @ 1080p in 12-bit
- power requirements:
 - active: 250 mW
- power supply:
 - analog: 2.8V
 - digital: 1.1V
 - I/O pads: 1.8V
- temperature range:
 - operating: -30°C to +85°C junction temperature
- output interfaces: up to 4-lane MIPI CSI-2 or LVDS
- lens size: 1/2.8"
- lens chief ray angle: 35.5°
- scan mode: progressive
- shutter: rolling shutter
- output formats:
 - linear output
 - dual exposure HDR (long and short)
 - 3-exposure HDR (long, short, and very short)
 - conversion gain programmable in each channel
- pixel size: 2.9 μm x 2.9 μm
- image array area: 5614.4 μm x 3178.4 μm

Functional Block Diagram

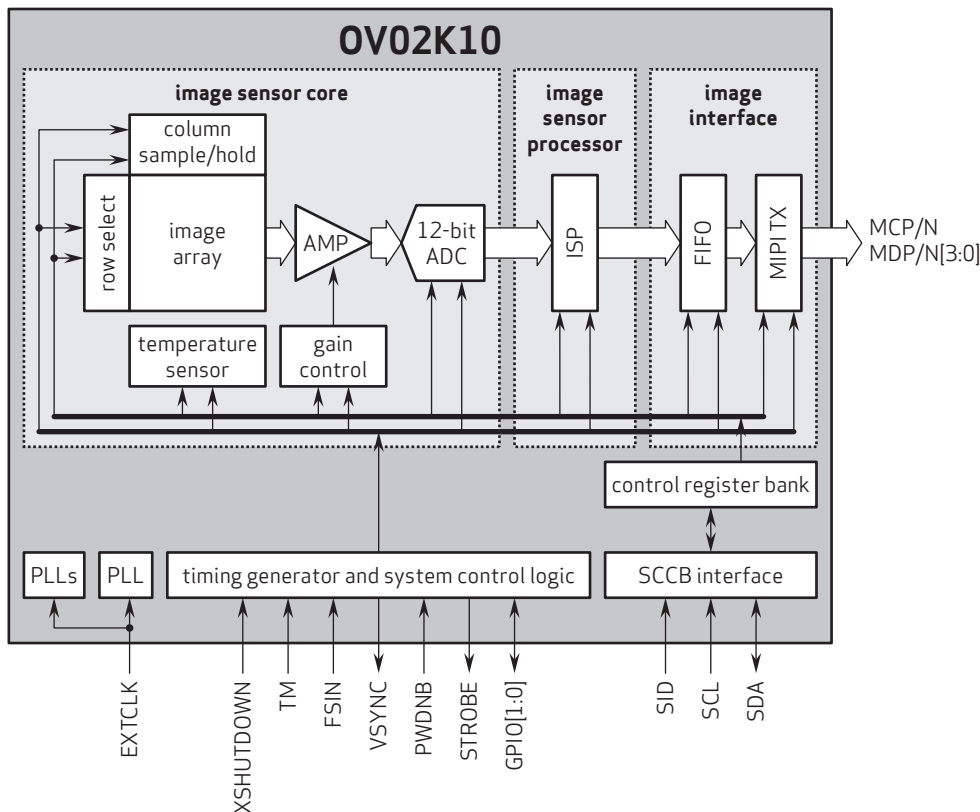

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and PureCel are registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision