


OV10650^{HDR} product brief

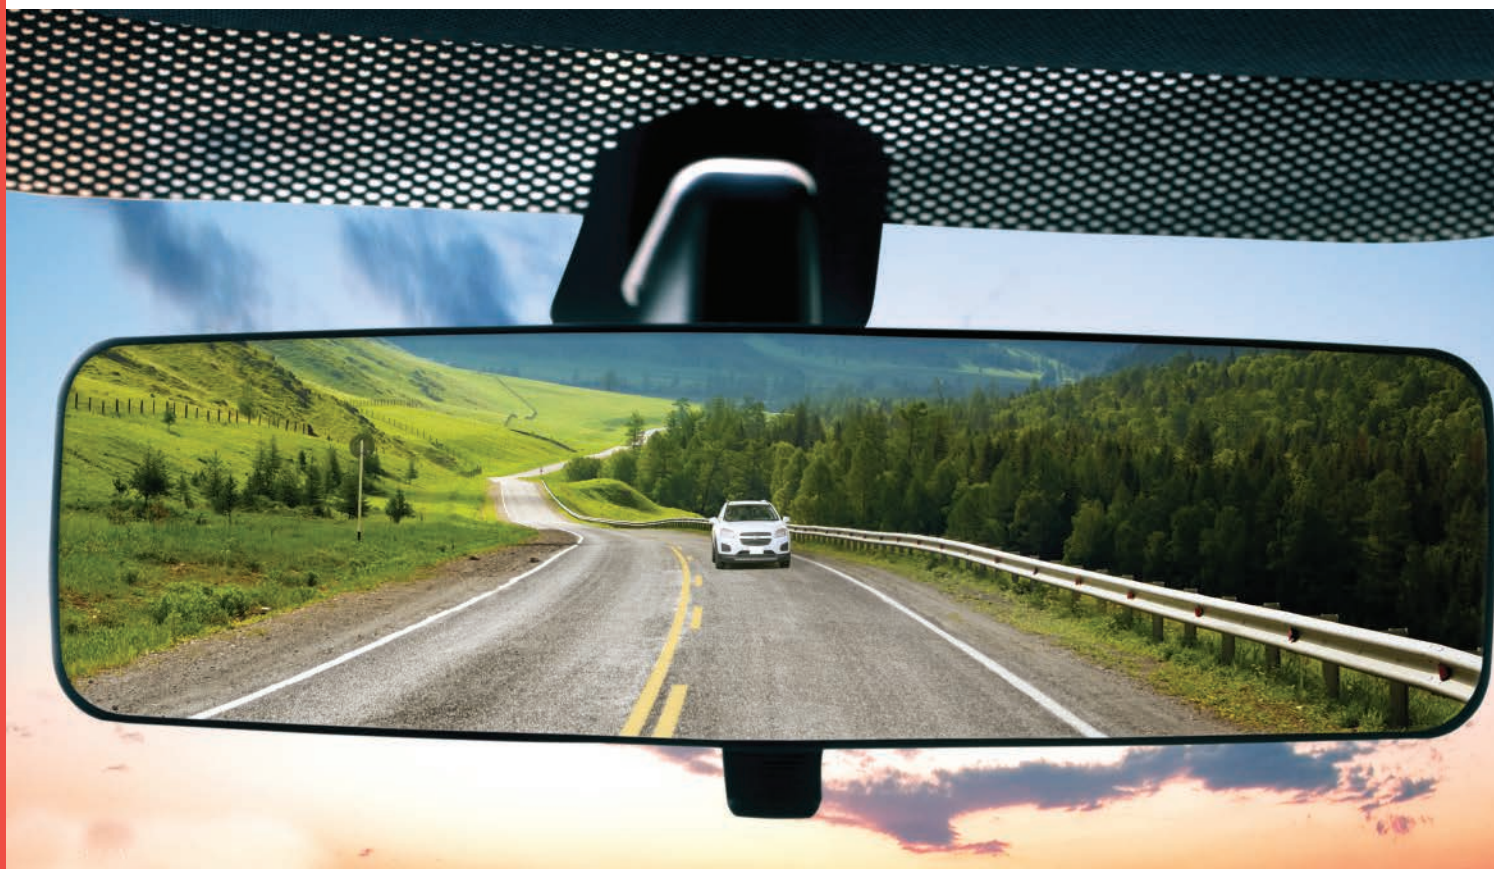

available in
a lead-free
package

High-Performance Automotive Image Sensor with 2:1 Aspect Ratio and 120 dB Dynamic Range

OmniVision's OV10650 is the industry's first 1.7-megapixel automotive image sensor with a 2:1 aspect ratio and 120 dB of dynamic range. The OV10650 can be paired with OmniVision's OV491 and OV495 image signal processing companion chips to deliver exceptional image quality.

Built on OmniVision's 4.2 μm OmniBSI™ split-pixel technology, the OV10650 captures high-quality color video in 1820 x 940 resolution at up to 60 frames per second (fps), while providing excellent high dynamic range and best-in-class low-light performance.

The sensor is available in an AEC-Q100 Grade 2 qualified chip-scale package (a-CSP™), and contains advanced ASIL safety mechanisms.

Find out more at www.ovt.com.



Applications

- Automotive
 - 360° Surround View System
 - Rear View Camera
 - Lane Departure Warning/Lane Keep Assist
 - Blind Spot Detection
- Night Vision
- Pedestrian Detection
- Traffic Sign Recognition
- Camera Monitoring System
- Autonomous Driving

Product Features

- support for image size:
 - 1824 x 940
 - VGA
 - QVGA, and any cropped size
- OmniHDR*-S technology
- high sensitivity
- safety features
- low power consumption
- image sensor processor functions:
 - lens correction
 - defective pixel cancellation
 - HDR combination and tone mapping
 - automatic black level correction
- supported output formats: RAW
- horizontal and vertical sub-sampling
- serial camera control bus (SCCB) for register programming
- high speed serial data transfer with MIPI CSI-2, parallel 12-bit DVP output
- external frame synchronization capability
- embedded temperature sensor
- one time programmable (OTP) memory

OV10650




Ordering Information

- **OV10650-E85Y-1D** (color, lead-free) 85-pin a-CSP™, with DAR coating, rev 1D, packed in tray
- **OV10650-E85Y-LD** (color, lead-free) 85-pin a-CSP™, with DAR coating, rev 1D, packed in tray with protective film (tab top left)
- **OV10650-E85Y-OD** (color, lead-free) 85-pin a-CSP™, with DAR coating, rev 1D, packed in tape& reel with protective film (tab top left)
- **OV10650-E85Y-MD** (color, lead-free) 85-pin a-CSP™, with DAR coating, rev 1D, packed in tray with protective film (tab top right)
- **OV10650-E85Y-ND** (color, lead-free) 85-pin a-CSP™, with DAR coating, rev 1D, packed in tape& reel with protective film (tab top right)

Technical Specifications

- **active array size:** 1824 x 940
- **maximum image transfer rate:**
 - full resolution: 60 fps
- **power supply:**
 - analog: 3.14 - 3.47V
 - digital: 1.425 - 1.575V
 - DVDD: 1.7 - 1.9V
 - AVDD: 1.7 - 1.9V
- **power requirements:**
 - active: 450 mW
 - standby: 100 µW
- **temperature range:**
 - operating: -40°C to +105°C sensor ambient temperature and -40°C to +125°C junction temperature
- **output interfaces:** 12-bit DVP, MIPI CSI-2
- **lens size:** 1/2.09°
- **lens chief ray angle:** 19°
- **scan mode:** progressive
- **output formats:**
 - 20-bit combined RAW
 - 12-bit compressed combined RAW
 - separated 12-bit RAW
 - 2x12-bit compressed RAW
 - 16-bit log domain combined RAW
 - 3x12-bit uncompressed RAW
- **shutter:** rolling shutter
- **pixel size:** 4.2 µm x 4.2 µm
- **image area:** 7711.2 µm x 3998.4 µm

Functional Block Diagram

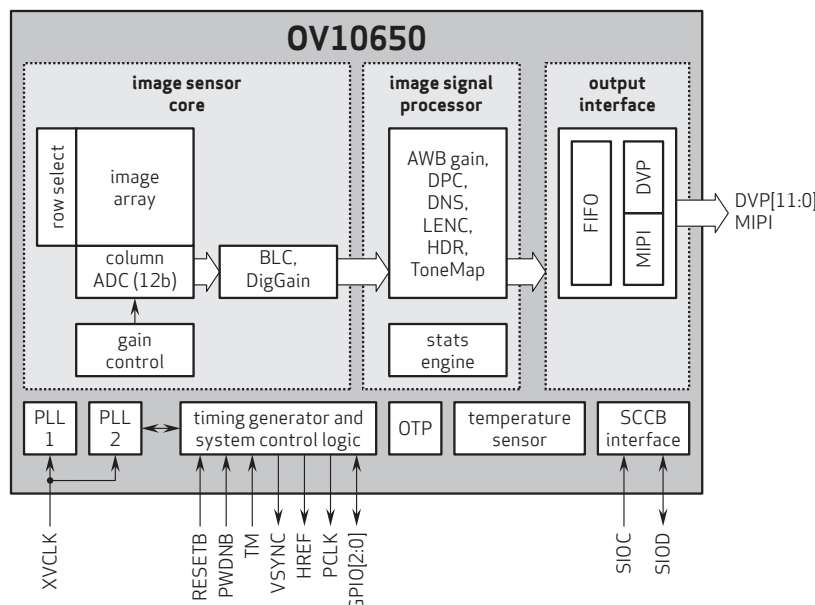

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniHDR are registered trademarks of OmniVision Technologies, Inc. OmniBSI and a-CSP are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision