

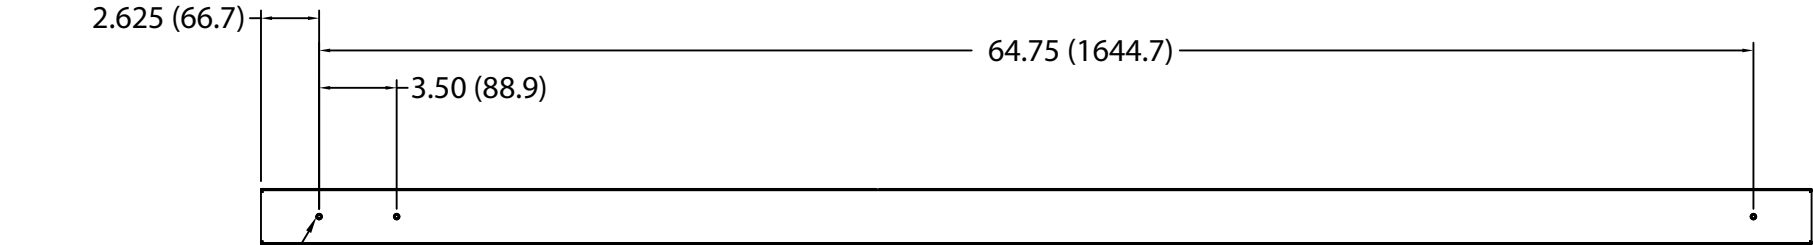



DETAIL A
(SCALE 4X)


PANDUIT P/N	WEIGHT
QL1A1M2BM24C1	25 lb (11.3 kg)



TOOLLESS MOUNTING BUTTON 2X

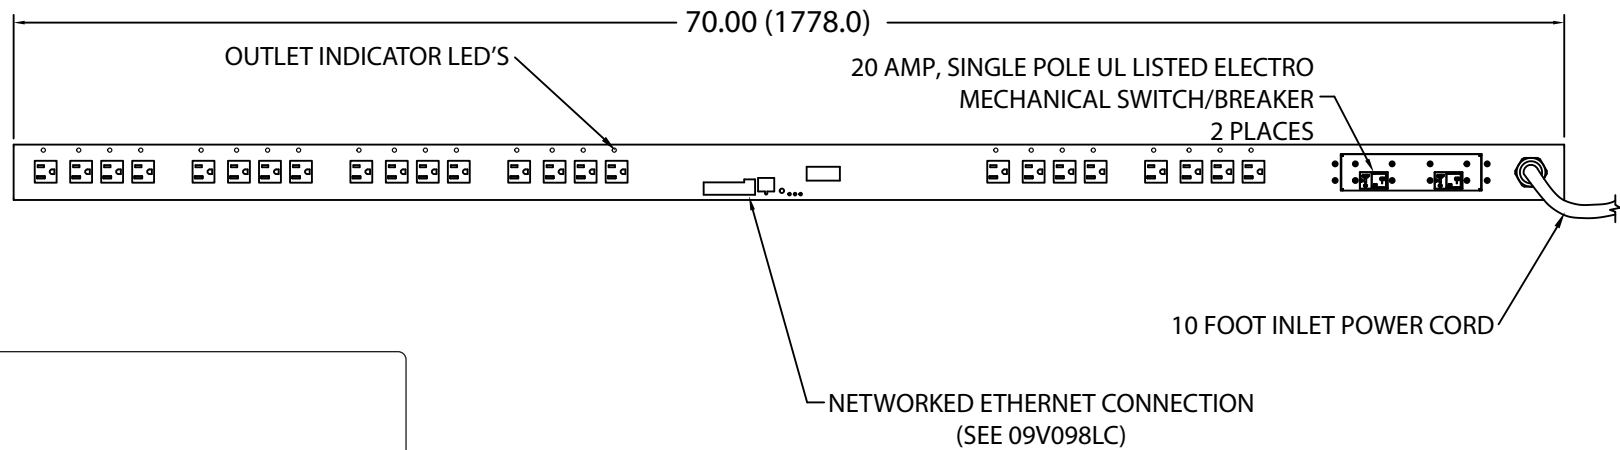

PLUG
30 AMP, 125V
TWIST-LOCK
NEMA L5-30P



TWENTY-FOUR (24)
RECEPTACLES
15 AMP, 125V
STRAIGHT BLADE
NEMA 5-15R

								TITLE VERTICAL, (24) 5-15R SWITCHED WITH PER OUTLET POWER & ENVIRONMENTAL MONITORED POWER OUTLET UNIT CUSTOMER DRAWING					
								ITEM REVISION NAME 09V098OK/01.PRT					
								DATASET FILE NAME 09V098OK_DC/01A.PRT					
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:			MATERIAL:		
								INCHES X.X +/- 0.03 X.XX +/- 0.018 X.XXX +/- 0.007	METRIC - MILLIMETER X.X +/- 0.8 X.X +/- 0.46 X.XX +/- 0.18	ANGLE +/- 1°			
01B	4-10-13	MRWA	KRKE		A. UPDATED BREAKER INFORMATION	B. UPDATED VOLTAGE RATING ON PLUG	09V098OK	THIRD ANGLE PROJECTION					
00A	7-19-12	PIP	MRWA		RELEASED TO PRODUCTION		09V098OK				DRAWING NUMBER: 09V098OK		
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN	DRAWN BY PIP	DATE 7-19-12	CHK	SCALE NONE	SHT 1 OF 1	SIZE B