


NOTES:
1. IDENTIFICATION: VERTICAL, (12) L6-20R
208V / 30A / THREE-PHASE DELTA POU

<u>PART NO.</u>	<u>COLOR</u>
VB0B1N3BN12J1	BLACK


2. ACCESSORY COMPONENTS:

- (4) #10-32 x 1/2" MOUNTING SCREWS
- (4) #12-24 x 1/2" MOUNTING SCREWS
- (2) #10-32 LOCKING COLLAR SCREWS
- (2) L-BRACKETS

- TOOLLESS MOUNTING
BUTTON 2X

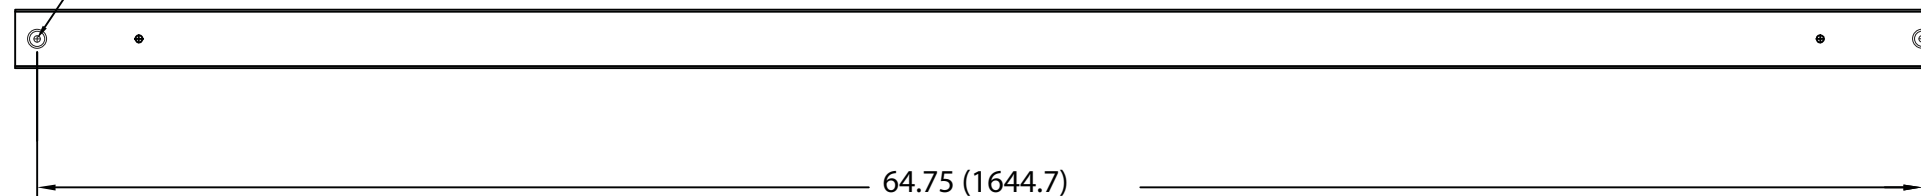

— 10 FOOT INLET POWER CORD

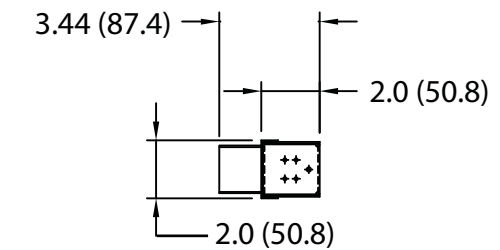

01A	8-7-12	PIP	MRWA	B. UPDATED NOTE #4 & 7. C. ADDED NOTE #8.	09V098EU				
00B	1-31-11	MAV	KRKE	A. ADDED MAXIMUM AVAILABLE POWER	09V098EU				
00A	10-15-10	MAV	KRKE	RELEASED TO PRODUCTION	09V098EU				
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH	

MODEL FILENAME		09V098EU/01.PRT	
CAD FILENAME/LAYERS		09V098EU_DC/01A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
VERTICAL, (12) L6-20R POWER OUTLET UNIT CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES X.X +/- 0.03 X.XX +/- 0.015 X.XXX +/- 0.005		[METRIC - MILLIMETER] X. +/- 0.8 X.X +/- 0.4 X.XX +/- 0.13	
		ANGLE +/- 1°	
ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION			
DRAWN BY MAV		SCALE NONE	
DATE 10-15-10		DRAWING NO. 09V098EU	
CHK'D KRKE		DWG B	