



NOTES:
1. IDENTIFICATION: VERTICAL, MIXED (24) C-13 & (6)C-19, METERED
208V / 30A / THREE-PHASE DELTA POU

<u>PART NO.</u>	<u>COLOR</u>
VB1B1N3BN30P1	BLACK


- TOOLLESS MOUNTING
BUTTON 2X

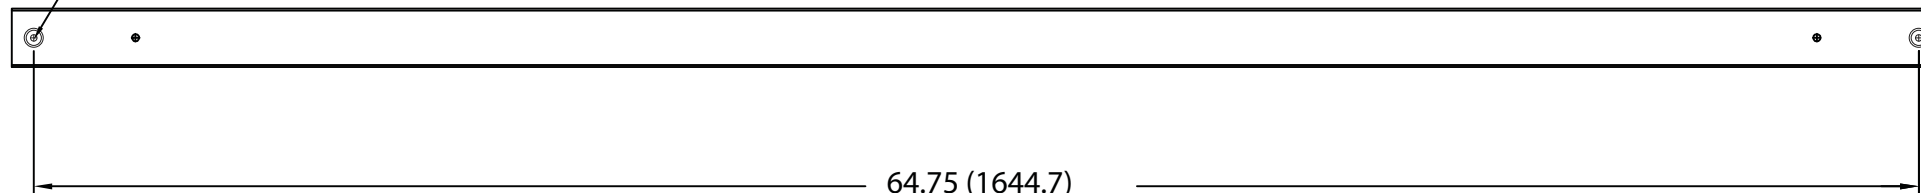


TOOLLESS MOUNTING BUTTON LOCATION

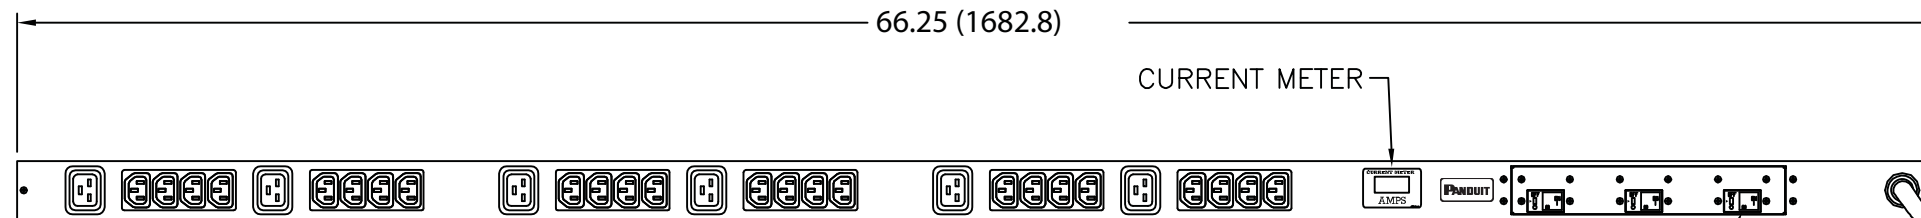


20 AMP, 2 POLE UL LISTED ELECTRO
MECHANICAL SWITCH/BREAKER
3 PLACES

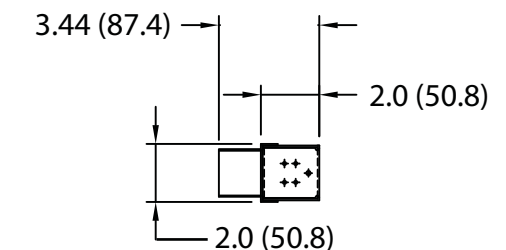


— 10 FOOT INLET POWER CORD



PLUG
30 AMP, 250V x 3~ DELTA
TWIST LOCK
NEMA L15-30P



TWENTY-FOUR (24)
RECEPTACLES
15 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13



SIX (6)
RECEPTACLES
20 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

01A	8-9-12	PIP	MRWA	B. UPDATED NOTE #5 & 8. C. ADDED NOTE #9.	09V098FA					
00B	1-31-11	MAV	KRKE	A. ADDED MAXIMUM AVAILABLE POWER	09V098FA					
00A	10-15-10	MAV	KRKE	RELEASED TO PRODUCTION	09V098FA					
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH		

MODEL FILENAME		09V098FA/01.PRT	
CAD FILENAME/LAYERS		09V098FA_DC/01A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
VERTICAL, MIXED (24) C-13 & (6) C-19, METERED POWER OUTLET UNIT CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES X.X +/- 0.03 X.XX +/- 0.015 X.XXX +/- 0.005	[METRIC - MILLIMETER] X. +/- 0.8 X.X +/- 0.4 X.XX +/- 0.13	ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
DRAWN BY MAV		SCALE NONE	
DATE 10-15-10		DRAWING NO. 09V098FA	
CHK'D KRKE		DWG B SIZE	