
PRODUCTS

Silencer MkIII 750W




Silencer Mk III 750W

Home > Power Supplies > High-Peformance > Silencer Mk III 750W

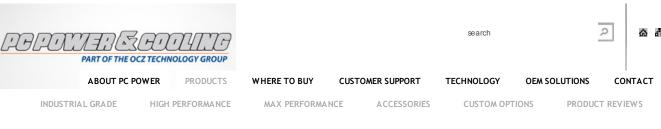

Power Supply Selector	
Power Usage Table	
Custom Options	
Power Supply	
Terminology	
Dimensions	

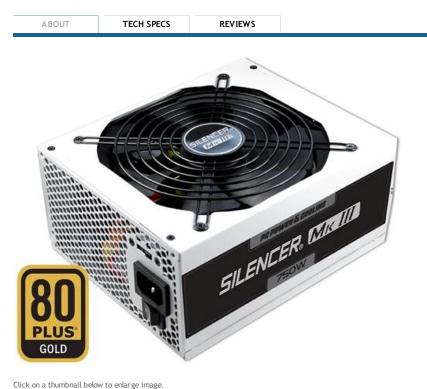

Mfr. PN: PPCMK3S750

Mechanical Drawing Manual Dimensions



SHOP

9

Silencer Mk III 750W

Offering industrial-grade performance and stability for demanding computing environments, the Silencer Mk III 750W provides ultimate efficiency, stability, and ultra-quiet operation with a modular cable design. Engineered with only premium components, including Japanese 105°C capacitors and heavy-duty protection circuitries, the Mk III 750W maintains continuous output at 50°C and efficiently delivers power through a single +12V rail, and sporting the Dual Thermal Control System, a sophisticated operation that allows the PSU to switch between normal and silent mode seamlessly. Backed with PC Power's complete confidence in reliability with an industry-leading 7 year warranty, this PSU offers ultimate peace of mind.

750W Continuous @ 50C SLI and CrossFire Ready 80-Plus Gold Certified (90% Efficiency); .98 Active PFC 140mm double ball-bearing fan +12VDC @62A (Powerful Single Rail) Premium Components with 100% Japanese 105°C Capacitors Modular Cabling Design with High-Conductivity, Low-Resistance Metallic Connectors Dual Thermal Control System: Normal and Silent Operation 7-Year Warranty and Tech Support

Home | Products | Technology | Refurbished | Support | About PC Power & Cooling | Site Map | Contact Us PC Power & Cooling, An OCZ Technology Group Company · 5995 Avenida Encinas, Carlsbad, CA 92008 USA 1-760-931-5700 · 1-800-722-6555 · Fax 1-760-931-6988

© 1997-2013 PC Power & Cooling. Specifications subject to change without notice. Legal. Terms of Use. Privacy Policy.

Silencer Mk III 750W

PEPPE		suit					search	
	ABOUT PC F	POWER	PRODUCTS	WHERE TO BUY	CUST	OMER SUPPORT	TECHNOLOGY	
INDUSTR	RIAL GRADE	HIGH	PERFORMANCE	MAX PERFORMA	NCE	ACCESSORIES	CUSTOM OPT	10

CUSTOM OPTIONS

OEM SOLUTIONS PRODUCT REVIEWS

PRODUCTS

Power Supplies High-Peformance Silencer Mk III 850W Silencer Mk III 750W Silencer Mk III 1200W Silencer Mk III 600W Silencer Mk III 500W

Silencer Mk III 400W

Silencer Mk II 950W

Silencer Mk II 750W

Silencer Mk II 650W

Silencer Mk II 500W

Silencer 610 EPS12V Maximum-Performance

Silencer 910W Silencer 750 Quad (Black)

End of Life

Recertified Accessories

Custom Options

RELATED LINKS

Custom Options

Power Supply

Terminology

Dimensions

Power Supply Selector Power Usage Table

Silencer 760W

Silencer Mk III 750W

Home > Power Supplies > High-Peformance > Silencer Mk III 750W

AC Input

Operating Range:	

Frequency: Current: Efficiency: EM I:

DC Output

Output:

Regulation:

Ripple: Hold Time: PG Delay:

Safety

Over Voltage Protection: Over Current Protection: Agency Approval:

Environmental

Temperature: Humidity: Fan Type:

Miscellaneous

Compatibility: M/B Connectors:

Video Connectors: Drive Connectors:

MTBF: Dimensions/Harness: Power Cord: Warranty:

115-240 VAC 0.98 power factor 50/60Hz 10A 90% typical load (80+ Gold) FCC Class-B, CE, BSM1

+3.3V@24A,+5V@24A,+12V@62A -12V@0.5A,+5VSB@3.0A 3% (+3.3V, +5V, +12V) 5% (-12V, +5Vsb) 1% (p-p) 30ms minimum

100-500ms

+3.3V, +5V, +12V 135% OPP cTÜVus, CB, TÜV, CCC, C-tick, GOST, China RoHS, WEE, RoHS

0-50°C 10-90% 140mm ball bearing, thermally controlled

ATX12V & EPS12V 1 x 20+4-pin ATX 2 x 4+4-pin CPU 4 x 6+2-Pin PCI-E 4 x Peripheral 12 x 5-pin SATA 1 x FDD Adapter 100,000 Hours 150mm (W) x 86mm (H) x 180mm (L)

US, EU, UK, CN, AU, JP, KCC 7-Years

2

CONTACT

SHOP

Mechanical Drawing Manual Dimensions



Home | Products | Technology | Refurbished | Support | About PC Power & Cooling | Site Map | Contact Us PC Power & Cooling, An OCZ Technology Group Company · 5995 Avenida Encinas, Carlsbad, CA 92008 USA