

Power supply unit - STEP-PS-100-240AC/24DC/1.5



2938947

<https://www.phoenixcontact.com/us/products/2938947>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

DIN rail power supply unit 24 V DC/1.5 A, primary-switched mode, low-profile design



Commercial Data

Item number	2938947
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C14
Product Key	CMPS13
Catalog Page	Page 509 (IF-2007)
GTIN	4017918892401
Weight per Piece (including packing)	271 g
Weight per Piece (excluding packing)	200 g
Customs tariff number	85044094
Country of origin	CN

Technical Data

Input data

AC operation

Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	85 V AC ... 264 V AC
Input voltage range AC	85 V AC ... 264 V AC
Inrush current	< 25 A (typical)
Inrush current integral (I^2t)	0.8 A ² s
AC frequency range	45 Hz ... 65 Hz
Frequency range DC	0 Hz
Mains buffering time	> 20 ms (120 V AC) > 100 ms (230 V AC)
Current consumption	0.8 A (120 V AC) 0.4 A (230 V AC)
Nominal power consumption	36 W
Typical response time	< 1 s
Input fuse	1.25 A (Normal blow, internal)
Recommended breaker for input protection	16 A (Characteristic C)

Output data

Efficiency	> 80 %
Nominal output voltage	24 V DC $\pm$ 1 %
Output current $I_{\max}$	approx. 4.5 A
Nominal output current (I_N)	1.5 A (up to 55 °C)
Feedback voltage resistance	35 V DC
Control deviation	< 1 % (change in load, static 10 % ... 90 %) < 3 % (change in load, dynamic 10 % ... 90 %) < 0.1 % (change in input voltage $\pm$ 10 %)
Residual ripple	< 40 mV _{PP}
Output power	36 W
Peak switching voltages nominal load	< 50 mV _{PP} (20 MHz)
Maximum no-load power dissipation	< 2 W
Power loss nominal load max.	< 8 W
Connection in parallel	yes, for redundancy and increased capacity
Connection in series	No

Connection data

Input

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²

Power supply unit - STEP-PS-100-240AC/24DC/1.5



2938947

<https://www.phoenixcontact.com/us/products/2938947>

Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	6.5 mm
Screw thread	M3

Output

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	6.5 mm
Screw thread	M3

LED signaling

Types of signaling	LED
Signal output: POWER	
Status display	Green LED
Signal output: OVERLOAD	
Status display	LED red

Electrical properties

Insulation voltage input/output	3 kV (routine test)
	4 kV (type test)

Product properties

Product type	Power supply
MTBF (IEC 61709, SN 29500)	> 500000 h

Insulation characteristics

Overvoltage category	III
----------------------	-----

Dimensions

Width	71 mm
Height	90 mm
Depth	55 mm

Mounting

Assembly instructions	alignable: 0 mm horizontally, 30 mm vertically
Mounting position	horizontal DIN rail NS 35, EN 60715

Power supply unit - STEP-PS-100-240AC/24DC/1.5



2938947

<https://www.phoenixcontact.com/us/products/2938947>

Material specifications

Color	green
Type of housing	Plastic PPE+PS GF 10 FR, color green

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	95 % (at 25 °C, non-condensing)

Standards and regulations

Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
	EN 61558-2-17
	EN 50178 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
Standard - Safety of transformers	EN 61558-2-17
Standards/specifications	EN 60950
Standards/specifications	VDE 805
Standards/specifications	UL/C-UL recognized UL 60950-1
Standards/specifications	EN 61558-2-17
Standards/specifications	DIN VDE 0106-101
Standards/specifications	UL/C-UL listed UL 508
Standards/specifications	EN 50178
Standards/specifications	EN 50178
Standards/specifications	EN 60950
Standards/specifications	VDE 0160
Standards/specifications	in acc. with EN 61000-3-2

Approval data

UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950-1

EMC data

Electromagnetic compatibility	Conformance with EMC directive 89/336/EC
-------------------------------	--

Power supply unit - STEP-PS-100-240AC/24DC/1.5




2938947

<https://www.phoenixcontact.com/us/products/2938947>

Drawings

Block diagram

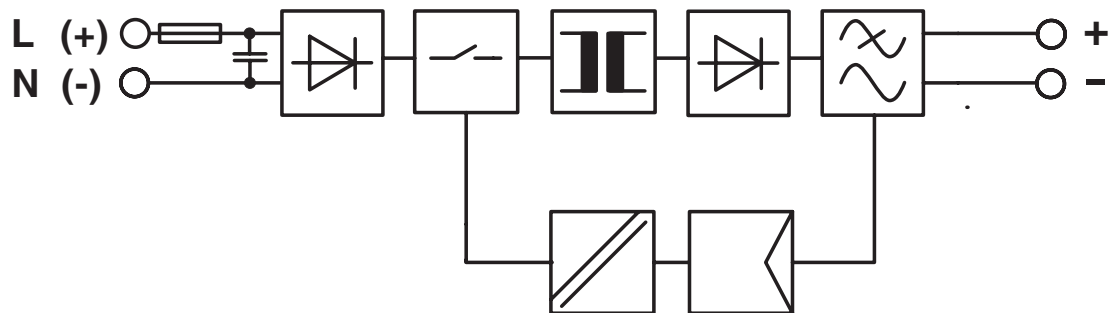

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com