

VNR65 Series

65 Watts

Single Output Switching Power Supply

Features:

- * Industry Standard 2 x 4" Open Frame Package
- * UL Class I / UL Class II Approvals (No Safety Ground Required)
- * New Component Technologies for Improved Reliability and costs
- * High Efficiency Operation - Up to 84%
- * Universal AC Input (47-63 Hz)
- * 100,000 hours MTBF (25°C Full Load Operation)
- * International Safety Approvals & CE Mark
- * Class B Emissions
- * 3 Year Warranty



Input Specifications:

Input Range	Universal VAC (90-264 VAC) & 120-370 VDC
Input Frequency	47-63 Hz or DC
Inrush Current	25A @ 115VAC / 50A @ 230VAC max (cold start)
Input Current	1700ma Maximum
Input Reflected Ripple	FCC 68 part 15 Class B
Efficiency	72-84% Typical (depending on output model)
Input Protection	Single Fused (4 Amp / 250 V)
Hold-up Time	Half Cycle Minimum @ 120 VAC and 80% load
Leakage Current	< 750 μ A maximum @ 264 VAC
Harmonics	EN61000-3-2 Class D

Output Specifications:

Adjustment Range	Fixed at Factory
Minimum Load	None
Regulation	$\pm 3\%$ maximum (line, load & temperature)
Ripple / Noise	$\pm 1\%$ pk-pk max (20MHz)
Transient Response	+/- 5% Deviation / < 1msec recovery
Set-Point Accuracy	$\pm 2\%$
Short Circuit Protection	Continuous
Over Load Protection	125-150%, automatic recovery
Over Voltage Protection	120-150%, latched shutdown

Emissions Standards

FCC Part 15J, Part 2	Within Class B Limits
EN5022 / CISPR22	Within Class B Limits

Electromagnetic Compatibility:

Electrostatic Discharge	EN61000-4-2, ± 4 KV Contact / ± 8 KV Air Discharge
Radiated Susceptibility	EN61000-4-3, 26-1000MHz, 10V/M, 80% AM
EFT / Bursts	EN61000-4-4, ± 2 KV
Surges	EN61000-4-5, ± 2 KV Line-Earth, ± 1 KV Line-Line
Conducted Immunity	EN61000-4-6, 0.15 - 800MHz, 10V, 80% AM
Voltage Dips	EN61000-4-11, 95% Dip & 10ms, 30% Dip & 500ms
Voltage Interruptions	EN61000-4-11, 95% Reduction, 5s
Radiated Emissions	FCC 68 part 15 Class B
Conducted Emissions	FCC 68 part 15 Class B
Harmonic Current	EN61000-3-2 Class D
Fluctuations & Flicker	EN61000-3-3

Environmental Specifications:

Operating Temp	0 ~ +50°C (De-Rate 2.5%/1°C Rise To +70°C)
Storage Temp	-20 ~ +85°C
Cooling	10 cfm required for full load operation or derate 25%
Temp Co-Efficient	0.05% per degrees celsius
Humidity	5 to 95% RH Non-Condensing
Vibration	3 Axes 1 Oct/min, 5 min at 4 Res. 0.75G Pk, 5-500Hz
Shock	20G Peak Acceleration
Reliability	> 100k hours MTBF (Full Load and 25°C Operation)

International Safety Approvals

Standards	UL/cUL 60950-1 - File # E158470 CB Report IEC 60950-1, File # E158470-A3-CB-1 CE Mark (LVD)
-----------	---

VNR65 Series



Output Table:

Model Number	Max Power	V1	Io Min	Io Max	Efficiency
VNR65-3.3V	33 Watts	3.3 VDC	n/a	10 Amps	72% (typical)
VNR65-5V	50 Watts	5.0 VDC	n/a	10 Amps	78% (typical)
VNR65-12V	65 Watts	12 VDC	n/a	5.5 Amps	81% (typical)
VNR65-24V	65 Watts	24 VDC	n/a	2.7 Amps	83% (typical)
VNR65-48V	65 Watts	48 VDC	n/a	1.35 Amps	84% (typical)

Mechanical Specifications:

Construction: Open Frame

Weight: 0.385 lb / 0.174 kg.

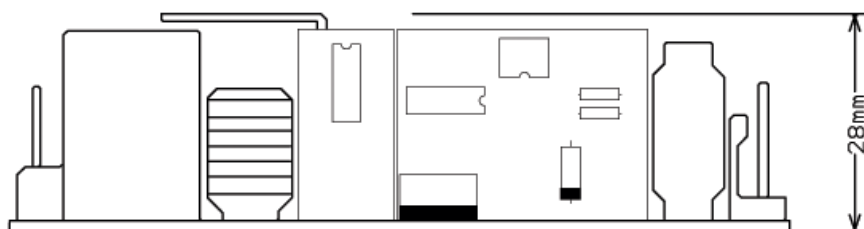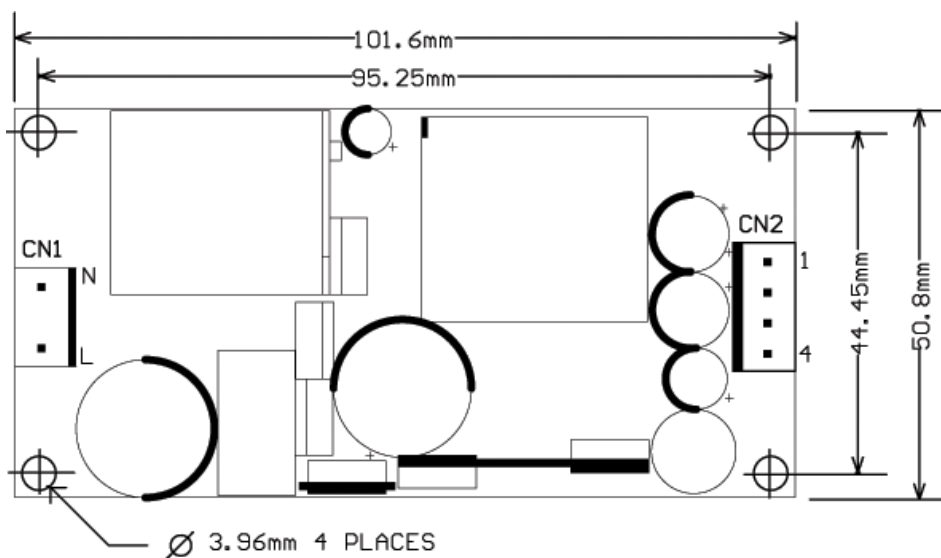

Output Pin Assignmnets:

CN2-1	V1
CN2-2	V1
CN2-3	RETURN
CN2-4	RETURN

Mating Connectors:

CN1 (AC Input) Mating Connector:
Molex 09-50-2030 (3-1) (2139 series)

CN2 (DC Output) Mating Connector:
Molex 09-50-2040 (2139 series)

PowDec
Technologies, Inc.

PowDec Technologies (Taiwan) Inc.
No. 9, Alley 9, Lane 392, Fu Teh
1st Road Hsi Chih, Taipei Hsien, Taiwan, 22150
Tel: (02)2694-2760
Fax: (02)2694-2753
E-mail: powdec@ms3.hinet.net
http://www.powdec.com.tw

PowDec Technologies (USA) Inc.
7013 Realm Drive, Suite E
San Jose, CA 95119 U.S.A.
Tel: (408) 362-9388
E-mail: tedkang@powdec.com
http://www.powdec.com