

Panel Specifications

Electrical:

1000 Lux: 0.905mA at 2.1V (1.90mW)¹
 200 Lux: 0.181mA at 1.6V (0.289mW)
 Max Voc: 3.7V (Direct Sunlight)
 Average Isc: 156mA (Direct Sunlight)¹


Mechanical:

f/b Laminate: 3 mil PET / 3 mil PET
3/16 in (4.76 mm) Copper Foil Busbar
Thickness: 0.2–0.3mm
Appr. Weight: 1.70 grams
Operating Temperature: –25C to 65C²
Bend Radius: 1 inch fixed, 3 inch repetitive³
UV and Moisture Protection: Limited⁴

REVISIONS

DRAWING NO.	LL200-2.4-75
-------------	--------------

REV	DESCRIPTION	REVIEW	DATE
1	2 Cell 73 x 94 mm Tandem Low Light Module	DS	12/2/2020

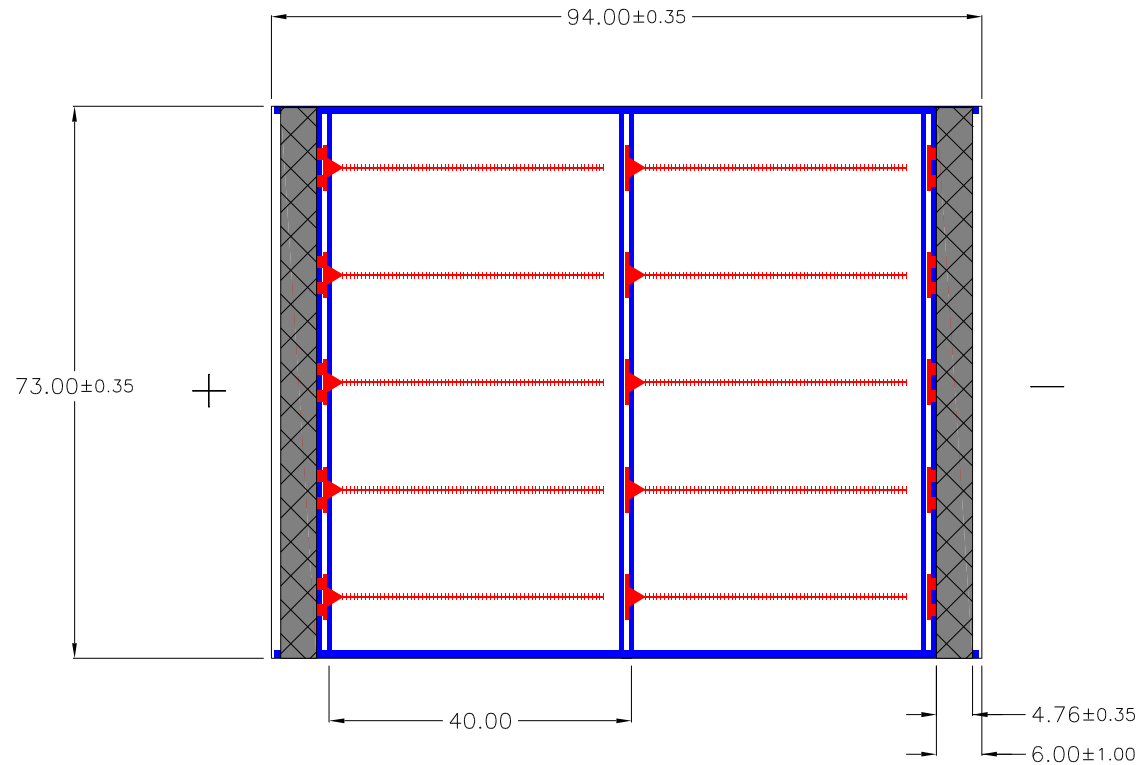

1. Tested under a cool white LED spectrum. Extended exposure to direct sunlight can reduce panel performance.
2. High temperature laminates available for up to 85C continuous, 100C peak (4 hours daily).
3. Contact engineering support for tighter flexing requirements
4. Tolerant to intermittent exposure to UV, moisture and weather. Full UV and weatherproofing options are available

This document contains information which is the property of PowerFilm Inc. It is not to be duplicated used, or disclosed in whole or in part for any purpose without prior written permission of PowerFilm Inc. All Dimensions +/- 1.2 mm unless specified.

PowerFilm Inc.

1287 XE Place
Ames, IA 50014
515-292-7606
515-292-1922(fax)

TITLE	
1	1. TITLE
2	2. AUTHOR
3	3. SUBJECT
4	4. DATE
5	5. PLACE
6	6. PRICE
7	7. PUBLISHER
8	8. DISTRIBUTOR
9	9. REVIEWER
10	10. COMMENTS

2 Cell 73 x 94 mm Tandem Low Light Module

SCALE 1:1

DATE: 12/2/2020

D	REF.
	DRAWING NO.

LL200-2.4-75

UNITS: mm