



Specification

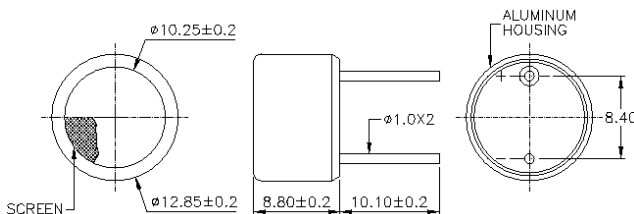
400ST120	Transmitter
400SR120	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ST120 2.0KHz
	400SR120 2.0KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	115dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/μbar	-67dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	85° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:

1	400ST/R120	Aluminum Housing
2	400ST/R12B	Black Al. Housing


Dimensions: dimensions are in mm



Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

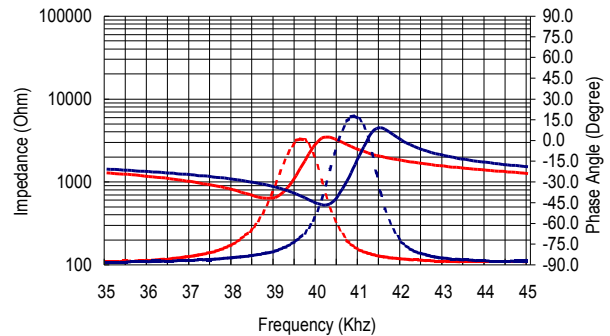400SR120 Impedance
400SR120 Phase
400ST120 Impedance
400ST120 Phase




Sensitivity/Sound Pressure Level

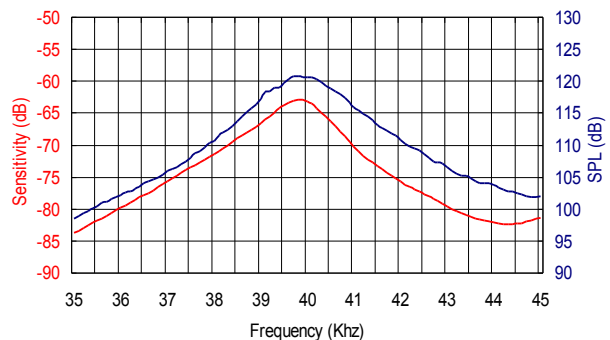Tested under 10Vrms @30cm











Beam Angle

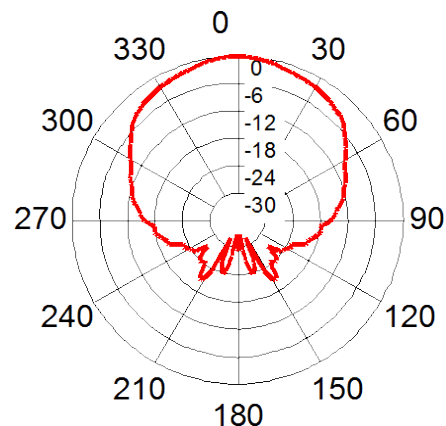Tested at 40.0KHz frequency



S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

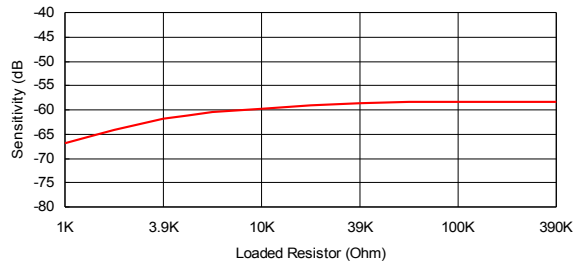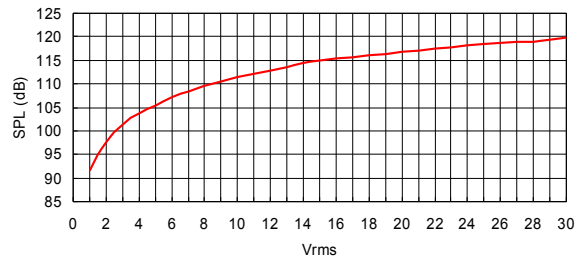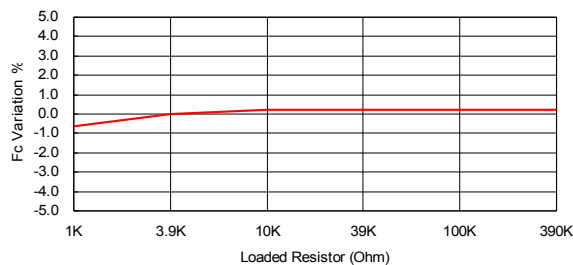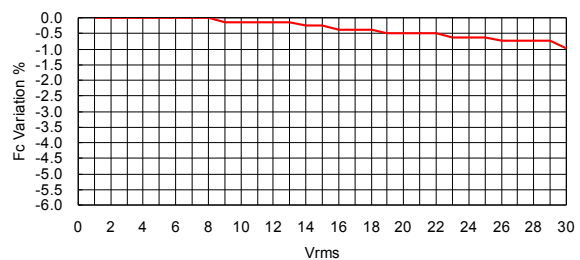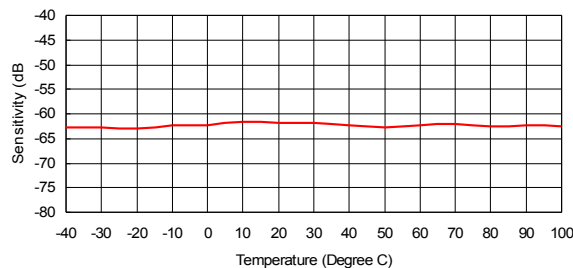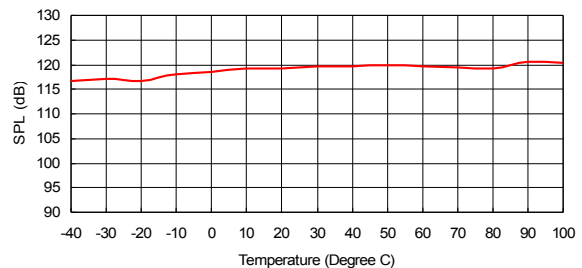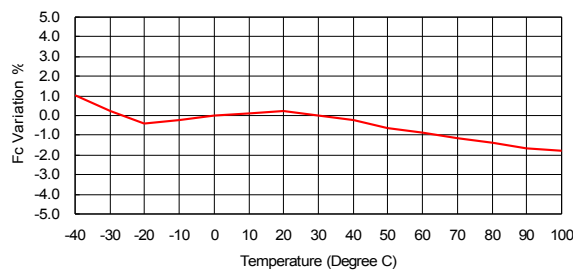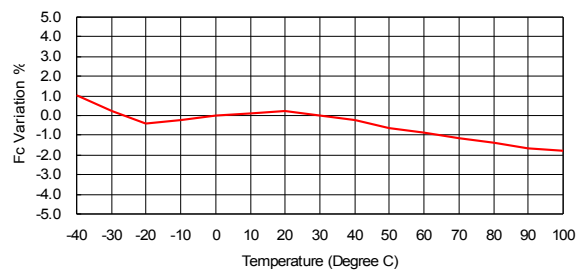[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

400SR120 Receiver**Sensitivity Variation vs. Loaded Resistor****400ST120 Transmitter****SPL Variation vs. Driving Voltage****Center Frequency Shift vs. Loaded Resistor****Center Frequency Shift vs. Driving Voltage****Sensitivity Variation vs. Temperature****SPL Variation vs. Temperature****Center Frequency Shift vs. Temperature****Center Frequency Shift vs. Temperature**

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105