

DESCRIPTION

The PUP121/PUP136 series of AC/DC switching power supplies are for 96-135 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an IEC320/C14, IEC320/C6 inlet to mate with interchangeable cord for world-wide use. All models meet EN55022, EN55024 and FCC class B emission limits and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.21w
- Meet efficiency level VI
- Meet energy star EPS2.0 /ErP lot 7
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.8 A (rms) for 115 VAC 0.9 A (rms) for 230 VAC
Touch current:	250 μ A max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	Set at 110-155% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +60 $^{\circ}$ C (See Derating)
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Operating humidity:	20% to 80% non-condensing
Storage humidity:	10% to 90% non-condensing
Derating:	Derate output power linearly from 100% at 40 $^{\circ}$ C to 50% at 60 $^{\circ}$ C

PUP121/PUP136 SERIES



SAFETY STANDARD APPROVALS



UL 60950 3 rd, CSA C22.2 NO. 60950 3 rd
File No. E190414



TÜV EN 60950-1

GENERAL SPECIFICATIONS


Hold-up time:	10 ms minimum at 115 VAC
Turn on delay time	3 s maximum at 100 VAC
Power factor:	0.9 typical at 115 VAC
Efficiency:	89% typical at full load
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	70 A @ 115 VAC or 140 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	1500 VAC from input to output
MTBF:	500,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332
Ingress Protection:	IP22 Compliant
EMC Performance	Class B conducted, Class B radiated Class B conducted, Class B radiated Class B conducted, Class B radiated Harmonic distortion, Class D
EN55022:	
FCC:	
VCCI:	
EN61000-3-2:	Line flicker
EN61000-3-3:	
EN55024	ESD, ± 8 KV air and ± 4 KV contact Radiated immunity, 3 V/m
EN61000-4-2:	Fast transient/burst, ± 1 KV
EN61000-4-3:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-4:	Conducted immunity, 3 Vrms
EN61000-4-5:	Magnetic field immunity, 1 A/m
EN61000-4-6:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms
EN61000-4-8:	
EN61000-4-11:	

OUTPUT VOLTAGE/CURRENT RATING CHART

Model ⁽¹⁾	Output						Average Active Efficiency (typical) @115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽¹⁾	Max. Output Power	
PUP121-12	12 V	0 A	8.00 A	±5%	350 mV	96 W	89 /89%
PUP121S-12	12 V	0 A	8.00 A	±5%	350 mV	96 W	89 /89%
PUP121-13-2	19 V	0 A	6.32 A	±5%	350 mV	120 W	91 /91%
PUP121S-13-2	19 V	0 A	6.32 A	±5%	350 mV	120 W	91 /91%
PUP121-14	24 V	0 A	5.00 A	±5%	350 mV	120 W	90 /90%
PUP121S-14	24 V	0 A	5.00 A	±5%	350 mV	120 W	90 /90%
PUP121-18	48 V	0 A	2.50 A	±5%	350 mV	120 W	91 /90%
PUP121S-18	48 V	0 A	2.50 A	±5%	350 mV	120 W	91 /90%
PUP121-19	54 V	0 A	2.22 A	±5%	350 mV	120 W	92 /92%
PUP121S-19	54 V	0 A	2.22 A	±5%	350 mV	120 W	92 /92%
PUP136-13-2	19 V	0 A	7.10 A	±5%	350 mv	135 W	91 /91%
PUP136S-13-2	19 V	0 A	7.10 A	±5%	350 mv	135 W	91 /91%

- NOTES:
- 1. PUP121/PUP136 models are equipped with IEC320/C14 inlet, and PUP121S/PUP136S models with IEC320/C6 inlet.
 - 2. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

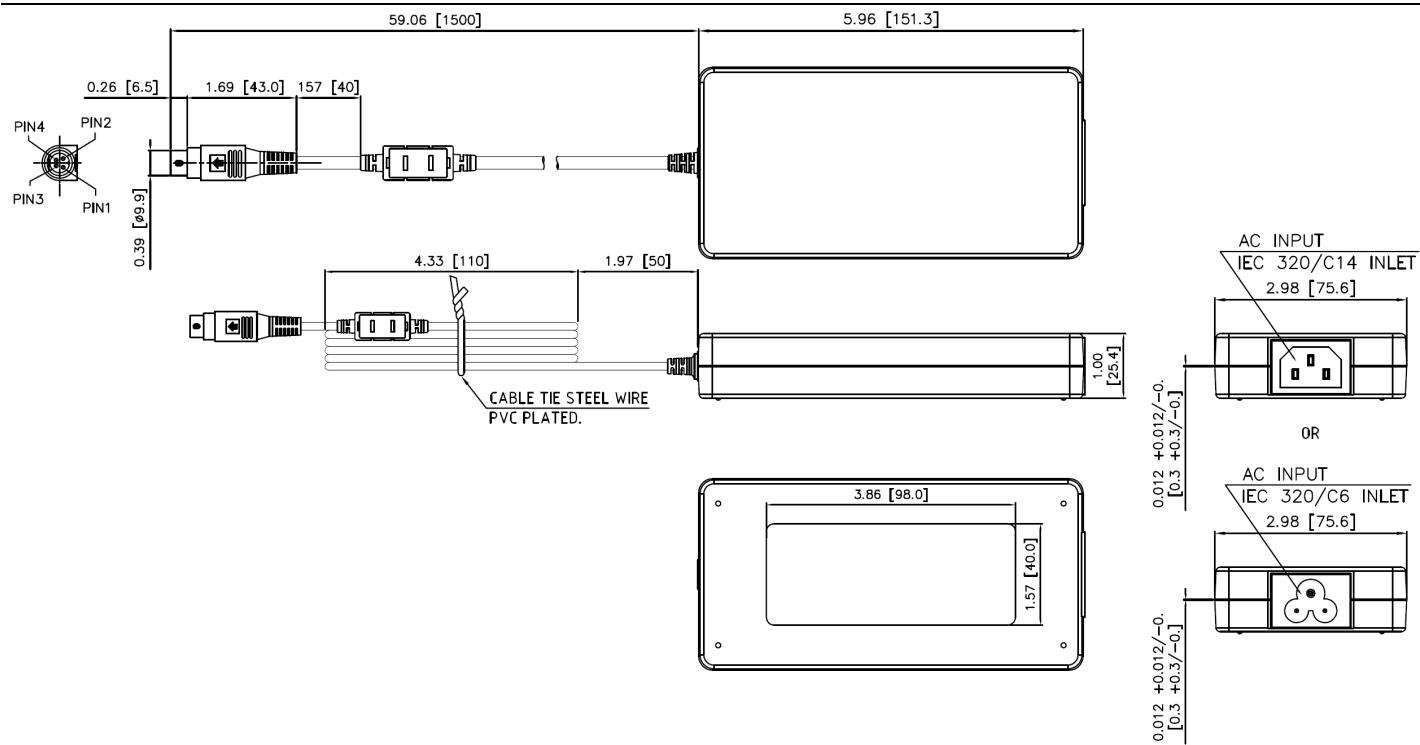

- NOTES:
- 1. Dimensions shown in inches [mm]
 - 2. Tolerance 0.02 [0.5] maximum
 - 3. Weight: 450 grams (0.99 lbs.) approx.
 - 4. **V1 return (-) is electrically connected to incoming Earth Ground through a 1M ohm resistor as standard.**

PIN CHART

PIN NO.	1	2	3	4	SHELL OF CONNECTOR
Polarity	+V1	+V1	V1 Return	V1 Return	V1 Return