

CE

RoHS

DESCRIPTION

The PUP90N3 series of AC/DC switching power supplies are for 90 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with IEC320/C14 or IEC320/C6 inlet to mate with interchangeable cord for world-wide use. All models meet EN55032, EN55024 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.15W
- Compliant with DoE level VI requirements .
- Meet energy star EPS2.0 /ErP EC No 278/2009 (lot 7) .
- Meet EU CoC EPS V5 Tier2 •
- Operating altitude up to 5000 meters •
- Overvoltage protection (latch) •
- Short circuit protection (auto-recovery)
- Overcurrent protection (auto-recovery)
- Over temperature protection (latch)
- High efficiency, $\geq 89\%$
- With PFC circuit
- 100% burn-in at full rated load
- . Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.0 A (rms) for 115 VAC
	0.5 A (rms) for 230 VAC
Earth Leakage current:	250 μA max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	Provided and set at 110-155% of its nominal output voltage
Overcurrent protection:	Protected to short circuit conditions
Temperature coefficient: Transient response:	$\pm 0.04\%$ /°C maximum Maximum excursion of 4% or better on all models, recovering to 1% of final

ENVIRONMENTAL SPECIFICATIONS

Operating temperature: Storage temperature: Operating humidity: Storage humidity: Temperature derating:

0°C to +40°C -20°℃ to +80°℃ 20% to 80% non-condensing 10% to 90% non-condensing Derate from 100% at +40°C linearly to 50% at +60°C

value within 500 us after a 25% step

load change



SAFETY STANDARD APPROVALS



PUP90N3 SERIES

UL 62368-1, CSA C22.2 No. 62368-1 File No. E190414

TÜV EN 62368-1

GENERAL SPECIFICATIONS

Power factor:	0.90 Typical at 115 VAC
Efficiency:	89% minimum at full load
Hold-up time:	10 ms minimum at 100 VAC
Line regulation:	±0.5% maximum at full load
Inrush current:	60 A @ 115 VAC or 120 A @ 230 VAC, at 25
	°C cold start
Withstand voltage:	4242 VDC from input to output
	2500 VDC from input to ground
MTBF:	200,000 hours at full load at 25 $^\circ\!\mathrm{C}$ ambient,
	calculated per SR332
EMC Performance	
EN55032:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ±8 KV air and ±4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ±1 KV
EN61000-4-5:	Surge, ±1 KV diff., ±2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500
	ms and >95% reduction for 10 ms

OUTPUT VOLTAGE/CURRENT RATING CHART


	Output				Average Active		
Model ⁽¹⁾	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽²⁾	Max. Power	Efficiency (typical) @ 115 / 230 Vac
PUP90N3-13-2	19 V	0 A	4.74 A	±5%	350 mV	90 W	89 /89%
PUP90N3S-13-2	19 V	0 A	4.74 A	±5%	350 mV	90 W	89 /89%
PUP90N3-14	24 V	0 A	3.75 A	±5%	350 mV	90 W	90 /90%
PUP90N3S-14	24 V	0 A	3.75 A	±5%	350 mV	90 W	90 /90%
PUP90N3-18	48 V	0 A	1.88 A	±5%	350 mV	90 W	91 /91%
PUP90N3S-18	48 V	0 A	1.88 A	±5%	350 mV	90 W	91 /91%
PUP90N3-19	54 V	0 A	1.67 A	±5%	350 mV	90 W	90 /90%
PUP90N3S-19	54 V	0 A	1.67 A	±5%	350 mV	90 W	90 /90%

NOTES:

1. PUP90N3 models are equipped with IEC320/C14 inlet, and PUP90N3S models with IEC320/C6 inlet.

Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 μF electrolytic capacitor in parallel with a 0.1 μF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

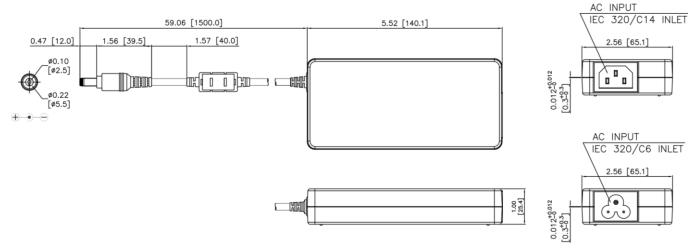

NOTES:

- 1. Dimensions shown in inches [mm]
- 2. Tolerance 0.02 [0.5] maximum
- 3. Weight: 360 grams (0.79 lbs.) approx.

4. Output return (-) is electrically connected to incoming Earth Ground through a 1M ohm resistor as standard.

PIN CHART

PIN NO.	CONNECTION		
Polarity	(+)(-)		