

DESCRIPTION

The PUP91 series of AC/DC switching power supplies are for 90 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with IEC320/C14, IEC320/C6 inlet to mate with interchangeable cord for world-wide use. All models meet, EN55022, EN55024 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.21w
- Meet efficiency level VI
- Meet energy star EPS2.0 /ErP lot 7
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short circuit protection (auto-recovery)
- Overcurrent protection (auto-recovery)
- Over temperature protection (latch)
- High efficiency, $\geq 89\%$
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.2 A (rms) for 115 VAC 0.6 A (rms) for 230 VAC
Touch current:	250 μ A max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	Provided and set at 110-155% of its nominal output voltage
Overcurrent protection:	Protected to short circuit conditions
Temperature coefficient:	$\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +60 $^{\circ}$ C (See Derating)
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Operation humidity:	20% to 80% non-condensing
Storage humidity :	10% to 90% non-condensing
Derating:	Derate output power linearly from 100% at 40 $^{\circ}$ C to 50% at 60 $^{\circ}$ C

PUP91 SERIES



SAFETY STANDARD APPROVALS



UL 60950-1, CSA C22.2 No. 60950-1
File No. E190414



TÜV EN 60950-1

GENERAL SPECIFICATIONS

Power factor:	0.90 Typical at 115 VAC
Efficiency:	89% minimum at full load
Hold-up time:	10 ms minimum at 100 VAC
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	60 A @ 115 VAC or 120 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	1500 VAC from input to ground and output
MTBF:	500,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332
Ingress Protection:	IP22 Compliant

EMC Performance	Class B conducted, class B radiated Class B conducted, class B radiated Class B conducted, class B radiated Harmonic distortion, class D
EN55022:	
FCC:	Line flicker
VCCI:	
EN61000-3-2:	
EN61000-3-3:	ESD, ± 8 KV air and ± 4 KV contact Radiated immunity, 3 V/m
EN55024	
EN61000-4-2:	Fast transient/burst, ± 1 KV
EN61000-4-3:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-4:	Conducted immunity, 3 Vrms
EN61000-4-5:	Magnetic field immunity, 1 A/m
EN61000-4-6:	Voltage dip immunity, 30% reduction for 500 ms
EN61000-4-8:	and >95% reduction for 10 ms
EN61000-4-11:	


OUTPUT VOLTAGE/CURRENT RATING CHART

Model ⁽¹⁾	Output						Average Active Efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽²⁾	Max. Power	
PUP91-13-2	19 V	0 A	4.74 A	±5%	350 mV	90 W	89 /89%
PUP91S-13-2	19 V	0 A	4.74 A	±5%	350 mV	90 W	89 /89%
PUP91-14	24 V	0 A	3.75 A	±5%	350 mV	90 W	90 /90%
PUP91S-14	24 V	0 A	3.75 A	±5%	350 mV	90 W	90 /90%
PUP91-18	48 V	0 A	1.88 A	±5%	350 mV	90 W	91 /91%
PUP91S-18	48 V	0 A	1.88 A	±5%	350 mV	90 W	91 /91%
PUP91-19	54 V	0 A	1.67 A	±5%	350 mV	90 W	90 /90%
PUP91S-19	54 V	0 A	1.67 A	±5%	350 mV	90 W	90 /90%

- NOTES:
- 1. PUP91 models are equipped with IEC320/C14 inlet, and PUP91S models with IEC320/C6 inlet.
 - 2. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF electrolytic capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

PUP91 and PUP91S Models

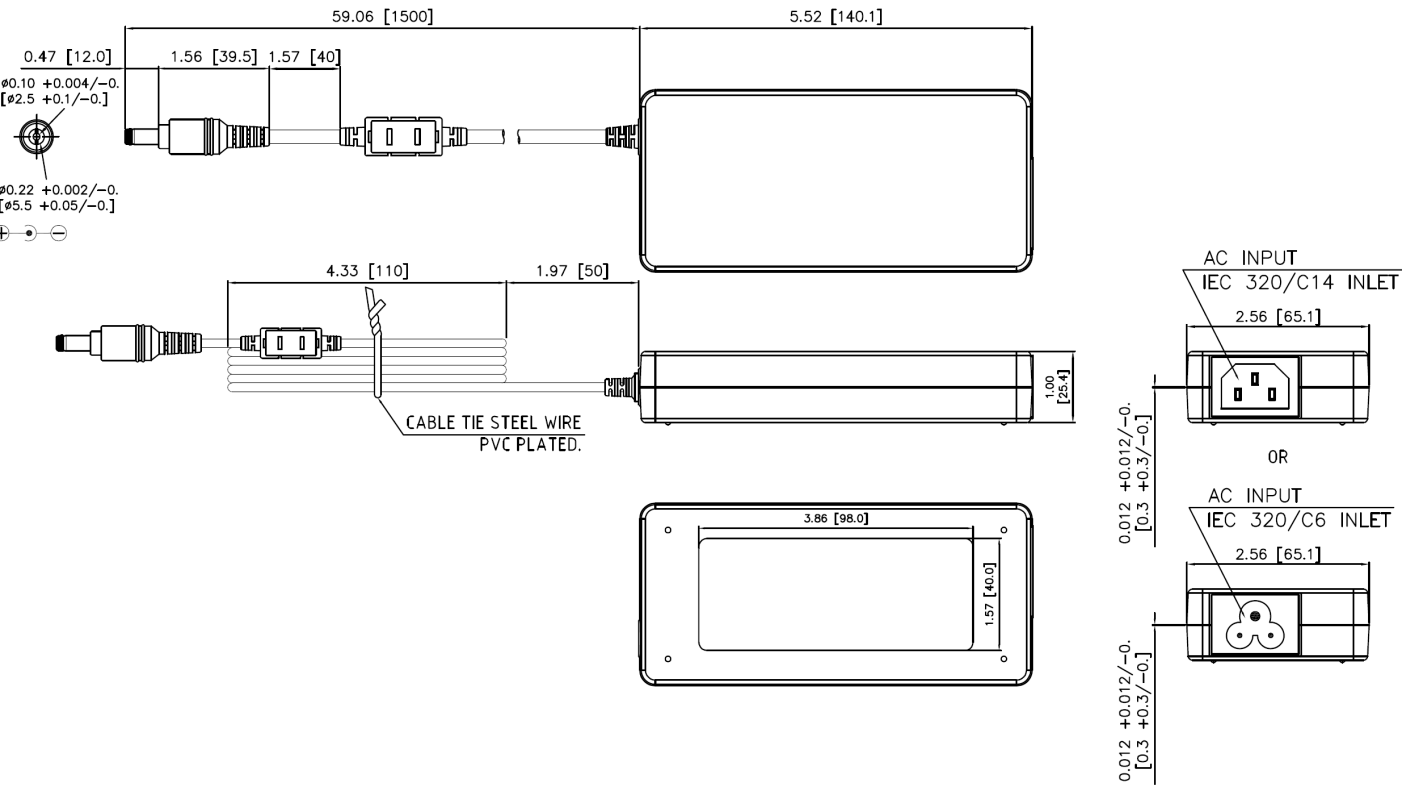

- NOTES:
- 1. Dimensions shown in inches [mm]
 - 2. Tolerance 0.02 [0.5] maximum
 - 3. Weight: 360 grams (0.79 lbs.) approx.
 - 4. Output return (-) is electrically connected to incoming Earth Ground through a 1M ohm resistor as standard.

PIN CHART

MODEL	CONNECTION
Polarity	