

## POWER SUPPLY DESIGN LEADER

N2Power continues to lead the power density race with its new small, high efficiency XR160 Series AC-DC power supplies. Our state of the art technology yields a very small footprint, reduces wasted power, and offers the highest power density in the market in the 160 watt range. This unique design means reduced energy costs, a greater return on your investment, higher reliability and longer product life.

## HIGHLIGHTS

- 160W AC-DC
- Up to 90% Efficiency
- High Power Density: 8.5 W / cu in.
- Universal AC input
- Active PFC (90-264 VAC)
- Built in OR-ing Diode/MOSFET for N+1 (Optional)
- Single Wire Current Sharing (Most Models)
- 3" X 5" Small Footprint
- <1U High: 1.25"
- 5Vsb @ 1amp & Remote Enable (ATX Models only)
- No Load Operation
- RoHS Compliant

## PFC READY, SAVE ENERGY

All XR160 products incorporate active PFC technology with universal input to provide superior efficiency in each supply. Comparisons of power loading show that our supplies can reduce consumption up to 50%.


## UNMATCHED POWER DENSITY

With an overall height of 1.25" and a 3" x 5" footprint, the XR160 Series boasts a power density of 8.5 watts per cubic inch. It is ideally suited for OEMs using industry standard 1U chassis.



### Typical Mechanical Drawing:

Inches (millimeters), connectors and pinouts may vary with model. Refer to XR160 Product Specification for complete information.

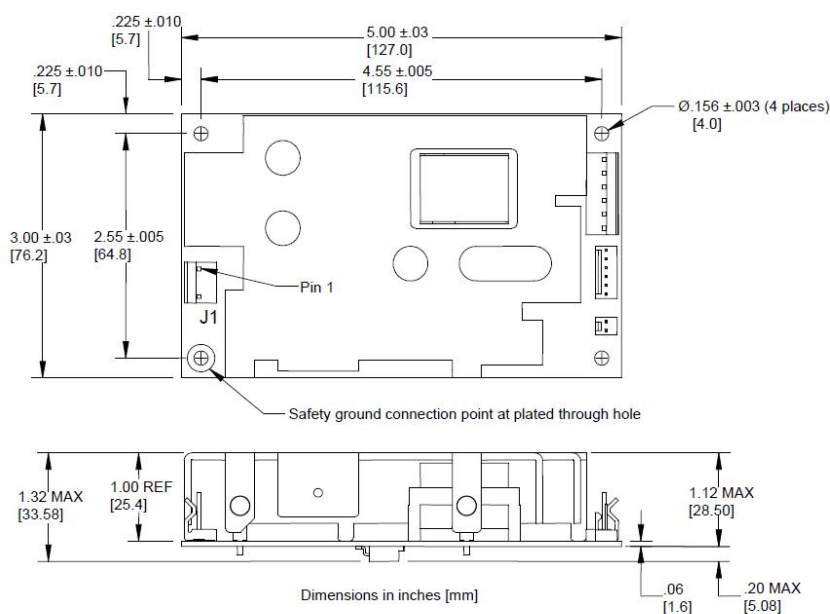

## HIGH EFFICIENCY IN A SMALL PACKAGE

The XR160 Series provides up to 90% efficiency in an AC-DC power supply. Our unique design reduces energy consumption and generates less wasted heat. It requires little forced air cooling, decreases AC loads, increases reliability and economy of operation.

Contact us regarding custom and modified standard supplies for unique applications.



| MODEL       | PART NUMBER | OUTPUT | VOLTAGE | REGULATION (%) | MAXIMUM CURRENT (A) | RIPPLE & NOISE (P-P) |
|-------------|-------------|--------|---------|----------------|---------------------|----------------------|
| XR160-12    | 400130-01-9 | V1*    | 12      | ±3             | 13.3                | 120 mV               |
| XR160-12 CS | 400130-02-7 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-15    | 400131-01-7 | V1*    | 15      | ±3             | 10.7                | 150 mV               |
| XR160-15 CS | 400131-02-5 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-19 CS | 400132-01-5 | V1*    | 19      | ±3             | 8.4                 | 190 mV               |
|             |             | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-24    | 400133-01-3 | V1*    | 24      | ±3             | 6.7                 | 240 mV               |
| XR160-24 CS | 400133-02-1 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-28    | 400134-01-1 | V1*    | 28      | ±3             | 5.7                 | 280 mV               |
| XR160-28 CS | 400134-02-9 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-30    | 400135-01-8 | V1*    | 30      | ±3             | 5.3                 | 300 mV               |
| XR160-30 CS | 400135-02-6 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-48    | 400136-01-6 | V1*    | 48      | ±3             | 3.3                 | 480 mV               |
| XR160-48 CS | 400136-02-4 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-51 CS | 400137-01-4 | V1*    | 51      | ±3             | 3.1                 | 510 mV               |
|             |             | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-54    | 400138-01-2 | V1*    | 54      | ±3             | 2.9                 | 540 mV               |
| XR160-54 CS | 400138-02-0 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-56    | 400139-01-0 | V1*    | 56      | ±3             | 2.8                 | 560 mV               |
| XR160-56 CS | 400139-02-8 | V2     | 12      | ±5             | 1.0                 | 120 mV               |
| XR160-1ATX  | 400125-02-7 | V1     | 3.3     | ±3             | 15.0                | 50 mV                |
|             |             | V2     | 5       | ±5             | 20.0                | 50 mV                |
|             |             | V3     | 12      | ±5             | 6.0                 | 120 mV               |
|             |             | V4     | -12     | ±5             | 1.0                 | 120 mV               |
|             |             | V5†    | 5sb     | ±5             | 1.0                 | 50mV                 |
| XR160-7ATX  | 400126-02-5 | V1     | 2.5     | ±3             | 15.0                | 50 mV                |
|             |             | V2     | 5       | ±4             | 20.0                | 50 mV                |
|             |             | V3     | 12      | ±5             | 6.0                 | 120 mV               |
|             |             | V4     | -12     | ±5             | 1.0                 | 120 mV               |
|             |             | V5†    | 5sb     | ±5             | 1.0                 | 50mV                 |
| XR160-8ATX  | 400127-02-3 | V2     | 5       | ±5             | 20.0                | 50 mV                |
|             |             | V3     | 12      | ±5             | 6.0                 | 120 mV               |
|             |             | V4     | -12     | ±5             | 1.0                 | 120 mV               |
|             |             | V5†    | 5sb     | ±5             | 1.0                 | 50mV                 |

CS = Current Sharing

\*OR-ing diode/MOSFET on V1 output

\*\*OR-ing diode on V1 / V2 output

† = 5V STBY with Remote Enable on – ATX models only.

| INPUT SPECIFICATIONS        |   |
|-----------------------------|---|
| Nominal Input Voltage:      | 100 – 240 VAC   |
| Maximum AC Input:           | 90 – 264 VAC  |
| Input Frequency Range:      | 47 – 63 Hz  |
| Input Current:              | 2.2 A @ 100 VAC   |
| Input Protection:           | 3.15 A fuse   |
| Safety Isolation:           | 3000 VAC input to output<br>1500 VAC input to ground    |
| Inrush Current:             | 33 A @ 115 VAC  |
| Leakage Current:            | < 1.0 mA  |
| Power Factor Correction:    | Active PFC circuitry, meets or exceeds EN61000-3-2      |
| OUTPUT SPECIFICATIONS       |   |
| Total Power:                | 160W  |
| Hold-up Time:               | Minimum 22 mS at all input voltages                     |
| Efficiency:                 | Up to 90% †   |
| Minimum Load:               | No load †   |
| Over / Under Shoot:         | Maximum 10% at turn-on                                  |
| 5V STBY (ATX Models)        | 5V / 1A   |
| PROTECTION                  |   |
| Overvoltage Protection:     | On all main outputs                                     |
| Overpower Protection:       | Protected / Auto-recovery                               |
| Short Circuit Protection:   | All outputs protected against short circuit             |
| Thermal Shutdown:           | Protected against over-temperature conditions           |
| OPERATING SPECIFICATIONS    |   |
| Operating Temperature:      | -25°C to +50°C  |
| Temperature Derating:       | 2.5% / degree C to 70°C                                 |
| Storage Temperature:        | -40°C to +85°C  |
| Forced Air Cooling:         | 10 CFM † Δ  |
| Convection Cooling:         | See Product Specification                               |
| MTBF:                       | > 600,000 hours @ 25°C *                                |
| SIGNALS                     |   |
| Remote Sense:               | On main output † Δ                                      |
| Current Sharing (Optional): | Active current sharing with OR-ing diode or MOSFETs † Δ |
| Power Good:                 | Provided  |
| PS_OK:                      | Output †  |
| LED (PG):                   | All models †  |
| Remote Enable               | ATX models only †                                       |

† See Product Specification Δ Some Models

\* See MTBF Report for additional temperature values

#### Compliance: 1

##### USA / Canada

**Safety:** Underwriters Laboratories: UL 60950-1:2007 (2nd Edition) / C22.2 No. 60950-1-07 Safety of Information Technology Equipment (ITE)

**EMC:** FCC part 15, subpart B

##### Europe

2006/95/EC - "Low Voltage (Safety) Directive"

Demko: EN 60950-1:2006 (2nd Edition) +A1:2010 +A11:2009 +A12:2011 +A2:2013

2004/108/EC "Electromagnetic Compatibility (EMC) Directive"  
EN 61204-3 Class B

##### International

IEC 60950-1:2005 (2nd Edition)+ Am1:2009 + Am2:2013

Safety of Information Technology Equipment

IEC 61204-3 Class B

<sup>1</sup> See Product Specification for additional information

**For complete specifications on all models, please visit our website at: [www.n2power.com](http://www.n2power.com)**

All information and specifications are based on our knowledge of the products at the time of printing. N2Power reserves the right to change specifications without notice.

Qualstar and the Qualstar logo are registered trademarks of Qualstar Corporation. N2Power and the N2Power logo are trademarks of Qualstar Corporation. All other trademarks are the property of their respective owners.