

# Features

## LED DRIVER

- 25W Class II AC-DC LED Power Supply
- 500mA, 700mA, 1050mA or 1400mA Output
- Active Power Factor Correction >0.90
- Efficiency to 85%
- EN and UL

### Selection Guide

Part Number	Rated Power (W)	Output Current (mA)	Output Voltage (VDC)	Efficiency (typ.)
RACD25-500P	25	500	42 - 52	82%
RACD25-700P	25	700	21 - 36	85%
RACD25-1050P	25	1050	16 - 24	84%
RACD25-1400P	25	1400	12-18	83%

**NOT RECOMMENDED FOR NEW DESIGNS**

### Specifications (measured at 230VAC and 25°C ambient temperature)

Input Voltage Range	90-295 VAC or 127-417 VDC	
Input Frequency Range	47-63Hz	
Power Factor	Full Load, 230VAC	>0.90
	Full Load, 115VAC	>0.98
THD	Full Load, 115VAC/230VAC	12% max.
	Full Load, 277VAC	14% max.
Current Accuracy	700mA Version	±7%
	others	±8%
AC Input Current	115VAC	0.4A
	230VAC	0.2A
Inrush Current (<2ms)	264VAC	Cold Start 20A
Isolation Voltage	3.75kVAC / 1minute	
Short Circuit Protection	Continuous	
Over Voltage Protection	110% - 150%	
Over Temperature Protection	Rth	Internal Thermistor
	Type	Auto-Recovery Mode
Vibration	10-500Hz, 2G, 60 Min. along X, Y and Z	
Storage Humidity	10% - 95% RH	
Operating Humidity	20% - 95% RH Non-Condensing	
Weight	220g	
Dimension	174.5 x 30.5 x 25mm	
Operating Temperature	-20°C to +50°C	
Storage Temperature	-40°C to +80°C	
Ripple & Noise	3V max.	
IP Rating	IP67	
Isolation Resistance	100MΩ / 500VDC at 25°C	
Safety Standards	EN61347-1	
	EN61347-2-13	
	UL8750	
	EN61000-3-2 Class C	
	EN61000-4-2,3,4,5,6,11	
	EN61547	
	EN55015 FCC15	
MTBF (+25°C)	using MIL-HDBK 217F	200 x 10 <sup>3</sup> hours
Desing Lifetime		70 x 10 <sup>3</sup> hours

The use of a circuit breaker with C-characteristic is recommended.

**LIGHTLINE**  
AC/DC-Converter  
with 5 year Warranty

**RECOM**


## 25 Watt PFC Single Output



**UL 8750 Certified**  
**EN 61347 Certified**

**RACD25-P**

## Derating-Graph (Ambient Temperature)

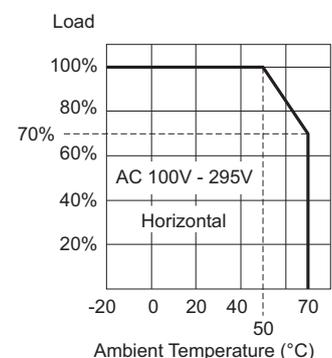


Note:

All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.

**Refer to Application Notes**

**Typical Characteristics**


Input Voltage vs. Output Load

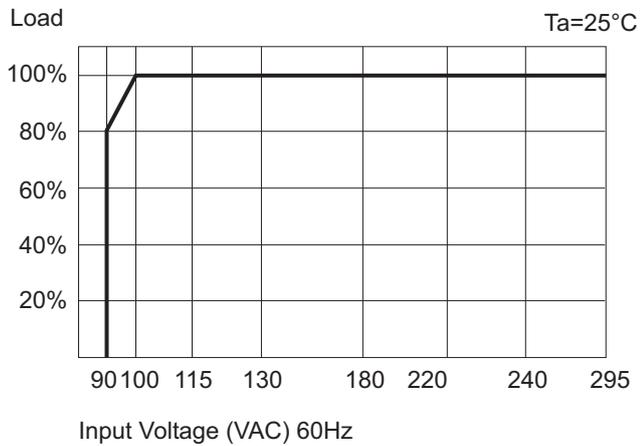

Maximum Number of LED drivers per circuit breakers

Condition	Circuit Breaker	Circuit Breaker Current			
		10A	16A	20A	25A
115VAC, 10hm 90° phase angle	Typ				
	C	32	48	57	72
230VAC, 10hm 90° phase angle	B	24	38	46	58
	C	38	62	74	92
277VAC, 10hm 90° phase angle	B	28	44	53	66
	C	44	71	84	106

**Package Style & Pinning**

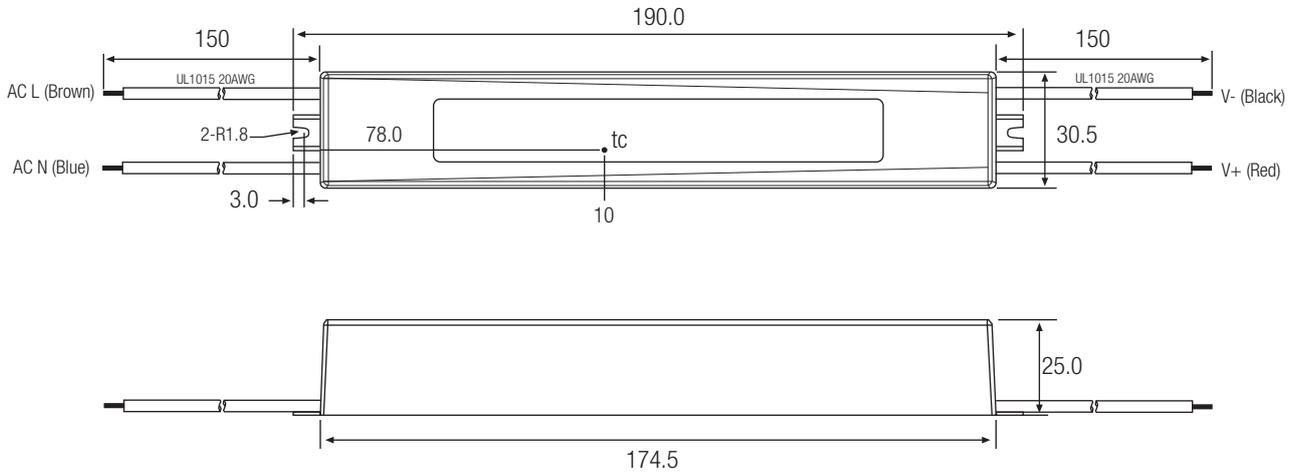

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.