

1 and 2 Watt SB Series DC/DC Converters

Key Features

- Standard SIP Package
- High Density / Compact size
- Efficiencies up to 80%
- Thru Hole mounting
- 1000 VDC input/output isolation
- No derating to 71°C Operating Temperature



Applications

- Distributed Power Systems
- Data-communications Equipment
- Telecommunications Equipment
- Computer Systems
- Industrial Control Systems

The "SB" Series of DC/DC converters feature 1 to 2 Watts of isolated power combining compact size and high efficiency. The small size of this 7 pin SIP package saves valuable board space in new product design. With single or dual outputs, the SB series is ideal for a variety of demanding requirements such as those found in the data-com/telecom, industrial control, computing, transportation, or office automation industries.

The size and pin out conform to internationally recognized packaging that is an industry standard. Operating from a nominal 5, 12, 24 or 48 VDC input source, this PCB mountable, low profile miniature converter provides single or dual unregulated, isolated outputs varying from 5 to 15VDC. It is designed to meet or exceed a variety of safety and emissions requirements including CE (LVD), EN 55022 "Class A", and UL 1950.

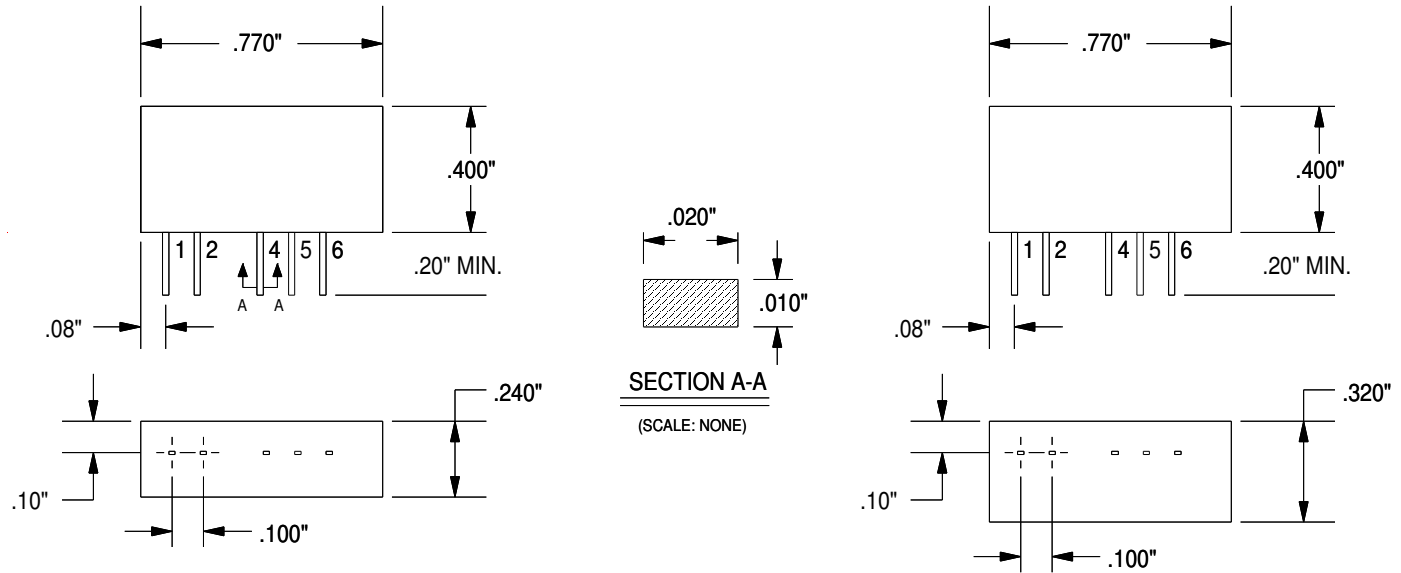
General Electrical Specifications

(Specifications at Nominal Input and 25 C, nominal input voltage and rated output current unless otherwise noted.)

Parameter	Limits	Conditions
Output Voltage Accuracy	See selection guide column 4.	Nominal Line, Full Load
Input / Output Isolation	1000VDC	For 60 seconds
Minimum Load	10% of Full Load	
Output Ripple & Noise	<100 mV Peak to Peak (max)	20 MHz Bandwidth
Load Regulation	7% typical (varies by model, consult factory for details)	10% to 100% of Full Load, Nominal Line
Line Regulation	1.2% output change per 1% input voltage change (max.)	Full Load
Efficiency	75% typical	Nominal Line
Operating Temperature	-25° C to +85° C	Ambient Temperature
Storage Temperature	-55° C to 125° C	Ambient Temperature
Temperature Coefficient	± 0.02%/°C	Output VDC
Short Circuit Protection	Intermittent (<2 sec)	Self Recovering
CE	LVD	
EMC / RFI	Input Capacitor	

Selection Guide

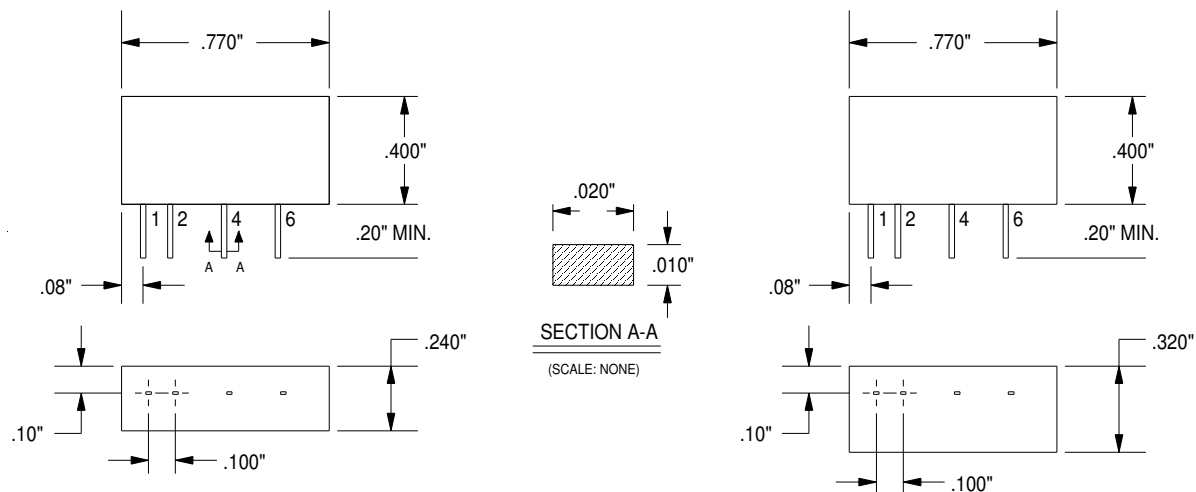
Device Type	Input Voltage Range VDC	Typical Input Current (A) @ Max Load	Output Voltage VDC	Max Output Current (A)	Product Style
SB5U5	4.75-5.25	0.267	5.0±10%	0.200	1S
SB5U12	4.75-5.25	0.270	12.0 ±10%	0.083	1S
SB5U15	4.75-5.25	0.270	15.0 ±10%	0.067	1S
SB12U5	10.8-13.2	0.111	5.0±10%	0.200	1S
SB12U12	10.8-13.2	0.111	12.0 ±10%	0.083	1S
SB12U15	10.8-13.2	0.111	15.0 ±10%	0.067	1S
SB24U5	21.6-26.4	0.056	5.0±10%	0.200	2S
SB24U12	21.6-26.4	0.056	12.0 ±10%	0.083	2S
SB24U15	21.6-26.4	0.056	15.0 ±10%	0.067	2S
SB48U5	43.2-52.8	0.028	5.0±10%	0.200	2S
SB48U12	43.2-52.8	0.028	12.0 ±10%	0.083	2S
SB48U15	43.2-52.8	0.028	15.0 ±10%	0.067	2S
SB5U5-5	4.75-5.25	0.267	±5 ±10%	±0.100	1D
SB5U12-12	4.75-5.25	0.267	±12 ±10%	±0.042	1D
SB5U15-15	4.75-5.25	0.267	±15 ±10%	±0.033	1D
SB12U5-5	10.8-13.2	0.110	±5 ±10%	±0.100	1D
SB12U12-12	10.8-13.2	0.110	±12 ±10%	±0.042	1D
SB12U15-15	10.8-13.2	0.110	±15 ±10%	±0.033	4
SB24U5-5	21.6-26.4	0.056	±5 ±10%	±0.100	2D
SB24U12-12	21.6-26.4	0.056	±12 ±10%	±0.042	2D
SB24U15-15	21.6-26.4	0.056	±15 ±10%	±0.033	2D
SB48U5-5	43.2-52.8	0.028	±5 ±10%	±0.100	2D
SB48U12-12	43.2-52.8	0.028	±12 ±10%	±0.042	2D
SB48U15-15	43.2-52.8	0.028	±15 ±10%	±0.033	2D
2SB5U9	4.9-5.1	0.560	9.0 ±3%	0.250	3
2SB12U5	10.8-13.2	0.222	5.0 ±10%	0.400	2S
2SB12U9	11.64-12.36	0.250	9.0 ±3%	0.250	2S
2SB24U9	21.6-26.4	0.125	9.0 ±3%	0.250	3
2SB48U9	43.2-52.8	0.062	9.0 ±10%	0.250	2S
2SB5U9-9	4.75-5.25	0.520	±9.0 ±10%	±0.110	2D
2SB12U9-9	10.8-13.2	0.220	±9.0 ±10%	±0.110	2D
2SB24U9-9	21.6-26.4	0.110	±9.0 ±10%	±0.110	2D
2SB48U9-9	43.2-52.8	0.055	±9.0 ±10%	±0.110	2D

Mechanical Specification & Pin Connections (dimensions in inches)


Tolerances: .XX ± 0.020 " .XXX ± 0.010 "

Style 1D
 SB5U5-5 SB12U5-5
 SB5U12-12 SB12U12-12
 SB5U15-15

Style 2D
 2SB5U9-9 SB24U15-15
 2SB12U9-9 SB48U5-5
 SB24U5-5 2SB48U9-9
 2SB24U9-9 SB48U12-12
 SB24U12-12 SB48U15-15

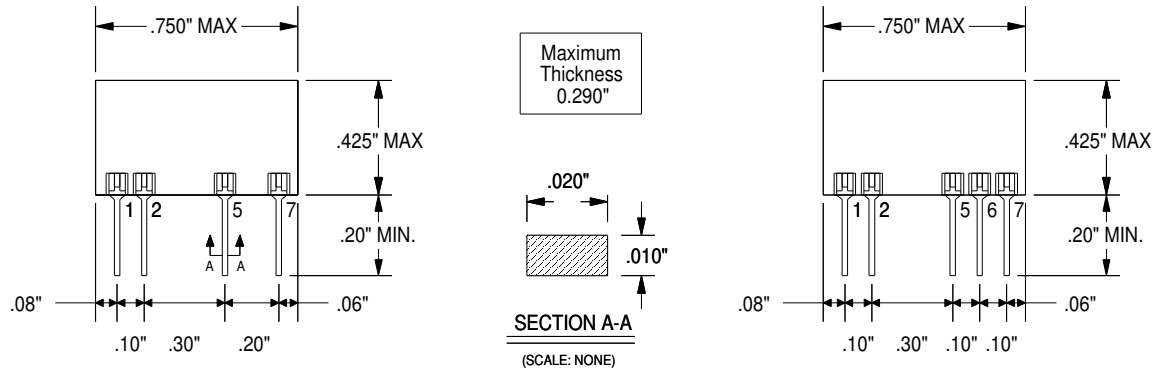
Mechanical Specification & Pin Connections (dimensions in inches)


Style 1S
 SB5U5 SB12U5
 SB5U12 SB12U12
 SB5U15 SB12U15

Style 2S
 2SB12U5 SB48U5
 2SB12U9 2SB48U9
 SB24U5 SB48U12
 SB24U12 SB48U15
 SB24U15

Single Output		Dual Output Models	
1	+ input	1	+ input
2	- input	2	- input-
4	- output	4	- output
6	+ output	5	com
		6	+ output

Alternative Pin Connections & Mechanical Dimensions (dimensions in inches)



Style 3*

2SB5U9
2SB24U9

Style 4*

SB12U15-15

* Styles 3 and 4 are coated, not potted in shells.

Single Output		Dual Output Models	
1	+ input	1	+ input
2	- input	2	- input
5	- output	5	- output
7	+ output	6	com
		7	+ output

Reliability Power Locations	
HEADQUARTERS & CUSTOMER SERVICE	SALES
Reliability Power, Incorporated 33 Musick Irvine, CA 92618 USA Tel: (949) 305-6700 Fax: (949) 305-6701 www.reliabilitypower.com	Reliability Power, Incorporated Attention: SALES Tel: (805) 449-1667 Fax: (805) 557-4530 sales@reliabilitypower.com