

Model : SI-EPF006480EU

SELV Constant Current LED driver

Wide operating area up to 1.4 A - Dimmable

Benefits

Wide operating range: 0.6 – 1.4 A

Adjustable current via LEDset

Long lasting and high reliability

Slim white metal housing 30 x 21 mm


Double output connectors (parallel connection)

Suitable for emergency lighting units.

Applications

Linear and area lighting

Office – industry - shop

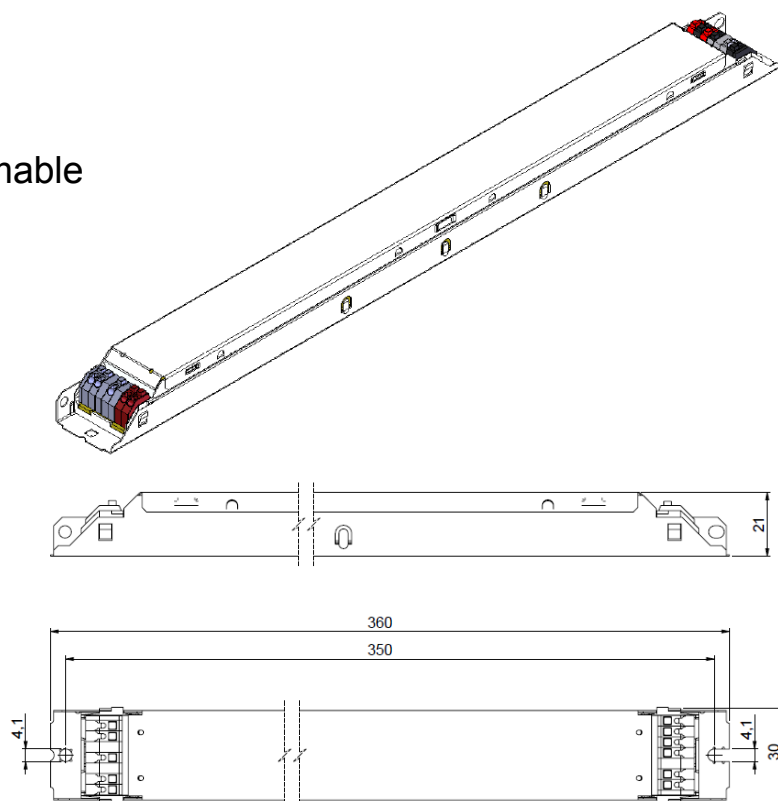

Approval marks



Housing material: metal, white painted.

Product Features

- Output current range 0.6 – 1.4 A
- Smart dimming down to 1%
- Very low output current ripple
- SELV equivalent, U_{out}: 20 – 54 V
- Output power up to 54 W
- Mains voltage 220 – 240 V
- Suitable for emergency lighting
- Overload protection
- Overtemperature protection
- Load hot plug protection
- 100'000 h lifetime at t_c = 65°C
- t_c max = 75 °C
- Wide t_a range -25 – +50 °C
- 5 years guarantee

Electrical Specifications

	Item	Value	Unit	Remarks
INPUT	Nominal voltage	220 – 240	V	
	Nominal frequency	0 / 50 / 60	Hz	Incl. DC or pulse DC
	AC voltage range	198 – 264	V	
	DC voltage range	176 – 276	V	DC or pulse DC
	Maximum voltage	350	Vac	2 h maximum, unit might not operate in this abnormal condition
	Nominal current	0.28	A	
	Total Harmonic Distortion (THD)	< 18	%	Full load, 220 – 240 V, 50 Hz / see graphs
	Power factor	> 0.95		Full load, 220 – 240 V, 50 Hz / see graphs
	Efficiency	> 87	%	Full load, 220 – 240 V, 50 Hz / see graphs
	Power losses	7.3	W	Maximum, full load, steady operation
	No-load power	n/a	W	Load switching on output side is safe but not permitted
	Stand-by power	< 500	mW	
	Protection class	I		PE can be connected either to terminal or housing
	Inrush current	53	A pk	Max, th = 200 µs
	Max. units per circuit breaker	B16: 13; B10: 8		I max = 53 A Th = 200 µs
OUTPUT	PE current	< 0.5	mA	Through PE, output floating
	Nominal voltage range	20 – 54	V	
	Maximum voltage	60	V	No load protection, restart trials every 2-3 s
	Nominal current range	600 – 1400	mA	LEDset open: 300 mA; LEDset short: 1.4 A
	Current accuracy	± 5	%	± 5% through the LEDset interface
	Current ripple	< 200	mA _{pk}	High frequency ripple (peak); low freq. ripple is negligible
	Nominal power range	20 – 54	W	Dimmable down to 0.2W
	Maximum power	54	W	
DIMMING	Galvanic isolation	SELV-equivalent		Output and LEDset to mains - Touch current < 0.7 mA
	Dimming control	yes		DALI and TouchDIM
	Dimming range	1 – 100	%	Of selected nominal current
	Dimming technique	mixed		1 – 30% PWM, 30 – 70% amplitude
	Frequency	> 450	Hz	1 – 30%;
ENVIRONMENT	Galvanic isolation	basic / double		Basic DALI to primary-earth / Double DALI to secondary
	Ambient temperature range t _a	-25 ...+50	°C	
	Maximum case temperature t _c	75	°C	Measured on t _c point indicated of the product label
	Max. case temp. in fault condition	110	°C	
	Storage temperature range	-25 ...+85	°C	
	Relative humidity	5 ... 85	%	Not condensing
	Surge transient protection	1 2	kV	L/N LN/PE acc to. EN 61547-5.7
	Environmental rating	Indoor		
	IP rating	IP 20		
	Mains switching cycles	> 100'000		
	Expected lifetime	50'000 100'000	h	t _c = 75°C, 0.2% / 1'000 h failure rate, 14 h ON / 10 h Stan-by per day t _c = 65°C, 0.1% / 1'000 h failure rate, 14 h ON / 10 h Stan-by per day

Protections


Overttemperature, Overload, No load, Short-circuit, Input overvoltage, Output overvoltage, Output undervoltage

See remarks on page 4.

Wiring Diagram

Input

- Gray 1 – Mains
- Gray 2 – Mains
- Gray 3 – n/a
- Gray 4 – PE
- White 5 – n/a
- White 6 – DALI
- White 7 – DALI

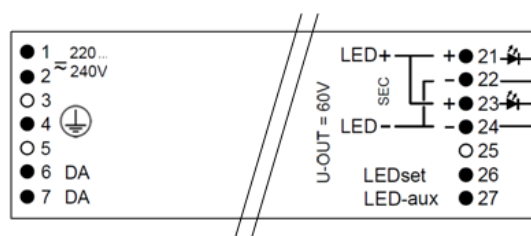

Output

- Red 21 – LED +
- Black 22 – LED –
- Red 23 – LED +
- Black 24 – LED –
- White 25 – n/a
- White 26 – LEDset
- Black 27 – LEDset-aux


**21 & 23 internally connected
22 & 24 internally connected**

- Connectors type, both input and output: Wago 250
- Wires cross section: massive leads 0.5 – 1.5 mm² / flexible leads 0.5 – 1.5 mm²
- Wires peeling length: 8.5 – 9.5 mm


Load wires length: 2 m max

N.B.: Two or more units cannot be connected together on secondary side with any or more of the 21 ... 27 terminals.


Typical Operating window

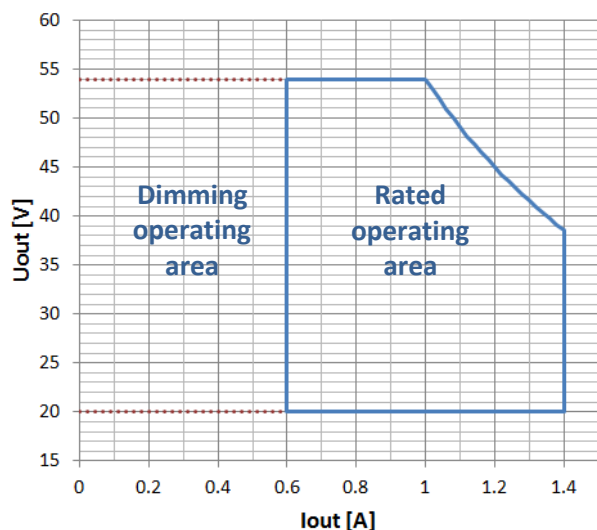


Typical Efficiency vs load

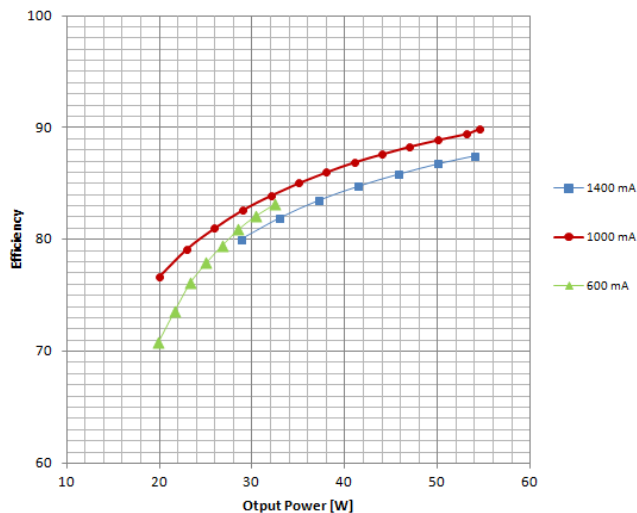


Typical Power factor vs load

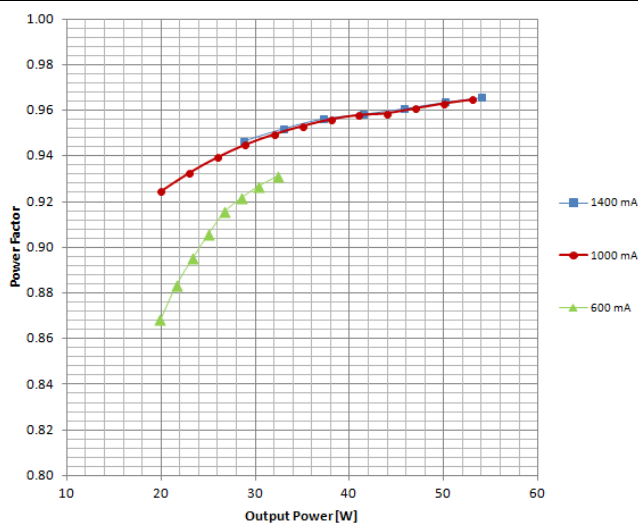

Typical THD vs load

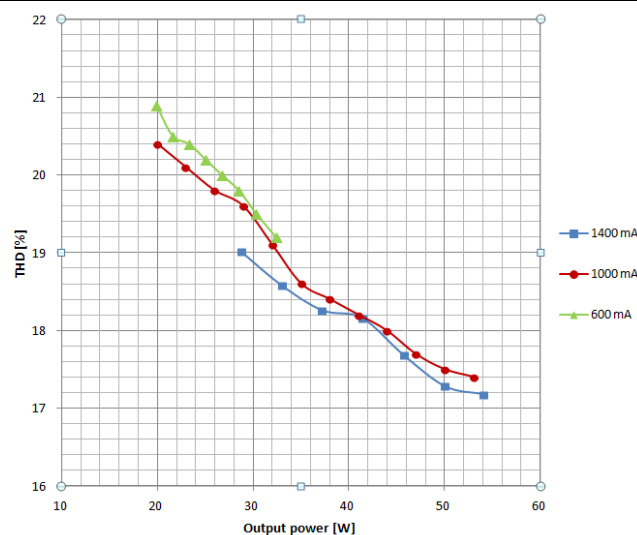

Typical Iout vs Rset

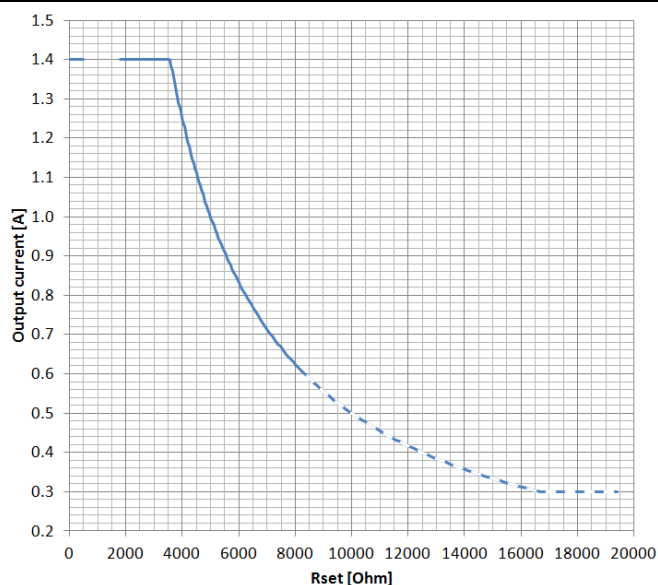


Rset formula and standard Iout values

$$I_{OUT[A]} = \frac{5V}{R_{set[\Omega]}} \times 1000$$

Iout [mA] nominal	Iout [mA] set, +/-5%	Rset [kOhm]
600	610	8.2 (E24)
	606	8.25 (E48)
700	735	6.8 (E24)
	699	7.15 (E48)
1050	1064	4.7 (E24)
	1027	4.87 (E48)
1400	1400	3.3 (E24)
	1400	3.48 (E48)

Refer to the LEDset application note for further details.

Product label

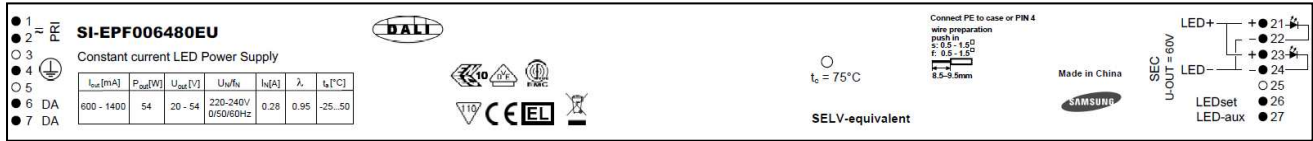

Remarks

- Input over voltage protection:** mains up to 350 Vac, for one hour maximum, will not destroy both the unit and the load; shut down of load might occur in this condition.
- Output short circuit / undervoltage protection:** shut down of load happens if U_{out} is below 20V (typ. 18V); the unit automatically tries to switch on the load again every 2-3 s for 0.1 s delivering the selected nominal current.
- Output overload protection:** the unit automatically reduces the output current to keep the output power below 54W.
- Output over voltage protection:** shut down of load happens if U_{out} exceeds 54V (typ. 55V); the unit automatically tries to switch on the load again every 2-3 s for 0.1 s delivering the selected nominal current.
- No load operation:** the unit automatically tries to switch on the load every 2-3 s for 0.1 s delivering the selected nominal current; despite this operation mode is safe for both unit and load, it is not recommended. Do not put a switch between load and unit.
- Over temperature protection:** the unit is protected against temporary overheating by automatic reduction of the output current when $75^\circ\text{C} < t_c < 95^\circ\text{C}$ typ., and by automatic power off if $95^\circ\text{C} < t_c < 100^\circ$ typ. The protection is self restoring.
- Touch current:** lower than 0.7 mA, according to EN 60598-1 ann. G and EN 61347-1 ann. A
- Switchover time:** lower than 0.5 s, both AC and DC mains.
- Output power hold time:** > 4 ms, in case of mains dips.
- Emergency lighting:** this LED power supply is suitable for emergency lighting fixtures acc. to EN 60598-2-22; EOF_I = 1% - 100% according to EN61347-2-13 ann J. Continuous output power at $t_a = 80^\circ\text{C}$ up to 30W.

Standards

EN 61347-1
EN 61347-2-13
EN 55015
EN 61547
EN 61000-3-2
EN 62384
EN 62386

Product name	EAN10	EAN40	NAED	Pieces / box
SI-EPF006480EU	4055462036292	4055462036308	n/a	20