

# ADP 35WA/35WC Series

Single Output, 35 Watt, Universal AC-DC Power Supplies



The ADP 35WA and 35WC Series are light, compact, and efficient power supplies. These supplies are ideal for a wide range of limited space applications from notebook computers to industrial instrumentation. The ADP Series quietly delivers continuous power, while complying with international safety standards. The ADP Series are enclosed in a modern molded plastic case.

## Features

- High Efficiency 82% to 84% Nominal
- Ultra Miniature Size, 100mm x 63mm x 27mm
- Light Weight, 250g
- Universal Input, 90 to 265 Vac
- Meets FCC & CISPR Level “B” EMI Requirements
- Tight Voltage Regulation
- Over-Current Protected
- Meets Worldwide Safety Standards
- WA Series – Constant Voltage, Constant Current Type
- WC Series – Constant Voltage, Current Foldback Type

Part Number	Rated Output Voltage	Rated Output Current	Overall Regulation	Overall Regulation	Ripple Noise	Efficiency
ADP35WA12.0/ ADP35WC12.0	12 V	2.6 A	0~2.9 A	11~13 V	450 mVpp	83%
ADP35WA13.5/ ADP35WC13.5	13.5 V	2.5 A	0~2.6 A	12.5~14.5 V	400 mVpp	82%
ADP35WA15.0/ ADP35WC15.0	15 V	2.3 A	0~2.3 A	14~16 V	350 mVpp	84%
ADP35WA16.0/ ADP35WC16.0	16 V	2.2 A	0~2.2 A	15~17 V	300 mVpp	83%

Note: 13.5 V Output available as 3 pin input option.

3100 Tower Boulevard

5th Floor University Tower

**SanKen**

Durham, NC 27707

(919) 402-1320 Fax: (919) 402-8540

# ADP 35WA/35WC Series

## SPECIFICATIONS

### INPUT

Input Voltage	Universal, 90 to 265 V
Input Frequency	47 to 63 Hz
Input Current	1.0 A or less
Inrush Current	100 A or less at cold start
Leakage Current	100 $\mu$ A max (240 V, 50 Hz)
Efficiency	82% to 84% nominal, full load
AC Turn-on Time	1.3 sec. at 90 V

### OUTPUT

Output Power	35 W
Over-Current Protection	Yes, Constant current
Over-Voltage Protection	Yes, Shut down
Thermal Protection	Yes, Shut down
Reset Time after Shutdown	32 sec. at 240 V

### ENVIRONMENTAL

Operating Temperature	0~+40°C
Storage Temperature	-20~+80°C
Cooling	Free air convection
Storage Humidity	10~90%
Operation Humidity	20~80%


Specifications subject to change without notice.

### VIBRATION

Frequency	5~100 Hz
Amplitude	25mm (max)
Acceleration	0.5 G
Sweep Time	60 sec.
Direction	X,Y,Z
Vibration Time	10 min.

### SHOCK

Storage	Passes lifting the unit and dropping it from 1 meter high to an oak board. 3 times, with no damage
Operation	Shock acceleration: 2.0 G, Sine wave: 10 ms Direction of force: X,Y,Z Apply 10 times in 1 sec. intervals
EMI Regulations	VCCI Class-II FCC Class-B (115 V) CISPR22 Class-B (230 V)
Safety Standards	Dentori UL 1950, UL 1310 CSA No. 950 (WA), C-UL No. 1950(WC) TUV EN60950
Hi-Pot Test	P-S 3 kv 1 min. (10 mA or less)
Insulation Resistance	P-S DC 500 V, 50 M $\Omega$ or more

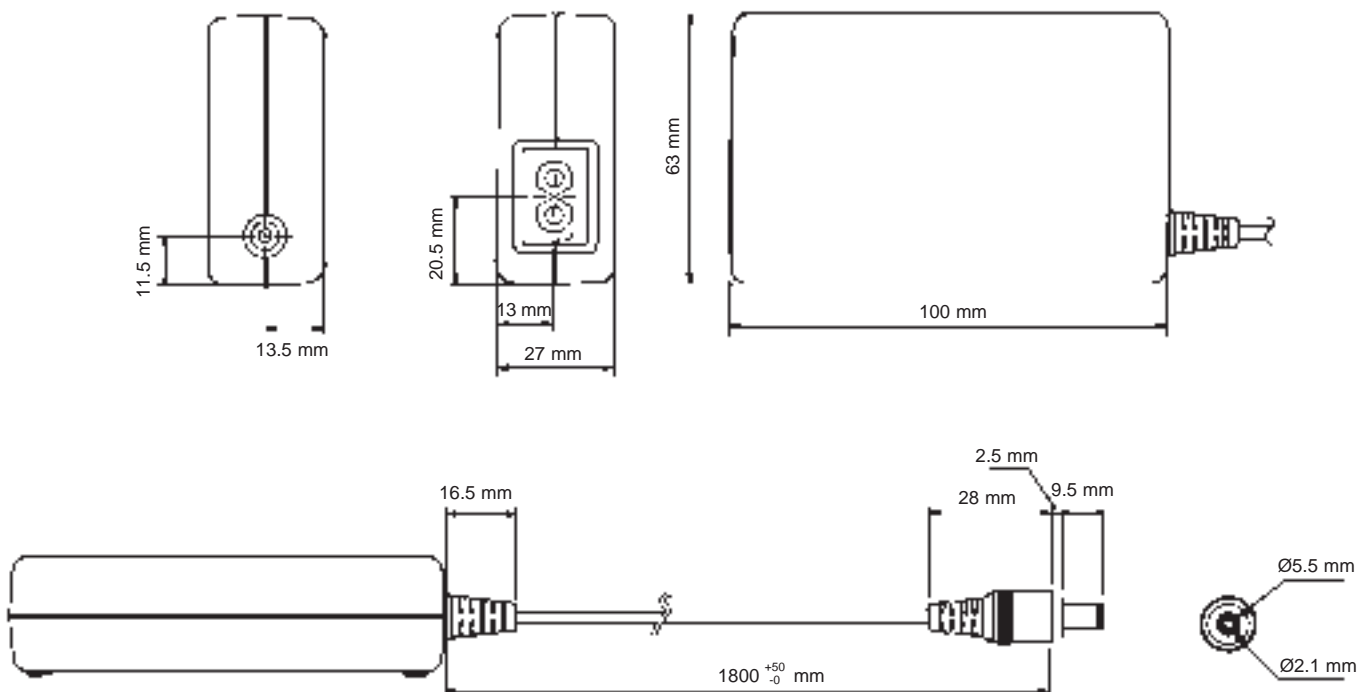

**Sanken**