Multi-Tier IEC Lock Appliance Outlets

Product Range

6.3mm Wide Terminal Type - 4 Tier

PA135015BK4

C13 4 Tier IEC Lock Appliance Outlet, 6.3 Terminal, 1.5mm Panel Thickness





V1.0

Errors & Omissions excluded. Specification is subject to change without notice


					scale		date		name	
					%	created	05.07.2017		FT	
						approved	05.07.2017		FT	
					SPECIFICATION					
rev.	modification / change no.		date	name	JOFEGIFICATION					
	AFFNER EMV AG 542 LUTERBACH	IIIIS	снағғ	ner	TBD	C13- 4 Tier Locking-Outlet				
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.						Α				
© Cop	yright Schaffner. All rights reserved.		www.scha	affner.com	plot date:	7/6/2017	р	age:	1 of 5	

Product Range

6.3mm Wide Terminal Type - 4 Tier

PA135015BK4

C13 4 Tier IEC Lock Appliance Outlet, 6.3 Terminal, 1.5mm Panel Thickness

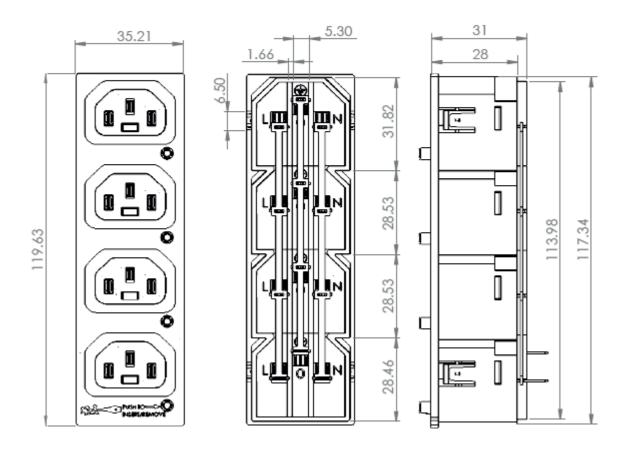

Errors & Omissions excluded. Specification is subject to change without notice


					scale		date		name	
					%	created	05.07.2017		FT	
						approved	05.07.2017		FT	
					SPECIFICATION					
rev.	modification / change no.		date	name	J SELOII IOATION					
	FFNER EMV AG 542 LUTERBACH	IIIIS	снағғ	ner	TBD	D C13- 4 Tier Locking-Outlet				
We reserve all rights in this document and in the information contained therein.							Α			
	yright Schaffner. All rights reserved.		www.scha	ffner.com	plot date:	7/6/2017	ŗ	oage:	2 of 5	

Product Range

4 Tier Aperture Dimensions ।

PA135015BK4

C13 4 Tier IEC Lock Appliance Outlet, 6.3 Terminal, 1.5mm Panel Thickness

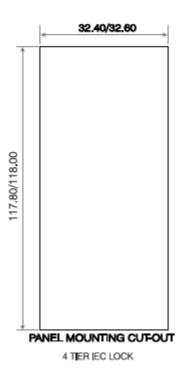

Errors & Omissions excluded. Specification is subject to change without notice

				scale		date		name	
				%	created	05.07.2017		FT	
					approved	05.07.2017		FT	
				SPECIFICATION					
rev.	modification / change no.	date	name						
	AFFNER EMV AG 542 LUTERBACH							et	
Passir	serve all rights in this document and in the informating on and/or copying of this document, use and/or cont is not permitted without authorization of Schaffner	ent, use and/or communication of its DRW TBD A							
© Cop	yright Schaffner. All rights reserved.	www.scha	affner.com	plot date:	7/6/2017	ŗ	age:	3 of 5	

HIGH THE TEXT IN C. I.	ock Appliance O	utlets					
Rating	10A/	250V AC (EN), 15A/250V AC (cUL)					
Insulation Resis	stance 10Ω (500V DC, 1 Min)					
Dielectric Strength 2KV (Lock Retention >100		(50Hz 1Min) to accessible surfaces					
	Back Cover	Polyamide 66 (PA66) - To RAL Colour 9004 (Signal Black) Gloss Finish					
	Contacts	Tin Plated Copper Alloy (CuSn5 PB102 1/2 Hard Phosphor Bronze)					
	Push Button	Polycarbonate - To RAL Colour 3020 (Traffic Red)					
	Spring	Steel (Zinc Plated, Clear Passivate and de-embrittle)					
	Locking Tab	Manganese Steel 65Mn (Zinc Plated to EN 1706) 5 Microns					
	Materia	ls are Low Smoke Zero Halogen (LSZH) compliant					
	100000000000000000000000000000000000000						
Datant	110000000						
Patent UK Number							
UK Number	2463	468					
UK Number EU Number	2463 0978	468 7171.9					
UK Number EU Number Russian Federa	2463 0978 tion 2474	468 7171.9 020					
UK Number EU Number	2463 0978 tion 2474	468 7171.9 020					
UK Number EU Number Russian Federa	2463 0978 tion 2474 ber 2,734	468 7171.9 020					
UK Number EU Number Russian Federa Canadian Numl	2463 0978 tion 2474 ber 2,734	468 7171.9 020					
UK Number EU Number Russian Federa Canadian Numl Standards & Ap	2463 0978 tion 2474 ber 2,734 oprovals	468 7171.9 020 1,113					

Errors & Omissions excluded. Specification is subject to change without notice

				scale		date	r	name	
				%	created	05.07.2017		FT	
					approved	05.07.2017		FT	
				SDECIE	CIEICATION				
rev.	modification / change no.	date	name	SPECIFICATION					
	NFFNER EMV AG 542 LUTERBACH	IISCHAFF	ner	TBD	C13- 4 Tie	er Locking-	05.07.2017 FT Locking-Outlet		
Passir	serve all rights in this document and in the inforning on and/or copying of this document, use and/out it is not permitted without authorization of Schaf	or communication		DRW	T	BD		Α	
© Cop	yright Schaffner. All rights reserved.	www.scha	ffner.com	plot date:	7/6/2017	,	oage:	4 of 5	

DECLARATION OF CONFORMITY

1. Issuer Name: Scolmore International Limited

Issuer Address: 1 Scolmore Park, Landsberg.

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration: C13

g. Group IEC Lock Multi-Tier Appliance Socket Outlets

b. Model(s) Number PA135015BK4, PA135015BK6

4. In accordance with the following legislation:

Document No Title

2013/35/EU Low Voltage Directive

 All products contained within the aforementioned, comply with the relevant standards and/or requirements listed below:

EN 60320-1:2015

UL498

CSA C22.2 No. 182.3-M1987

I hereby declare that the equipment named above has been designed to comply with the relevant sections
of the above referenced specifications. The unit complies with all applicable Essential Requirements of the
Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008.

This declaration has been issued under the sole responsibility of the manufacturer, signed at, for and on behalf of: Scolmore International Limited

Dumer

© Copyright Schaffner. All rights reserved.

Ross Turner - Technical Support Engineer

					scale		date	name		
					%	created	05.07.2017	FT		
						approved	05.07.2017	FT		
rev.	modification / change no.		date	name	SPECIF	IFICATION				
	AFFNER EMV AG 542 LUTERBACH	IIIIS	снағғ	ner	TBD	BD C13- 4 Tier Locking-Outlet				
Passii	serve all rights in this document and ng on and/or copying of this documer nt is not permitted without authorizati		DRW	٦	ΓBD	Α				

www.schaffner.com

plot date:

7/6/2017

page:

5 of 5