

power supply module Modicon Quantum - 120..230 V AC standalone

140CPS11100

! Discontinued on: Dec 31, 2022

! To be end-of-service on: Dec 31, 2030

! Discontinued - Service only

Main

Range Of Product	Modicon Quantum automation platform	
Product Or Component Type	Power supply module	
Power Supply Type	Standalone	

Complementary

Input Voltage	120230 V (100276 V) AC 4763 Hz
Input Current	200 mA at 230 V
	400 mA at 115 V
Inrush Current	10 A 230 V
	20 A 115 V
Rated Power In Va	50 VA
Associated Fuse Rating	1.5 A, slow-blow
Harmonic Distortion	<= 10 % of fundamental rms value
Output Voltage	5.1 V DC
Power Supply Output Current	3 A standalone
Output Overvoltage Protection	Internal
Output Overload Protection	Internal
Power Dissipation	2 + (3 x lout) where lout is in A
Local Signalling	1 LED (green) for power (PWR OK)
Marking	CE
Module Format	Standard
Net Weight	0.65 kg

Environment

Standards	UL 508 CSA C22.2 No 142	
Product Certifications	cUL FM Class 1 Division 2	
Resistance To Electrostatic Discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2	
Resistance To Electromagnetic Fields	10 V/m 802000 MHz conforming to IEC 801-3	
Ambient Air Temperature For Operation	060 °C	

Ambient Air Temperature For Storage	-4085 °C
Relative Humidity	95 % without condensation
Operating Altitude	<= 5000 m

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	665.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	7
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	4.543 kg

Contractual warranty

Warranty 18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >


Well-being performance

· · · · · · · · · · · · · · · · · · ·		
Mercury Free		
Rohs Exemption Information	Yes	
Ev Daha Disastina	Depositive consultance (Deposituate out of EU Del IC local consultance)	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
China Rohs Regulation	China RoHS declaration	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

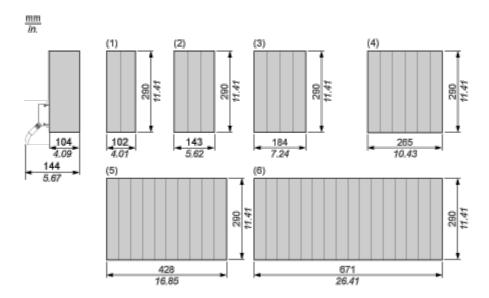

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Product data sheet

140CPS11100

Connections and Schema

115/230 Vac, 3 A Power Supply Module

Wiring Diagram

