

Back-UPS Office

Back-UPS Office 350VA

APC Back-UPS Office,225 Watts /350 VA,Input 120V /Output 120V

**Includes:** Basic UPS signalling RS-232 cable, CD with software, Cord management straps, User Manual



Be the first to [write a review](#)

BF350

DISCONTINUED

Email Technical Specifications

Printer Friendly

Locate a Partner

Product Category

- Computer and Peripheral
  - > Back-UPS
  - > Back-UPS BR
  - > Back-UPS Pro
  - > APC ES
  - > APC RS
  - > APC GS Pro
  - > Back-UPS Connect
- Home UPS (1)
- Network and Server (4)
- Data Center and Facility 3 Phase (14)
- Special Applications (5)
- UPS Management (7)
- UPS Replacement Batteries (2)



Return to Uninterruptible Power Supply (UPS)

Technical Specifications

Product Overview

Documentation

Options

Ratings and Reviews

Output

Output Power Capacity	225 Watts / 350 VA
Max Configurable Power	225 Watts / 350 VA
Nominal Output Voltage	120V
Output Connections	(3) NEMA 5-15R (Battery Backup)
	(3) NEMA 5-15R (Surge Protection)



Input

Nominal Input Voltage	120V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	NEMA 5-15P




Cord Length	1.83 meters
Input voltage range for main operations	98 - 132V

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Typical recharge time	9 hour(s)
Replacement Battery	<a href="#">RBC10</a>
RBC™ Quantity	1

Runtime Graph

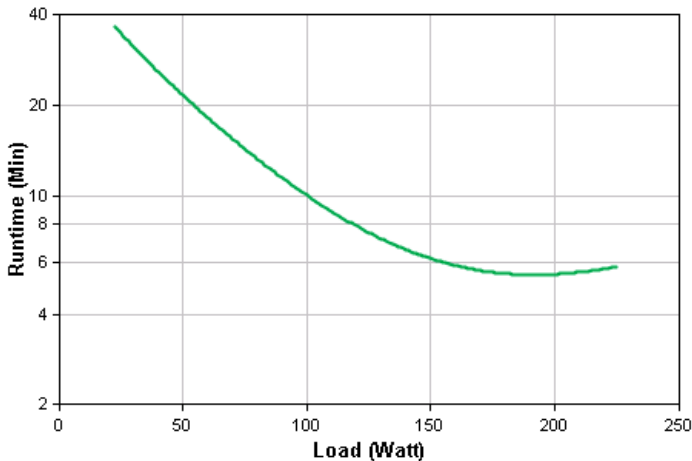

Hover over the line on the graph above to view the runtime at any desired load

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

Communications & Management

Control panel	LED status display with On Line : On Battery : Replace Battery and Building Wiring Fault
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm

Surge Protection and Filtering

Surge energy rating	445 Joules
Filtering	Full time multi-pole noise filtering : 5% IEEE surge let-through : zero clamping response time : meets UL 1449
Data Line Protection	RJ-45 Modem/Fax protection (two wire single line)

Physical

Maximum Height	69.00 mm
Maximum Width	432.00 mm
Maximum Depth	178.00 mm
Net Weight	3.73 KG
Shipping Weight	4.05 KG
Shipping Height	81.00 mm
Shipping Width	538.00 mm
Shipping Depth	178.00 mm
Color	Charcoal

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%

Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	45.00 dBA
Online Thermal Dissipation	60.00 BTU/hr
<b>Conformance</b>	
Regulatory Approvals	CSA, FCC Part 15 Class B, FCC Part 68, UL 1778
Standard Warranty	2 years repair or replace
<b>Sustainable Offer Status</b>	

\*\*The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.