




☐ World Wide [Change](#)
[Home](#)[Product](#)[Support](#)[Service](#)[Selectors](#)[How to Buy](#)

InfraStruXure Power Distribution Units

208V 20kW UPS w/ Bypass and Distribution

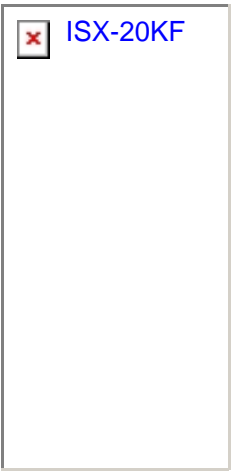

☐ [More Images](#)

APC InfraStruXure Power Distribution Units
Input: 208V 3PH , Input Connections: Hard W
4-wire (3PH + G) , Output: 120V, 208V 3PH

IncludesInstallation guide, User Manual

ISX-20KF

[Email Technical Specification](#)

[Printer Friendly](#)

Technical Specificatio **Product Overview** **Documentatio**

Output

Nominal Output Voltage
120V,208V 3PH
Maximum Total Current Draw per Phase
55.5A

Input

Nominal Input Voltage
208V 3PH
Input Frequency
60 Hz +/- 3 Hz
Input Connections
Hard Wire 4wire (3PH + G)
Number of Power Cords
1
Acceptable Input Voltage
200-240 VAC
Maximum Line Current per phase
70.900000000000006A
Maximum Input Current per phase
70.900000000000006A
Load Capacity
20 kVA
Load Power Factor Range
.99
Maximum Crest Factor
2.7000000000000002

Physical

Shipping Height
2146.00 mm
Shipping Width
699.00 mm
Shipping Depth
1006.00 mm
Color
Black

Environmental

Operating Environment
0 - 40 °C
Operating Relative Humidity
0 - 95%
Operating Elevation
0-3000 meters
Storage Temperature
-15 - 45 °C
Storage Relative Humidity
0 - 95%
Storage Elevation
0-15000 meters

Conformance

Regulatory Approvals
FCC Part 15 Class A,UL 1778
Standard Warranty
1 year repair or replace