




☐ World Wide [Change](#)

[Home](#)[Product](#)[Support](#)[Service](#)[Selector](#)[How to Buy](#)

InfraStruXure Power Distribution Units

InfraStruXure® PDU 40kW 400V/400V W/ MBP Xmerless

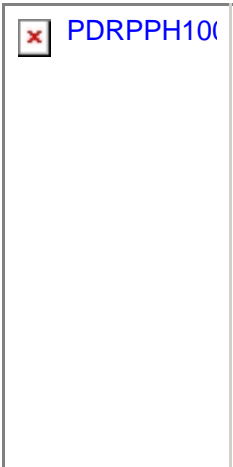

☐ [More Images](#)

APC InfraStruXure Power Distribution Units
Input: 400V 3PH , Output: 230V, 400V 3PH

IncludesInstallation guide, User Manual

Standard Lead TimeUsually Ships within 3 Weeks

PDRPPH1009M

[Contact Sales](#)

[Email Technical Specification](#)

[Printer Friendly](#)

- Technical Specificatio
- Product Overview
- Documentatio
- Options

Output

Nominal Output Voltage
230V,400V 3PH

Input

Nominal Input Voltage
400V 3PH
Input Frequency
50/60 Hz
Number of Power Cords
1
Maximum Input Current per phase
155A
Load Capacity
40 kVA

Physical

Net Weight
590.91 KG
Maximum Height
2057.00 mm
Maximum Width
610.00 mm
Maximum depth
914.00 mm
Shipping Weight
613.64 KG
Shipping Height
2184.00 mm
Shipping Width
914.00 mm
Shipping Depth
1219.00 mm
Color
Black
Units per Pallet
1.00

Environmental

Operating Environment
0 - 45 °C
Operating Relative Humidity
0 - 95%
Operating Elevation
0-3000 meters
Storage Temperature
-15 - 45 °C
Storage Relative Humidity
0 - 95%
Storage Elevation
0-9000 meters

Conformance

Regulatory Approvals
CE,TUV
Standard Warranty
1 year repair or replace