

You are here: Home > Products > Uninterruptible Power Supply (UPS) > Smart-UPS

Smart-UPS

APC Smart-UPS 1000VA 120V W/L5-15P & (6) L5-15R

APC Smart-UPS, 670 Watts / 1000 VA,
Input 120V / Output 120V , Interface Port DB-9
RS-232, SmartSlot

Includes: CD with software, Smart UPS signalling
RS-232 cable, User Manual

★★★★★
Be the first to [write a review](#)

SU1000X127

DISCONTINUED : recommended
replacement product [SUA1000](#)

Email Technical Specifications

Printer Friendly

Product Category

- Computer and Peripheral (5)
- Home UPS (2)
- Network and Server
- > **Smart-UPS**
- > Smart-UPS On-Line
- > Symmetra
- Data Center and Facility 3 Phase (14)
- UPS Management (7)

Return to Uninterruptible Power Supply (UPS)

Technical Specifications

Product Overview

Documentation

Software & Firmware

Options

Ratings and Reviews

Output

Output Power Capacity	670 Watts / 1000 VA
Max Configurable Power	670 Watts / 1000 VA
Nominal Output Voltage	120V
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal,57 - 63 Hz for 60 Hz nominal
Crest Factor	up to 5 : 1
Waveform Type	Sine wave
Output Connections	(6) NEMA L5-15R



Input


Nominal Input Voltage	120V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	NEMA L5-15P



Cord Length	1.83 meters
Input voltage range for main operations	92 - 147V
Input voltage adjustable range for mains operation	86 - 154V

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Typical recharge time	3 hour(s)
Replacement Battery	RBC6
RBC™ Quantity	1
Runtime Graph	

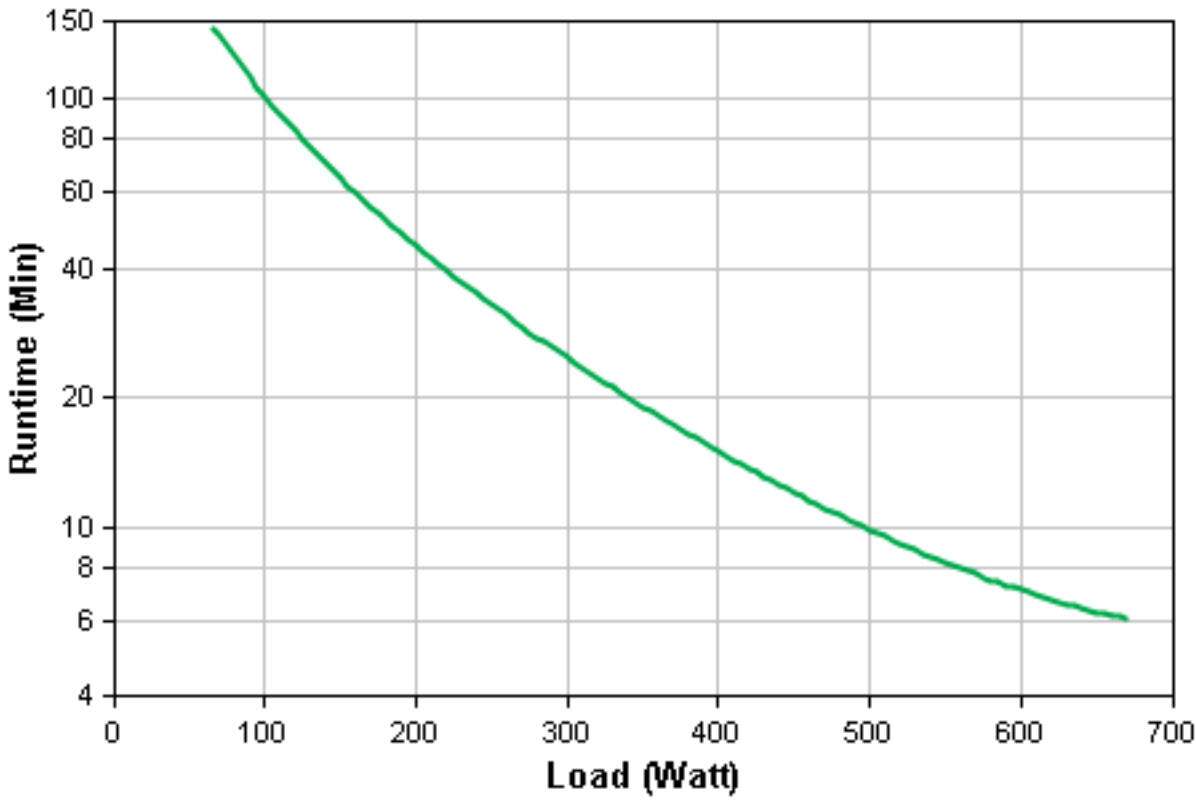

Hover over the line on the graph above to view the runtime at any desired load

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

Communications & Management

Interface Port(s)	DB-9 RS-232,SmartSlot
Available SmartSlot™ Interface Quantity	1
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : and Overload Indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays
Emergency Power Off (EPO)	Optional

Surge Protection and Filtering

Surge energy rating	480 Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	216.00 mm
Maximum Width	170.00 mm
Maximum Depth	439.00 mm
Net Weight	19.10 KG
Shipping Weight	20.92 KG
Shipping Height	387.00 mm
Shipping Width	320.00 mm
Shipping Depth	591.00 mm
Color	Beige

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters

Audible noise at 1 meter from surface41.00 dBA of unit

Online Thermal Dissipation	100.00 BTU/hr
----------------------------	---------------

Protection Class

--

Conformance

Standard Warranty	2 years repair or replace,optional on-site warranties available,optional extended warranties available
-------------------	--

**The time to recharge to 80% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.