

### **Products and Services**

Support

Your Business

Company

# You are here: Home > Products > Uninterruptible Power Supply (UPS) > Smart-UPS

**Smart-UPS** 

More Images

## **Product Category**

- Computer and Peripheral (5)
- Home UPS (2)

Solutions

- Network and Server
- > Smart-UPS > Smart-UPS On-Line
- > Symmetra Data Center and Facility 3 Phase

Power Supply (UPS)

- (14)
- UPS Management (7)



APC Smart-UPS 3000VA 208V

APC Smart-UPS, 2250 Watts / 3000 VA, Input 208V / Output 208V, Interface Port DB-9 RS-232, SmartSlot

Includes: CD with software, Smart UPS signalling RS-232

黄黄黄黄黄

Be the first to write a review



Printer Friendly cable, User Manual

Return to Uninterruptible

**Technical Specifications Product Overview** Documentation Software & Firmware Options Ratings and Reviews Output Output Power Capacity 2250 Watts / 3000 VA Max Configurable Power 2250 Watts / 3000 VA Nominal Output Voltage 2087 Also provides up to 400VA of 120V with (2) NEMA 5-15 receptacles Output Voltage Note Output Voltage Distortion Less than 5% at full load 47 - 53 Hz for 50 Hz nominal,57 - 63 Hz for 60 Hz nominal Output Frequency (sync to mains) Crest Factor up to 5:1 Waveform Type Sine wave Output Connections (2) NEMA 5-15R (1) NEMA L6-20R (2) NEMA L6-30R Input Nominal Input Voltage 208V Input Frequency 50/60 Hz +/- 3 Hz (auto sensing) Input Connections NEMA L6-20P 1.83 meters Cord Length Input voltage range for main 157 - 255V

151 - 268V

3 hour(s)

RBC11

1

	Curve	Part Number(s)			
R	untime G	raph			
R	RBC™ Quantity				

SU3000TNET

SU3000TNET

+ (1)SU48BP

**Communications & Management** 

Input voltage adjustable range for

operations

mains operation

Battery Type


Α

В

**Batteries & Runtime** 

Typical recharge time

Replacement Battery

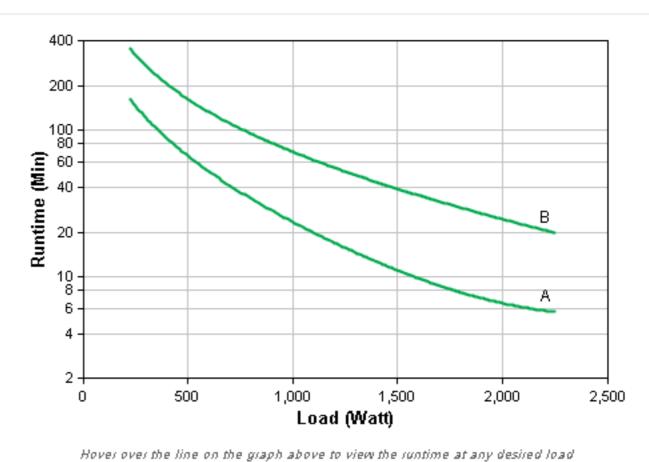

Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at

typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) View Enlarged Graph View Runtime Chart

Interface Port(s)	DB-9 RS-232,SmartSlot			
Available SmartSlot™ Interface Quantity	1			
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : and Overload Indicators			
Audible Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays			
Emergency Power Off (EPO)	Optional			
Surge Protection and Filtering				
Surge energy rating	960 Joules			
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449			
Physical				

Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449
Physical	
Maximum Height	432.00 mm
Maximum Width	196.00 mm
Maximum Depth	546.00 mm
Net Weight	62.27 KG
Shipping Weight	70.91 KG
Shipping Height	559.00 mm
Shipping Width	381.00 mm
Shipping Depth	762.00 mm
Color	Beige
Environmental	
Operating Environment	0 - 40 °C

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from su	urface53 00 dBA

Online Thermal Dissipation Conformance

375.00 BTU/hr

of unit

CSA,FCC Part 15 Class A,UL 1778 Regulatory Approvals Standard Warranty 2 years repair or replace, optional on-site warranties available, optional extended warranties available