

**You are here:** Home > Products > Uninterruptible Power Supply (UPS) > Smart-UPS

Smart-UPS

APC Smart-UPS 5000VA RM 7U w/Transformer 208V in and 120/208V out, black, L5-20R Receptacles



APC Smart-UPS, 3375 Watts / 4500 VA, Input 208V / Output 120V, 208V , Interface Port DB-9 RS-232, RJ-45 10/100 Base-T, SmartSlot , Rack Height 7 U

**Includes:** CD with software, Rack Mounting support rails, Smart UPS signalling RS-232 cable, User Manual

★★★★★  
Be the first to [write a review](#)





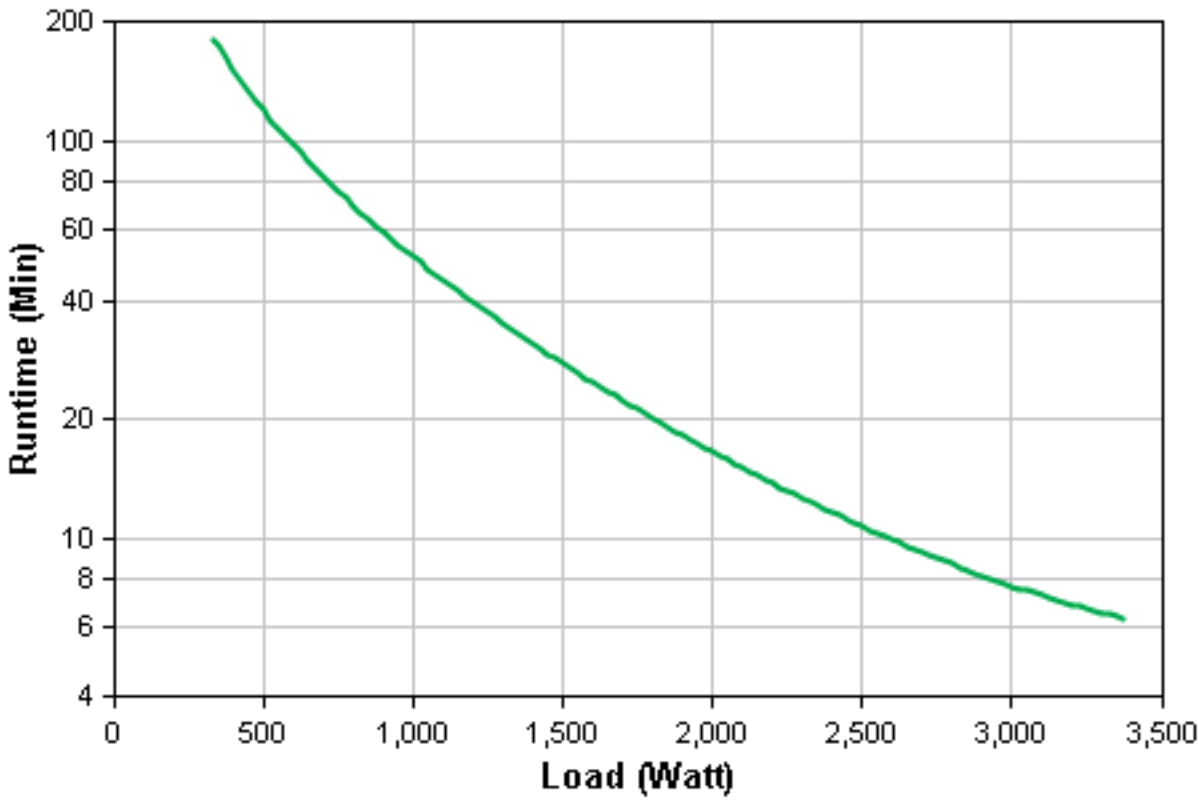
[More Images](#)

SU5000R5T-TF3

**DISCONTINUED** : recommended replacement product [SUA5000R5TXFMR](#)

- Email Technical Specifications
- Printer Friendly

[Return to Uninterruptible Power Supply \(UPS\)](#)

Technical Specifications	Product Overview	Software & Firmware	Options	Ratings and Reviews
<b>Output</b>				
Output Power Capacity	3375 Watts / 4500 VA			
Max Configurable Power	3375 Watts / 4500 VA			
Nominal Output Voltage	120V,208V			
Output Voltage Distortion	Less than 5% at full load			
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal,57 - 63 Hz for 60 Hz nominal			
Crest Factor	up to 5 : 1			
Waveform Type	Sine wave			
Output Connections	(2) NEMA 5-15R			
	(4) NEMA L5-20R			
	(2) NEMA L6-20R			
<b>Input</b>				
Nominal Input Voltage	208V			
Input Frequency	50/60 Hz +/- 5 Hz (auto sensing)			
Input Connections	NEMA L6-30P			
Cord Length	2.44 meters			
Input voltage range for main operations	157 - 255V			
Input voltage adjustable range for mains operation	151 - 268V			
<b>Batteries &amp; Runtime</b>				
Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof			
Typical recharge time	3 hour(s)			
Replacement Battery	<a href="#">RBC12</a>			
RBC™ Quantity	2			
Runtime Graph	<div><p>Hover over the line on the graph above to view the runtime at any desired load</p><p>Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.</p><div><a href="#">View Enlarged Graph</a><a href="#">View Runtime Chart</a></div></div>			
<b>Communications &amp; Management</b>				
Interface Port(s)	DB-9 RS-232,RJ-45 10/100 Base-T,SmartSlot			
Available SmartSlot™ Interface Quantity	1			
Pre-Installed SmartSlot™ Cards	<a href="#">AP961Z</a>			
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : and Overload Indicators			
Audible Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays			
Emergency Power Off (EPO)	Optional			
<b>Surge Protection and Filtering</b>				
Surge energy rating	1020 Joules			
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449			
<b>Physical</b>				
Maximum Height	311.00 mm			
Maximum Width	483.00 mm			
Maximum Depth	635.00 mm			
Rack Height	7U			
Net Weight	145.45 KG			
Shipping Weight	161.36 KG			
Shipping Height	635.00 mm			
Shipping Width	610.00 mm			
Shipping Depth	762.00 mm			
Color	Black			
<b>Environmental</b>				
Operating Environment	0 - 40 °C			
Operating Relative Humidity	0 - 95%			
Operating Elevation	0-3000 meters			
Storage Temperature	-15 - 45 °C			
Storage Relative Humidity	0 - 95%			
Storage Elevation	0-15000 meters			
Audible noise at 1 meter from surface of unit	53.00 dBA			
Online Thermal Dissipation	1708.00 BTU/hr			
<b>Conformance</b>				
Regulatory Approvals	CSA,FCC Part 15 Class A,UL 1778			
Standard Warranty	2 years repair or replace,optional on-site warranties available,optional extended warranties available			

\*\*The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.