


Products

RETAIL

M12D
M12II
ECO POWER 300
S12II
M12
S12 EnergyPlus

BULK

PC Power Supply
ATX
SFX
TFX
IPC & Server PSU
1U
2U
Open Frame
Adapter
80 PLUS PSU

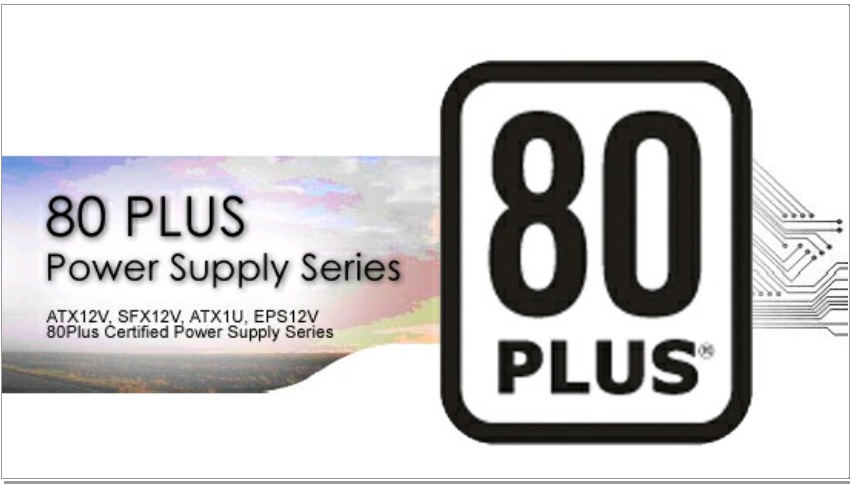

80 Plus power supply ATX12V 12cm fan Series

Form factor: [ATX](#)
Dimension: 150mm(5.9")*140mm(5.5")*86mm(3.4")
Safety: CB, CUL, UL, DEMKO, FIMKO, NEMKO, SEMKO, TUV
EM/RFI: BSM, CE, FCC, C-tick

Catalog

Features:
Active PFC (99%)
High Efficiency (80%)
80 Plus certified
Ultra Quiet (25dBA)
SLI Certified*
PCI Express**
RoHS & WEEE compliant

DC Output:		AC Input: 100~240Vac 50/60Hz					
Model	3.3V	5V	12V1	12V2	-12V	5Vsb	Total Power
SS-300ET	18A	20A	17A	17A	0.8A	2.5A	300W
Specification	120W		24A/288W		9.6W	12.5W	
SS-350ET	20A	20A	17A	17A	0.8A	2.5A	350W
Specification	130W		27A/324W		9.6W	12.5W	
SS-400ET	20A	20A	17A	17A	0.8A	2.5A	400W
Specification	130W		30A/360W		9.6W	12.5W	
SS-500ET	24A	24A	17A	17A	0.8A	2.5A	500W
Specification	130 W		34 / 408W		9.6W	12.5W	

Where to Buy



80 Plus PC power supply ATX12V 8cm fan Series

Form factor: [ATX](#)
Dimension: 150mm(5.9")*140mm(5.5")*86mm(3.4")
Safety: CB, CUL, UL, CCC, DEMKO, FIMKO, NEMKO, SEMKO, TUV
EM/RFI: BSM, CE, FCC, C-tick

Catalog

Features:
Active PFC (99%)
High Efficiency (78%)
Ultra Quiet (25dBA)
PCI Express
RoHS & WEEE compliant

DC Output:		AC Input: 100~240Vac 50/60Hz					
Model	3.3V	5V	12V1	12V2	-12V	5Vsb	Total Power
SS-300ES	18A	20A	17A	17A	0.8A	2.5A	300W
Specification	120W		24 / 288W		9.6W	12.5W	
SS-350ES	20A	20A	17A	17A	0.8A	2.5A	350W
Specification	130W		27 / 324W		9.6W	12.5W	
SS-400ES	20A	20A	17A	17A	0.8A	2.5A	350W
Specification	130W		30A/360W		9.6W	12.5W	
SS-500ES	24A	24A	17A	17A	0.8A	2.5A	500W
Specification	130 W		34A/408W		9.6W	12.5W	

Where to Buy



80 Plus power supply SFX12V 8cm fan Series

Form factor: [SFX](#)
Dimension: SS-300SFD / 150mm(5.9")*140mm(5.5")*86mm(3.4")SS-XXXSFE / 130mm(5.1")*125mm(4.9")*64mm(2.5")
Safety: CB, CUL, UL, CCC, DEMKO, FIMKO, NEMKO, SEMKO, TUV
EM/RFI: BSM, CE, FCC, C-tick

Catalog

Features:
Active PFC (99%)
High Efficiency (78%)
Ultra Quiet (22dBA)
PCI Express
RoHS & WEEE compliant

DC Output:		AC Input: 100~240Vac 50/60Hz					
Model	3.3V	5V	12V1	12V2	-12V	5Vsb	Total Power
SS-300SFD	20A	20A	8A	14.5A	0.8A	2A	300W
Specification	125W		22.5A/270W		9.6W	10W	
SS-300SFE	20A	20A	8A	14.5A	0.8A	2A	300W
Specification	125W		22.5A/270W		9.6W	10W	
SS-350SFE	20A	20A	18A	18A	0.8A	2A	350W
Specification	125W		26A/312W		9.6W	10W	

Where to Buy



Catalog

80 Plus power supply ATX1U Series

Form factor: [ATX1U](#)
Dimension: 150mm(5.9")*81.5mm(3.2")*40.6mm(1.6")
Safety: CB, CUL, UL, TUV
EM/RFI: BSM, CE, FCC, C-tick

Features:
High Efficiency (75%)
Ultra Quiet (25dBA)
RoHS & WEEE compliant

DC Output:		AC Input: 100~240Vac 50/60Hz					Total Power
Model	3.3V	5V	12V1	12V2	-12V	5Vsb	
SS-250SU	14A	17A	8A	14A	0.8A	2A	250W
Specification	110W		18A/ 216W		9.6W	10W	

Where to Buy



Catalog

Features:
High Efficiency (75%)
Ultra Quiet (25dBA)
RoHS & WEEE compliant




80 Plus power supply EPS12V 12cm fan Series Series

Form factor: EPS
Dimension: 150mm(5.9")*140mm(5.5")*86mm(3.4")
Safety: CB, CUL, UL, TUV
EM/RFI: BSM, CE, FCC, C-tick

DC Output:		AC Input: 100~240Vac 50/60Hz						
Model	3.3V	5V	12V1	12V2	12V3	-12V	5Vsb	Total Power
SS-550JT	24A	24A	18A	18A	18A	0.8A	3A	550W
Specification	140W		42A/ 504W		9.6W	15W		
SS-650JT	24A	30A	18A	18A	18A	0.8A	3A	650W
Specification	170W		52A/ 624W		9.6W	15W		

Where to Buy



Catalog

Features:
High Efficiency (75%)
Ultra Quiet (25dBA)
RoHS & WEEE compliant

DC Output:	AC Input: 100~240Vac 50/60Hz							Total Power
Model	3.3V	5V	12V1	12V2	12V3	-12V	5Vsb	
SS-550JS	24A	24A	18A	18A	18A	0.8A	3A	550W
Specification	140W		42A/ 504W		9.6W	15W		
SS-650JS	24A	30A	18A	18A	18A	0.8A	3A	650W
Specification	170W		52A/ 624W		9.6W	15W		

Where to Buy

[About Us](#) | [Products](#) | [Service](#) | [Where to Buy](#) | [Seasonic Store](#)

Copyright © 2005 SeaSonic Electronics Co., Ltd. All Rights Reserved.