

| DHM5

PROGRAMMABLE INCREMENTAL ENCODERS



Features

The programmable encoder: DIGISINE™, unique combination of performance and flexibility.

- Easy programming without any specific software or hard-ware
- Robustness and excellent resistance to shocks / vibrations
- High protection level IP65, IP67 option with a sealing flange
- High resolutions available : up to 80 000 cpt
- Universal electronic circuits from 5 to 30 Vdc
- High performances in temperature -30°C to $+70^{\circ}\text{C}$ (option -40°C)
- High performances in frequency of output signals : 300 kHz




SPECIFICATIONS

Material	Cover: Zinc alloy Body: Aluminium Shaft: Stainless steel
Bearings	6,000 series
Maximum Loads	Axial: 50 N Radial: 100 N
Shaft Inertia	$\leq 1.10^{-6} \text{ kg.m}^2$
Torque	4.10^{-3} N.m
Permissible Max. Speed	12 000 min^{-1}
Continuous Max. Speed	9, 000 min^{-1}
Shocks (EN60068-2-27)	$\leq 500 \text{ m.s}^{-2}$ (during 6 ms)
Vibrations (EN60068-2-6)	$\leq 100 \text{ m.s}^{-2}$ (55 ... 2 000 Hz)
EMC	EN 50081-1, EN 61000-6-2
Isolation	1 000 V eff
Encoder Weight (Approx.)	0,300 kg
Operating Temperature	- 30 ... + 100°C (encoder T°)
Storage Temperature	- 40 ... + 800°C
Protection (EN 60529)	IP 65 (IP67 with flange option)

Theoretical Mechanical Lifetime 109 Turns ($F_{\text{axial}} / F_{\text{radial}}$)	
25 N / 50 N	99
50 N / 100 N	12



DIGITAL OUTPUT SIGNALS (SQUARE WAVE SIGNALS)

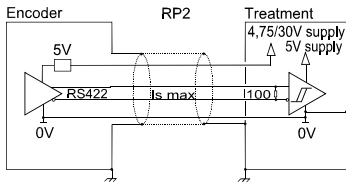

RP2 Electronic (300kHz)


Supply: 4,75 to 30Vdc

Cons. without Load: 75mA max

Current Per Channel: 40mA max

0 Max (Is=20mA): $V_{ol} = 0,5Vdc$

1 Min (Is=20mA): $V_{oh} = 4Vdc$



PP5 Electronic (300kHz)

Supply: 5 to 30Vdc

Cons. without Load: 75mA max

Current Per Channel: 40mA max

0 Max (Is=20mA): $V_{ol} = 0,5Vdc$

1 Min (Is=20mA): $V_{oh} = V_{cc}-2,5Vdc$

Protection against short circuits and against reverse polarity for all the electronics.



STANDARD CONNECTIONS

		-	+	A or S	B or C	0 or Z	A/ or S/	B/ or C/	0/ or Z/	Ground
G6	M23 - 12 Pins CW	1	2	3	4	5	6	7	8	Connector Body
G8	M23 - 12 Pins CCW	10 + 11	2 + 12	8	5	3	1	6	4	Connector Body
G3	PVC Cable 8 Wires 8230/020	WH White	BN Brown	GN Green	YE Yellow	GY Grey	PK Pink	BU Blue	RD Red	General Shielding
GP	PUR Cable 12 Wires 8230/050	WH White + WH/GN White /Green	BU Blue + BN/GN Brown / Green	GY Grey	BN Brown	RD Red	PK Pink	GN Green	BK Black	General Shielding



AVAILABLE INTERPOLATED RESOLUTIONS

Easy multiplication of the basis resolution of the disk: 1, 2, 3, 4, 5, 8, 10, 12 and 16 times per dip-switch without specific software nor hardware.



Interpolation Factor	Basic Resolutions										
	250	256	360	500	1024	2500	3000	3600	4000	4096	5000
X 1	250	256	360	500	1024	2500	3000	3600	4000	4096	5000
X 2	500	512	720	1000	2048	5000	6000	7200	8000	8192	10000
X 3	750	768	1080	1500	3072	7500	9000	10800	12000	12288	15000
X 4	1000	1024	1440	2000	4096	10000	12000	14400	16000	16384	20000
X 5	1250	1280	1800	2500	5120	12500	15000	18000	20000	20480	25000
X 8	2000	2048	2880	4000	8192	20000	24000	28800	32000	32768	40000
X 10	2500	2560	3600	5000	10240	25000	30000	36000	40000	40960	50000
X 12	3000	3072	4320	6000	12288	30000	36000	43200	48000	49152	60000
X 16	4000	4096	5760	8000	16384	40000	48000	57600	64000	65536	80000

switchs position


factor	CODE SWITCH			
	1	2	3	4
x 1	ON	ON	ON	ON
x 2	ON	ON	ON	ON
x 3	ON	ON	ON	ON
x 4	ON	ON	ON	ON
x 5	ON	ON	ON	ON
x 8	ON	ON	ON	ON
x 10	ON	ON	ON	ON
x 12	ON	ON	ON	ON
x 16	ON	ON	ON	ON




DIMENSIONS

All dimensions are in millimeters.

DHM5_10 Connection G3R (Radial Cable)

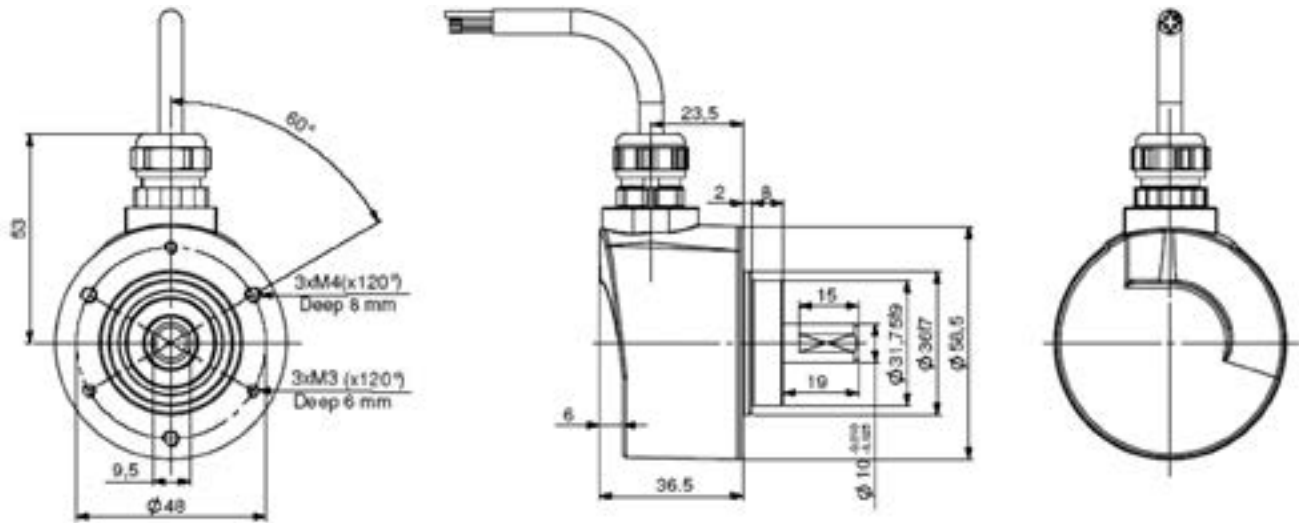

DHM5_06 Connection G6R (radial M23), Flange 9500/003* Mounted on the Body

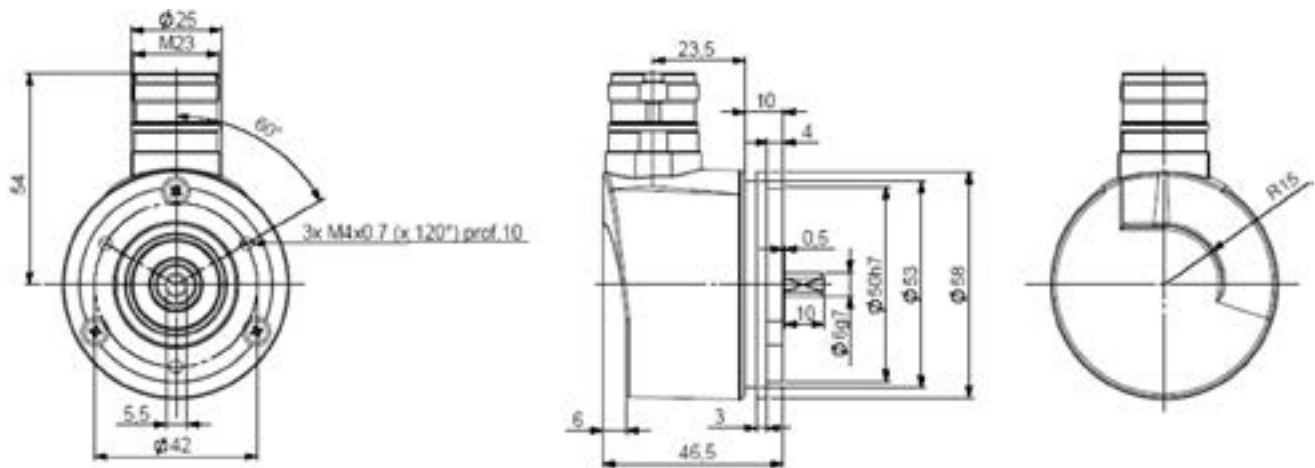



ORDERING OPTIONS

Example : DHM5_06 // R P2 9 // 5000 // GP R020

Contact the factory for special versions, ex: electronics, special flanges, connections

	DHM5	06	//	R	P2	9	//	5000	//	GP	R020
Family											
DHM5											
Ø Axe											
06: 6mm											
10: 10mm											
08: 8mm (option)											
Supply											
Digital Signals (Square Wave)											
R: 4.75 to 30Vdc											
P: 5 to 30Vdc											
Output Stage											
Digital Signals											
P2: driver 5Vdc RS422											
P5: push-pull											
Output Signals											
Digital Signals											
9: A,A/,B,B/,0,0/ (0 gated A & B)											
Resolution											
Digital Signals											
5,000 (max)											
Basic resolution											
Connection											
G6: M23 12 pins CW											
G5: M23 12 pins CW											
G8: M23 12 pins CCW											
G1: Solenoid valve 4 pins											
G2: DIN 5 pins											
GD: DIN 8 pins											
GP: PUR cable 12 wires											
G3: PVC cable 8 wires											
Connection Orientation											
R: Radial											
Ex: R020: radial cable 2m											



AGENCY APPROVALS & CERTIFICATIONS



Made in France

Page 4

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727

sensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080

position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006

ext 2808