

REV.	REVISION DESCRIPTION	ECN NO.	DATE
A	INITIAL RELEASE FOR PRODUCTION; GML	ECO-052432	05-MAR-2010

TEMPERATURE RANGE..... 300°F MAX.

ELECTRICAL RATING.....(1 & 3) 120VAC - 25A RES, 10 FLA, 60 LRA, 125VA
240VAC - 25A RES, 5 FLA, 30 LRA, 125VA

ELECTRICAL RATING.....(1 & 2) 120VAC - 10A RES, 5.8 FLA, 34.8 LRA, 125VA
240VAC - 5A RES, 2.9 FLA, 17.4 LRA, 125VA

LIFE AT RATED LOAD.....100,000 CYCLES

DIELECTRIC STRENGTH..... 1554 VRMS TERMINALS TO MOUNTING

UL RECOGNIZED..... FILE E9977, GUIDE XAPX2, FILE MP986, GUIDE MBPR2


UL RECOGNIZED FOR CANADA....FILE E9977, GUIDE XAPX8, FILE MP986, GUIDE MBPR8

OPERATING TEMPERATURE:


OPEN TEMP. 194° F ±5°

CLOSE TEMP. 156° F ±6°

TEMP. CODE L194-3.8

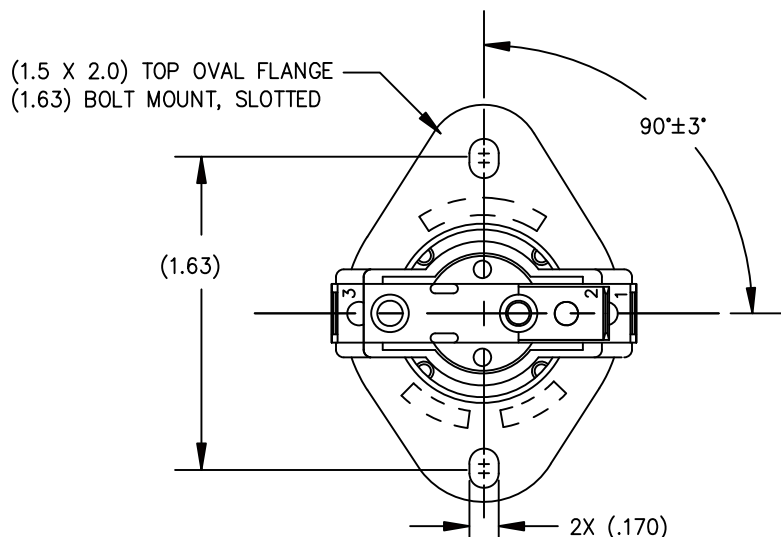

NOTE:
PART TO BE CODED WITH:
SENSATA P/N
TEMP. CODE
DATE CODE

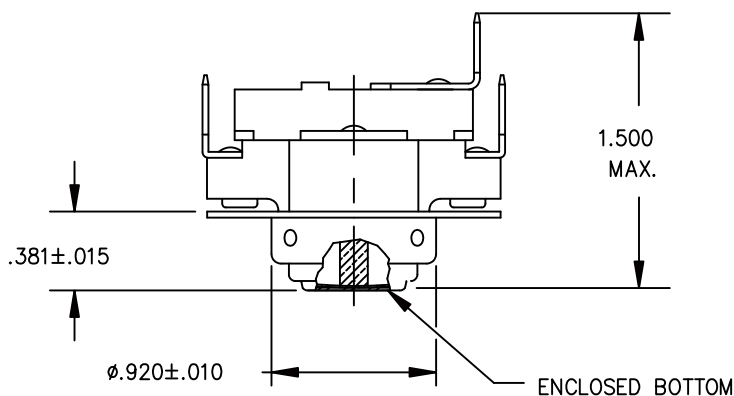

Klixon
®
CONTROL PRODUCTS
DIVISION

FOR REFERENCE ONLY, CHECK LATEST REVISION BEFORE USE.
PARTS MADE TO THIS PRINT MUST CONFORM TO E9898 REV. E

DRAWN
G.LAPATI
DATE 05-MAR-2010

ENGINEER
A.AMORE
DATE 05-MAR-2010

APPROVED
K.SULLIVAN
DATE 05-MAR-2010

APPROVED
B.DAGUE
DATE 05-MAR-2010


SENSATA TECHNOLOGIES PROPRIETARY AND
CONFIDENTIAL. NEITHER THIS PRINT NOR THE
INFORMATION CONTAINED HEREON IS TO BE USED
AGAINST THE INTERESTS OF SENSATA TECHNOLOGIES
OR AGAINST THE INTERESTS OF ANY OF ITS AFFILIATED
COMPANIES OR WHOLLY OWNED SUBSIDIARIES.

INTERPRET DIMENSIONING AND TOLERANCING
PER ASME Y14.5-2009. UNLESS OTHERWISE
SPECIFIED DIMENSIONS ARE IN INCHES.

TOLERANCES DECIMALS ANGLES

DO NOT
SCALE
DRAWING

THIRD ANGLE
PROJECTION



529 PLEASANT STREET
P.O. BOX 2964
ATTLEBORO, MA 02703

TITLE

3/4" S.P.D.T.
AUTO RESET
THERMOSTAT

SIZE

DWG NO.

REV.

A

20600D123-330

A

SCALE

NA

AUTOCAD

SHEET 1 OF 1