



**2" x 4" x 1.24"**

## General Specifications:

Input voltage ..... 90VAC to 264VAC  
 Input frequency..... 47Hz to 63Hz  
 Inrush current ..... < 30A at 115VAC  
 (cold start at 25°C) or < 60A at 230VAC  
 Efficiency ..... 75%~90% depends on models  
 at rated load and 115VAC  
 Hold up time ..... 16ms typical  
 at rated load and 115VAC  
 Over load protection ..... auto recovery  
 Short circuit protection ..... auto recovery

## Features:


- Only 1.24 inch height
- 6.0 Watt per cubic inch
- With ITE safety
- Efficiency between 75% to 90%
- Operation from 0°C to 70°C by convection

## Applications:

- For ITE audio equipment, telecommunication, network, IPC, instrument equipment, and other uses.

Over voltage protection ..... latch off  
 Operating temperature ..... 0°C to 70°C convection  
 derating: 2.5% / °C > 50°C  
 Cooling ..... free air convection  
 Storage temperature ..... -40°C to +75°C  
 EMI ..... FCC "B"  
 EN55022"B", EN55011"B"  
 EMS ..... EN61000-4-2,-3,-4,-5,-6,-8,-11  
 Safety ..... UL 60950-1  
 CSA C22.2 No. 60950-1  
 EN 60950-1

## Mechanical Specifications:

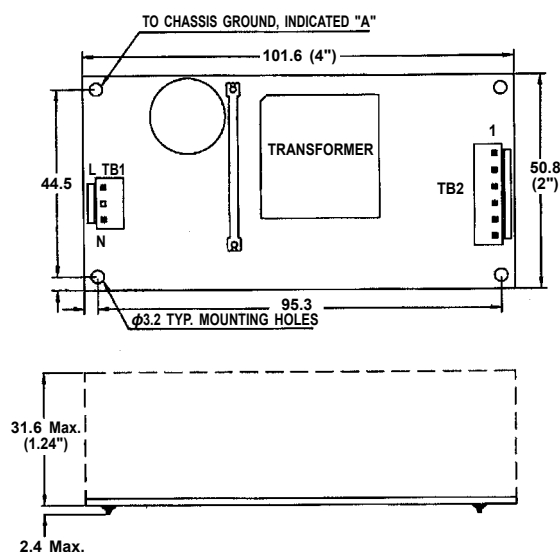

### Notes:

- Size:  
2" x 4" x 1.24"
- Mounting Hole:  
44.5 x 95.3 (mm)
- Connectors:  
AC input : JST B2P3-VH or equivalent  
DC output : JST B6P-VH or equivalent for single output
- Output Pin assignment:

| 1  | 2  | 3  | 4   | 5   | 6   |
|----|----|----|-----|-----|-----|
| Vo | Vo | Vo | GND | GND | GND |

- Packing:  
 Net weight: 136.4 g approx. / unit  
 Gross weight: 13.5 kg approx. / carton, 80 units / carton  
 Carton size (mm): 382 (L) x 374 (W) x 277 (H)

-Clark-

**10 years Warranty (contact Skynet's Distributors for details)**

## Output Specifications:


| MODEL NO. | OUTPUT RAIL | LOAD |       |      |      | VOLTAGE ACCURACY | RIPPLE NOISE | LINE REG. | LOAD REG. |
|-----------|-------------|------|-------|------|------|------------------|--------------|-----------|-----------|
|           |             | MIN. | RATED | MAX. | PEAK |                  |              |           |           |
| SNP-CK66  | +5V         | 0A   | 8A    |      |      | +4.95V~+5.05V    | 50mVpp       | ±1%       | ±3%       |
| SNP-CK67  | +12V        | 0A   | 5A    |      |      | +11.4V~+12.6V    | ±1%          | ±1%       | ±3%       |
| SNP-CK68  | +15V        | 0A   | 4A    |      |      | +14.75V~+15.3V   | ±1%          | ±0.5%     | ±1%       |
| SNP-CK69  | +24V        | 0A   | 2.5A  |      |      | +23.28V~+24.72V  | ±1%          | ±1%       | ±3%       |
| SNP-CK6T  | +48V        | 0A   | 1.25A |      |      | +46.56V~+49.44V  | ±1%          | ±1%       | ±3%       |
| SNP-CK6B  | +3.3V       | 0A   | 8A    |      |      | +3.26V~+3.34V    | 50mVpp       | ±0.5%     | ±3%       |

### Note:


- At factory, all outputs in 60% rated load condition, each output is checked to be within the accuracy range while the main output is setting to within the specified accuracy range at rated load.
- Line regulation is defined by changing  $\pm 10\%$  of input voltage from nominal line at rated load.
- Load regulation is defined by changing  $\pm 40\%$  of measured output load from 60% rated load at another output set to 60% rated load.
- Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line. For SNP-CK66 and SNP-CK6B, one extra 1 uF electrolytic capacitor should be added.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drop down to regulation limit at rated load and nominal line.
- Model Selection:  
SNP-CK6x is for ITE application.

## Performance for SNP-CK6T:


### 1. Switching frequency ripple

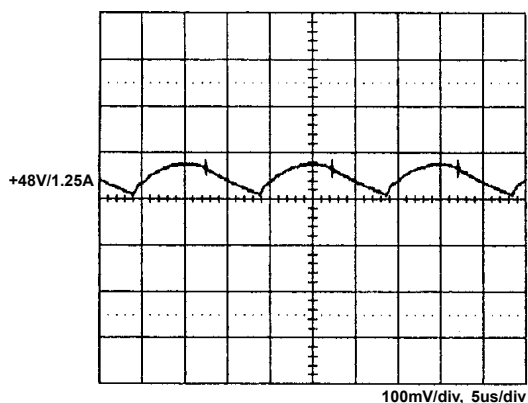


### 2. Line frequency ripple

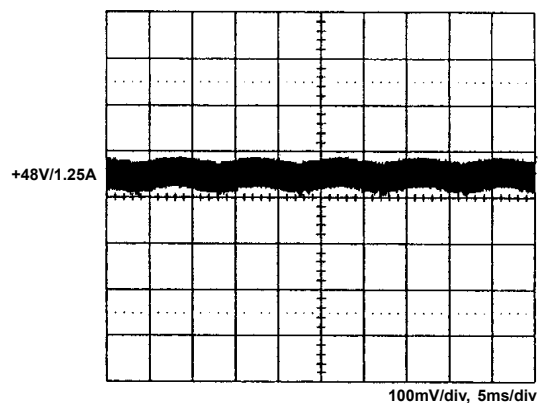


### 3. Output turn on wave form

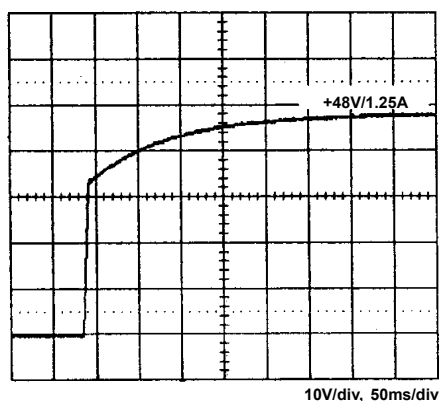


### 4. Output turn off wave form

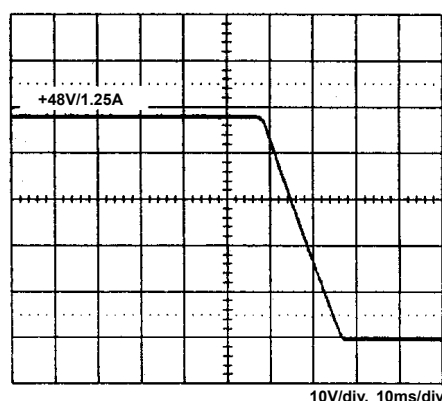


### 5. Hold-up time

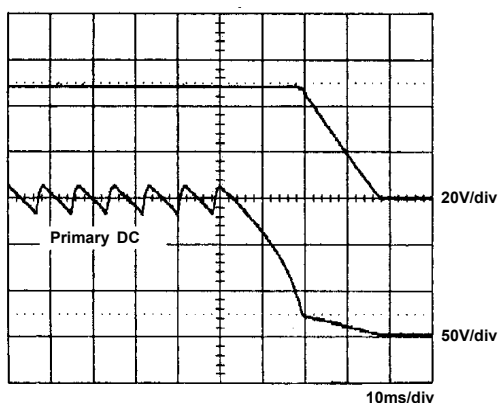


### 6. Over voltage protection

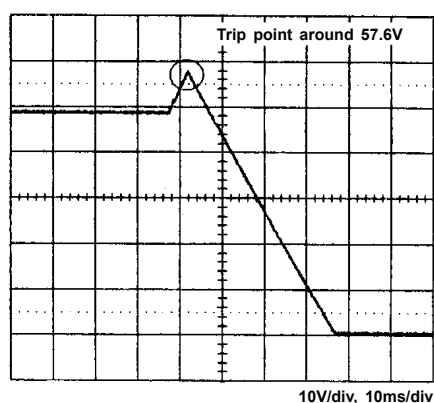


## 7. +48V step response

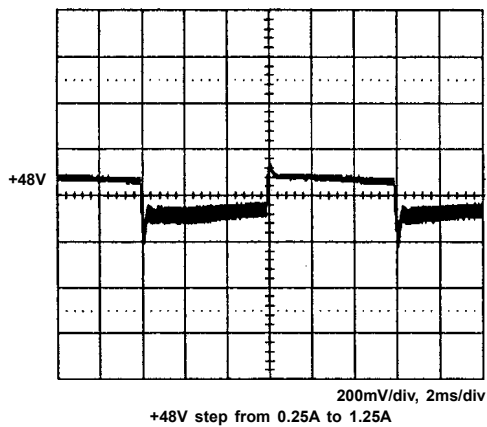

## 8. FCC B

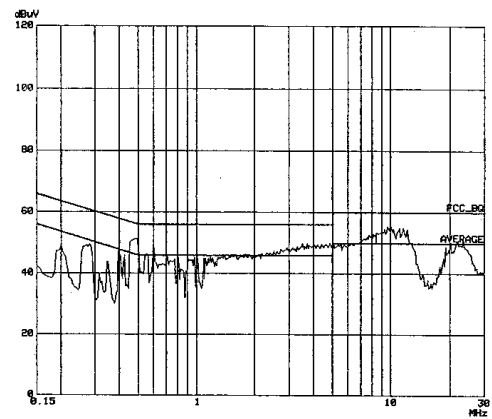

## 9. CISPR B

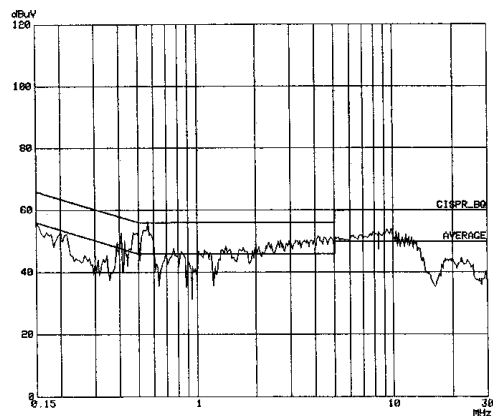

## 10. Power derating curve

