



2" x 3.17" x 0.95"

Features:

- Peak load (1.5 x rated current, V_o =rated for 5 sec)
- Design for BF application
- Convection cooling for Rated power
- No load < 0.3W
- (-A) for no burst sound
- (-H) for home healthcare application
- -40°C to +70°C operating temperature
- 5,000m operation altitude

Applications:


- For peak load applications, such as motor drive, coffee machine, vending machine, gaming machine, and other industrials.
- For input class II and EMI class B application, such as home healthcare device, and other medical devices.

General Specifications:

Input voltage 90 VAC to 264 VAC
Input frequency 47 Hz to 63 Hz
Inrush current < 30/60A at 115/230VAC
Hold up time 16ms
Over load/Short circuit protection auto recovery
Over voltage protection latch off
Operating temperature -40°C to 70°C
derating: 2.5% / °C > 50°C
Storage temperature -40°C to +85°C

EMI EN55011 "B", EN61000-3-3
Harmonics..... EN61000-3-2, class A
EMS..... EN61000-4-2,-3,-4,-5,-6,-8,-11
Safety UL/CSA/EN60950-1, 2nd edition
ANSI/AMMI/CSA/EN60601-1, 3.1 edition
CB report, CE mark, RM report/file
Energy Saving ENERGY STAR
for computers version 6.0
for displays version 6.0
ErP regulation EC(No) 1275/2008

Mechanical Specifications:

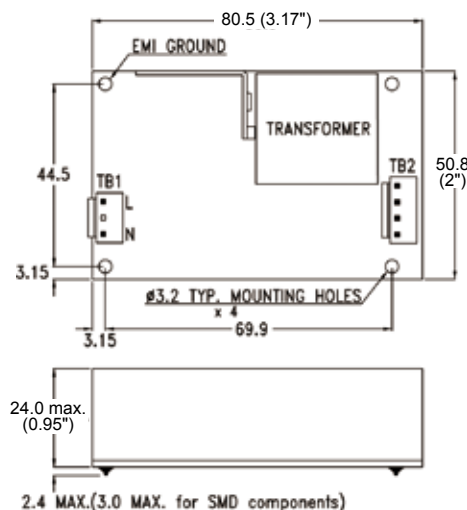

-Jim-

Notes:

1. Size:
2" x 3.17" x 0.95"
2. Mounting Hole:
44.5 x 69.9 (mm)
3. Connectors:
AC input: JST B2P3-VH or equivalent
DC output: JST B4P-VH or equivalent
4. Output Pin assignment:

1	2	3	4
V_o	V_o	GND	GND
5. Packing:
Net weight: 114 g approx. / unit
Gross weight: 14 kg approx. / carton, 100 units / carton
Carton size (mm): 437 (L) x 402 (W) x 240 (H)

10 years Warranty (contact Skynet's Distributors for details)

Output Specifications:


MODEL NO.	OUTPUT RAIL	LOAD				INITIAL ACCURACY	STEP EFFICIENCY			AVERAGE EFFICIENCY
		MIN.	RATED	MAX.	PEAK		@ 20% LOAD	@ 50% LOAD	@ 100% LOAD	
SNP-HF67 SNP-HF67 -A SNP-HF67 -H	+12V	0A	5A	6.67A	7.5A	+11.8V~+12.2V	88% 78%	89% 83%	86% 84%	87% 82%
SNP-HF68 SNP-HF68 -A SNP-HF68 -H	+15V	0A	4A	5.33A	6A	+14.8V~+15.2V	88% 75%	89% 85%	86% 85%	87% 82%
SNP-HF69 SNP-HF69 -A SNP-HF69 -H	+24V	0A	2.5A	3.33A	3.75A	+23.8V~+24.2V	88% 75%	89% 83%	86% 85%	87% 82%
SNP-HF6T SNP-HF6T -A SNP-HF6T -H	+48V	0A	1.25A	1.67A	1.88A	+47.5V~+48.5V	88% 79%	89% 84%	86% 87%	87% 83%

Note:


- Standby Power Consumption with System:**
For computers and displays, ENERGY STAR in U.S. and ErP regulation in Europe require the input power should be less than 0.5W at standby mode.
- Output Load:**
60W for convection cooling; 72W for forced air cooling.
- Peak Load Duration:**
Peak 96W can last for 5 sec.
- Isolation Grade:**
Primary ↔ Ground : 1MOPP (1500Vac)
Primary ↔ Secondary : 2MOPP (4000Vac)
Secondary ↔ Ground : 1MOPP (1500Vac)
- Leakage Current:**
Earth leakage current < 300uA
Touch current < 100uA
- EMI Grounding:**
If there is a metal sheet under the power supply, connect the EMI ground to that metal sheet.
- Model Selection:**
Most of power supplies will create audible burst sound at light load, if the application wants to meet input power < 0.5W at standby mode.
SNP-HF6x is for ITE & Medical applications which require standby mode.
SNP-HF6x-A is for ITE & Medical applications but without burst sound and no standby mode.
SNP-HF6x-H is for Home Healthcare application, input class II and EMI class B.
- The safety application will be proceeded upon request.

Performance for SNP-HF67-A:


1. Switching frequency ripple

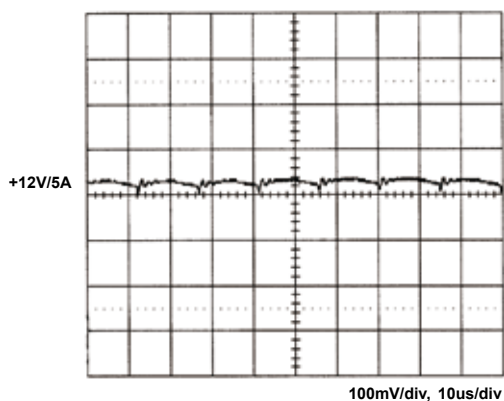


2. Line frequency ripple

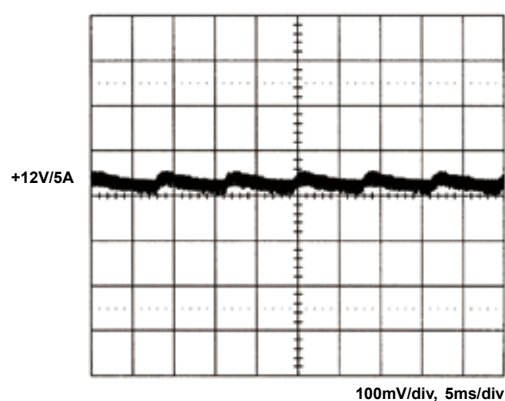


3. Output turn on wave form

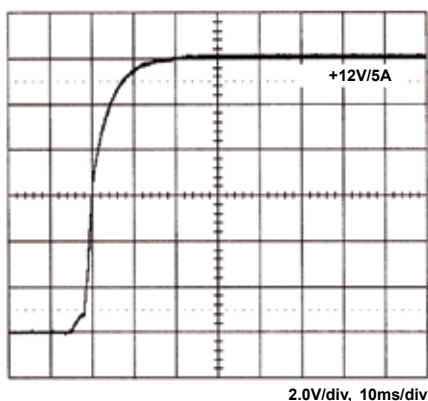


4. Output turn off wave form

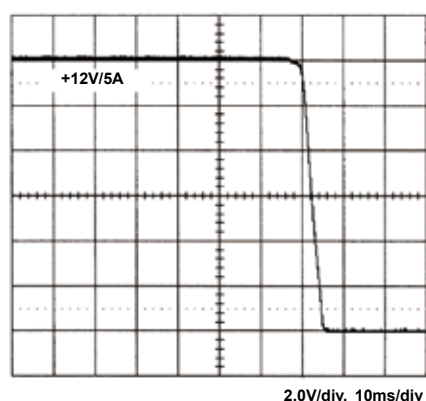


5. Hold-up time

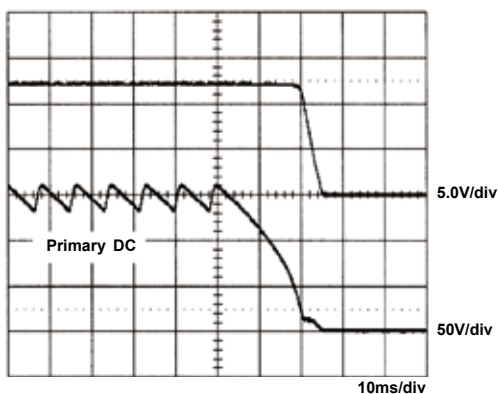


6. Over voltage protection

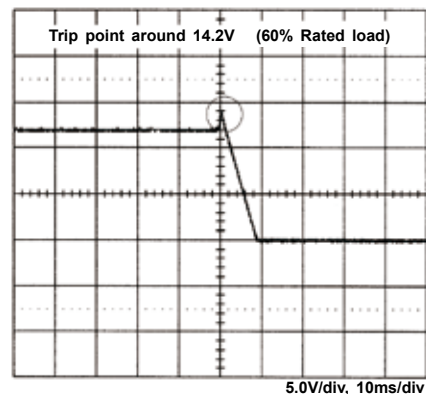


7. FCC B Class I

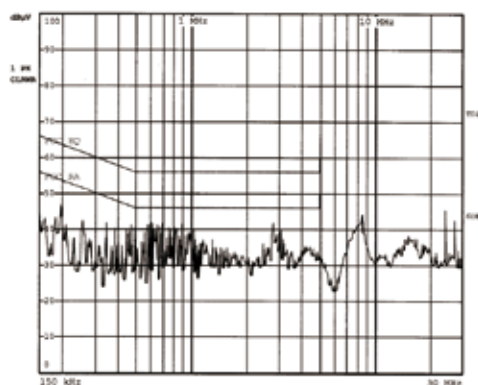


8. EN55011 22 B Class I

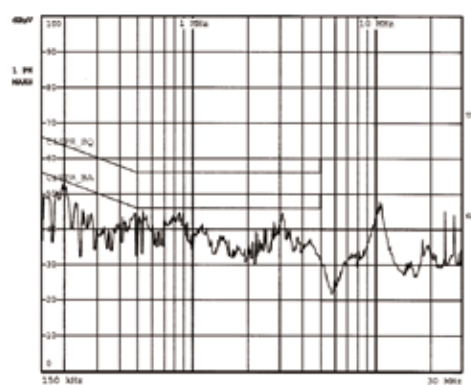


9. FCC B Class II

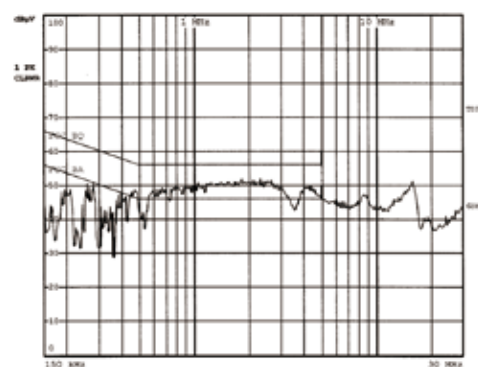

10. EN55011 22 B Class II

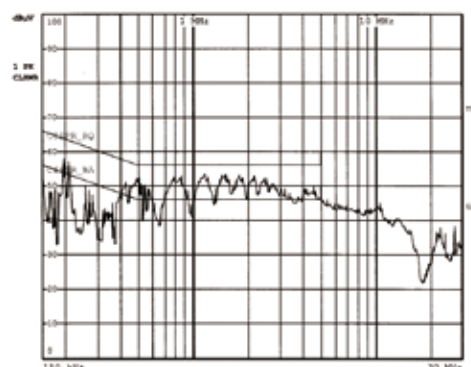

11. Power derating curve

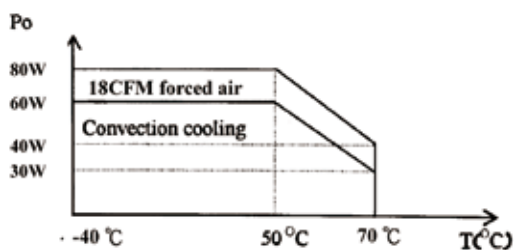

12. Power derating curve

