




## SWITCH MODE TRAVEL CHARGER

PRELIMINARY

### FEATURES

- WIDE RANGE INPUT VOLTAGE
- SINGLE OUTPUT MAX 4W
- DESIGNED FOR ON LINE CHARGING OF MOBILE PHONES
- EMC COMPLIANCE ETS300-342-1
- SAFETY APPROVAL ACCORDING TO EN60950, CSA/UL1950
- OUTPUT CURRENT AND VOLTAGE LEVELS ACCORDING TO CUSTOMER REQUIREMENTS
- OUTPUT VOLTAGE PRECISION  $\pm 5\%$
- OUTPUT CURRENT PRECISION  $\pm 10\%$
- OUTPUT RIPPLE VOLTAGE  $< 100$  mVpp
- INPUT FUSE PROTECTION
- OUTPUT SHORT CIRCUIT PROTECTION
- 2 WIRES DC CORD TERMINATED WITH ANY CUSTOM CONNECTOR
- AVAILABLE WITH A VARIETY OF AC PLUGS: AC PLUG SELECTION INCLUDES EUROPE, UK, US, AUSTRALIA, CHINA
- LOW STAND BY POWER
- CE MARKED. UL, AUSTRALIA, UK, SOUTH AFRICA AND CHINA MARKING UPON REQUEST

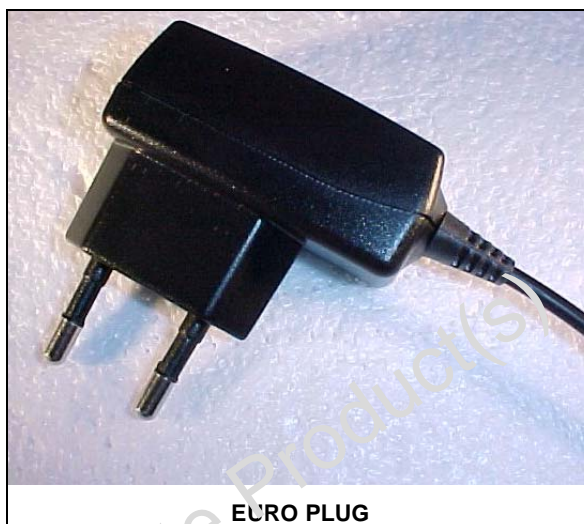

### DESCRIPTION

The Charger has been designed for charging NiMH, NiCd and Li-Ion batteries in GPRS hand held mobile phones.

It is a very low cost high efficiency AC/DC switching mode constant voltage & current generator.

The output voltage and current levels are set up by design in accordance with customer requirements.

Typical reference values in this data sheet are 5V, 700 mA with the input ranging (90÷264 V<sub>rms</sub>).

Coming into its light housing, the charger can be assembled with a variety of AC plugs identified by specific ordering numbers.

Interface to the phone is ensured via a 2 wires cord with strain relief, terminated with customer specified connector.

Typical weight is 25 grams only, without cable.

Plug Type	Generic Part Number
EURO	GSACM-STM/1
UK	GSACM-STM/2
USA	GSACM-STM/3
AUSTRALIA	GSACM-STM/4
CHINA	GSACM-STM/5

## GSACM-MINI

### ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^{\circ}\text{C}$ , unless otherwise specified.) GSACM-STM

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_i$	Input Voltage		90		264	$V_{rms}$
$V_o$	Output Voltage limit	$0 < I_o < 700 \text{ mA}$	4.75	5.0	5.25	V
$I_o$	Output Current limit	$V_o = V_o \text{ nom.}$	700		850	mA
$V_{or}$	Output Ripple	$I_o=700 \text{ mA}$			100	mVpp
$W_{io}$	Input Power	no load condition			0.3	W
$V_{is}$	Isolation Voltage	Input to Output, $t=60\text{s}$ (EN60950)	3000			$V_{rms}$
$T_{op}$	Operating Ambient Temperature		-5		55	$^{\circ}\text{C}$
$T_{stg}$	Storage Temperature Range		-40		70	$^{\circ}\text{C}$
n	efficiency			75%		


### AGENCY APPROVALS

The charger is certified by competent agencies to comply with most popular safety and EMC requirements, including:

EN60950

ETS300-342-1

It is marked CE, other marking including UL, AUSTRALIA, UK, SOUTH AFRICA and CHINA are available upon request and agreement.

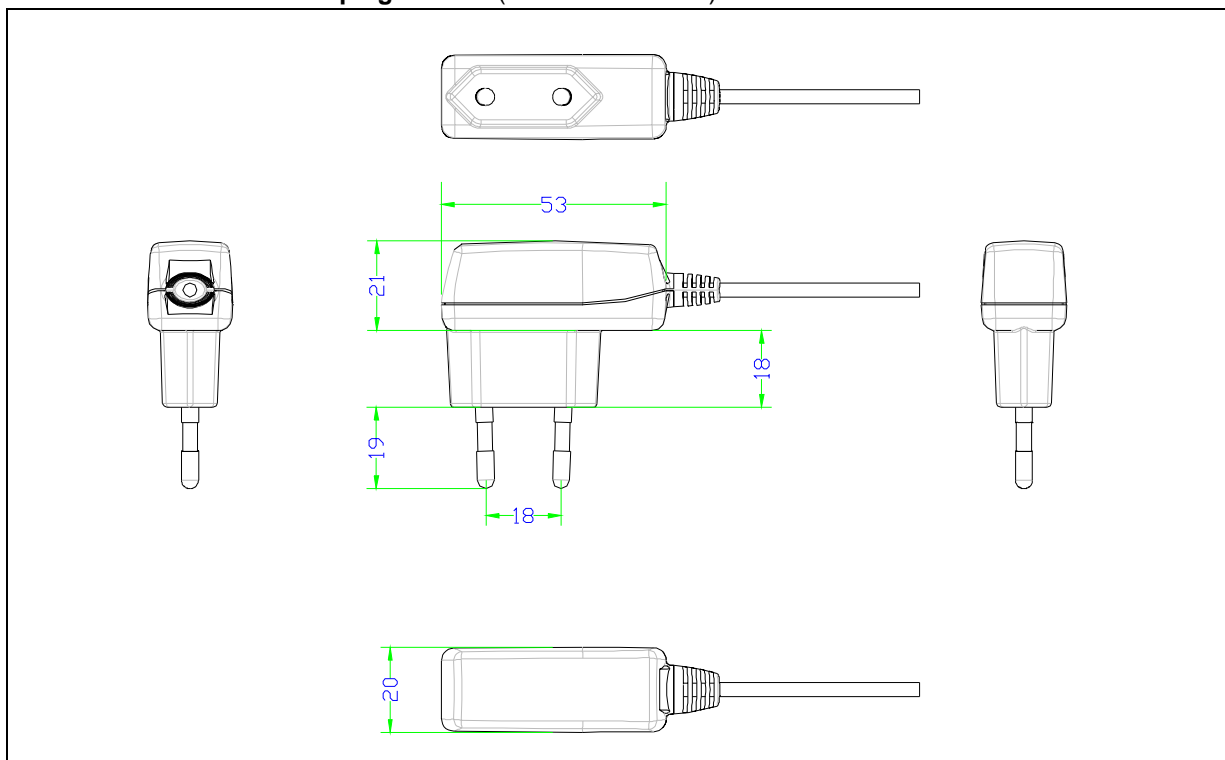**MECHANICAL DATA EURO plug version (dimensions in mm)**

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved

**STMicroelectronics GROUP OF COMPANIES**

Australia - Belgium - Brazil - Canada - China -Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.  
<http://www.st.com>