



COMPUTER TECHNOLOGY CO., LTD

For Approval

Page: 1-9
Date: 2008/03/04
Rev: V1.0

Product: POWER SUPPLY
Customer: JAMECO
MODEL No: SYS1308-2412-W2(RoHS)
Customer P/N: 1950497
B.P/N:

Check By: Cynthia Mar. 4th 2008

Customer SIGN/APPROVAL	Comments:
3/04/08 <i>Manny Morder</i>	
Date:	

SUNNY COMPUTER TECHNOLOGY CO., LTD BENGLI XIN-CHENG INDUSTRIAL ZONE DONGGUAN CITY, GUANGDONG PROVINCE, 523476 CHINA TEL: 86-769-8337-7756-4 FAX: 86-769-8337-7351-2 E-MAIL: sales@sunny-group.com http://www.sunny-group.com	PROPERTY OF SUNNY COMPUTER TECHNOLOGY CO., LTD DO NOT USE OR DUPLICATE WITHOUT PERMISSION OF THE OWNER
---	---



24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

Item No.		page
0	General	
1	Input Requirements	2
2	Output Requirements	3
3	Protection	5
4	PLD	6
5	COOLING	7
6	EMC	7
7	Leakage Current	7
8	Safety Approval	8
9	Hi-Pot	8
10	Environment	8
11	Vibration	8
12	MTBF	8
13	Mechanical	9
14	DC output connector type and pin assignment	9
15	Label specification	9
16	Package	9

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

General

The specification defines the performance characteristics of a 24 W, Single Output level switching power supply for _____. The power supply has designed highly reliable and meet international safety and radiation requirements.

1.0 Input requirements

1.1 Input voltage range

Type	Low range	High range
Nominal	115Vac	230Vac
Minimum	90Vac	185Vac
Maximum	132Vac	264Vac
Frequency	47-63Hz sine wave 1 ϕ	47-63 Hz sine wave 1 ϕ

☐ Auto range - switch at approximately 150Vac $\pm$ 5Vac

☒ Universal range - 90~264Vac

☐ Range - Selectable by jumper connector or wire.

☐ Range - Selectable by switch.

1.2 Input Current

1.0A rms max	At AC low line input and DC output full load
--------------	--

1.3 Input protection

1A Fuse	The power supply shall be protected against power line surges and any abnormal condition.
---------	---

1.4 Input surge current

40A/60A max	At power supply cold start, ambient temperature 25°C @115Vac /230Vac nominal AC input.
-------------	--

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

1.5 Efficiency

70%	Minimum average efficiency in active mode
-----	---

1.6 Hold up time

10ms min	At AC nominal input@ output full load (1 half cycle)
----------	---

1.7 Power consumption

0.5W rms max	At AC nominal input@output min load
--------------	-------------------------------------

2.0 Output requirements

2.1 Turn on delay

7000 ms max	At AC low line input@output full load
-------------	---------------------------------------

* Test on delay is measured from 0 voltage output to the main output regulation.

2.2 DC output regulation

Voltage	Loading(A)			Tolerance Range	Adjustable voltage Range
	Min	Max	Peak	Total Regulation	
+12V	0	2.0A		±5%	none

* Total regulation involved line regulation load regulation cross regulation---etc

* Line regulation is measured from 90Vac to 132Vac or 185vac to 264vac

* Load regulation is measured all output from min load to max load at 115vac
or 230vac nominal AC input voltage.

PROPERTY OF SUNNY COMPUTER TECHNOLOGY DO NOT BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER	DATE : 06 / 07 / 10 FINAL REV : V1.0 FILE ADDRESS : TCRD2146.DOC.
--	---

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

2.3 Ripple/noise *

Voltage	Low frequency *1	High frequency *2	* 3	* 4
(DC)	Ripple mv(p-p)	Ripple mv(p-p)	Noise mv(p-p)	Ripple/Noise(p-p)
+12V	——	——	——	120mV

* The ripple is measured from peak to peak with band width limit of 20MHZ

(By passed at the end of connector with 10uf electrolytic and 0.1uf ceramic disk capacitor under DC output full Load, AC nominal input 25°C ambient temperature).

* 1.2.3.4 Unless has special requirements otherwise * 4 is the testing spec.

2.4 Output transient response (dv , tmax)

0.3v dv max	At AC nominal input loading from 50% load to max load or peak load.
16ms t max	Dynamic rise time 10uS max , duty 40mS max , Dynamic load step is slew rate of 0.5A/uS

* Test only for main output or designed by customer.

2.5 Power output limit : Peak 27 W

2.6 Burn in test : Will be defined after meeting.

2.7 Led display : none

PROPERTY OF SUNNY COMPUTER TECHNOLOGY DO NOT BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER	DATE : 06 / 07 / 10 FINAL REV : V1.0 FILE ADDRESS : TCRD2146.DOC.
--	---

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

3.0 Protection

3.1 Short protection / Over current protection

The power supply will self-protect any output to ground, And auto recovery when abnormal circuit faults remove.

An output short circuit is defined as any output impedance of less than 0.1 ohms.

Voltage	OCP Current(A)	Power in(W)	OCP method		
			latch off	Current limit	Fold back
+12V	3.0~8.0A		☐	☐	☒
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐

3.2 Over voltage protection

Voltage	OVP range	OVP Method		
		Latch off	Auto recovery	Voltage limit
+12V	14~18V	☐	☐	☒
		☐	☐	☐
		☐	☐	☐
		☐	☐	☐
		☐	☐	☐

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

3.3 No load protection

The power supply is provided with noload operation to prevent the power supply and system from damage.

3.4 Temperature coefficient: Less than $\pm 0.5\%$ / $^{\circ}\text{C}$

4.0 PLD (power line disturbance)

4.1 LINE POWER SURGE

The power supply shall meet its specification with a rise in AC voltage to 120% of maximum rated line voltage (288 voltage for 100-240 Vac operation)for a maximum of 20 milliseconds at 50Hz and 16 millisecond at 60Hz.The surge is to be applied five times with an internal of one minute between surges.

4.2 LINE VOLTAGE SAG

The power supply shall continue to meet its specifications with a line voltage drop (and subsequent return to minimum rated voltage)to 68 Vac with a total power sag cycle time of 20 ms (rise and fall time shell equal 10 ms each).

5.0 COOLING

Cooling Method	
By ____ mm fan force air cooling	☐
By natural air.	☒

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

6.0 EMC

Meet EN55022 class B, Fcc part 15 Sub part B class B.

6.1 CE spec.

- ☒ EN55022 Limits and methods of measurement of radio disturbance characteristics of information technology equipment.
- ☒ EN61000-3-2 By household appliances and similar electrical equipment “Harmonics”.
- ☒ EN61000-3-3 By household appliances and similar electrical equipment “Voltage fluctuations”.
- ☒ EN55024(1998)+A1(2001) By EMS TEST:
- ☒ ESD Measurement(EN61000-4-2).
- ☒ RF Field strength Susceptibility Measurement(EN61000-4-3).
- ☒ Electrical Fast Transient/Burst Measurement(EN61000-4-4).
- ☒ Surge Immunity Test(EN61000-4-5).
- ☒ Conducted Disturbances Induced By Radio-Frequency Field Immunity Test (CS) (EN61000-4-6).
- ☒ Power Frequency Magnetic Field Immunity Tests (EN61000-4-8).
- ☒ Voltage Dips, Short interruptions and Voltage Variation immunity tests (EN61000-4-11).

7.0 Leakage current : 0.25 mA max.

8.0 Safety approval

A : CUL D : PSE G : _____
B : CB E : FCC H : _____
C : BSMI F : _____ I : _____

9.0 HI-POT

- ☐ HI-POT---A IEC 320 3pin primary to secondary (FG) 1500Vac 10mA 1min
- ☒ HI-POT---B IEC 320 2pin primary to secondary 3000Vac 10mA 1min

24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2

Part No: SYS1308-2412

10. Environment

TEMPERATURE AND HUMIDITY

OPERATING TEMPERATURE 0 DEGREES C TO 40 DEGREES C.

OPERATING HUMIDITY 8% TO 90%RH.(RELATIVEHUMIDITY).

STORAGE TEMPERATURE -20 DEGREES C TO 85 DEGREES C.

STORAGE HUMIDITY 5% TO 95%RH.(RELATIVEHUMIDITY).

11. Vibration

SWEEP AND RESONANCE SEARCH

FREQUENCY	DURATION	AXIS	AMPLITUDE
5-20-500	30 MINUTES	X,Y,Z	1G

12. M.T.B.F

Shall be 35000 power on hours on greater under 25 degrees C of ambient temperature
MTBF under evaluated under.

* M.T.B.F. 35000 hours will be affected if the product won't be used for a long time.

13. Mechanical

13.1 Dimension unit : (mm)(max)

$$L \times W \times H = (75 \pm 0.5) \times (34 \pm 0.5) \times (43 \pm 0.5)$$

13.2 Weight (g) : 128g

13.3 Drawing : As Attachment()

PROPERTY OF SUNNY COMPUTER TECHNOLOGY DO NOT BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER	DATE : 06 / 07 / 10 FINAL REV : V1.0 FILE ADDRESS : TCRD2146.DOC.
--	---



24 W POWER SUPPLY

Engineering specification

Model : SYS1308-2412-W2



Part No: SYS1308-2412

14. DC output connector type and pin assignment : As Attachment()

15. Label specification : As Attachment()

16. Package : As Attachment()

APPEARANCE SIZE: 75x34x43

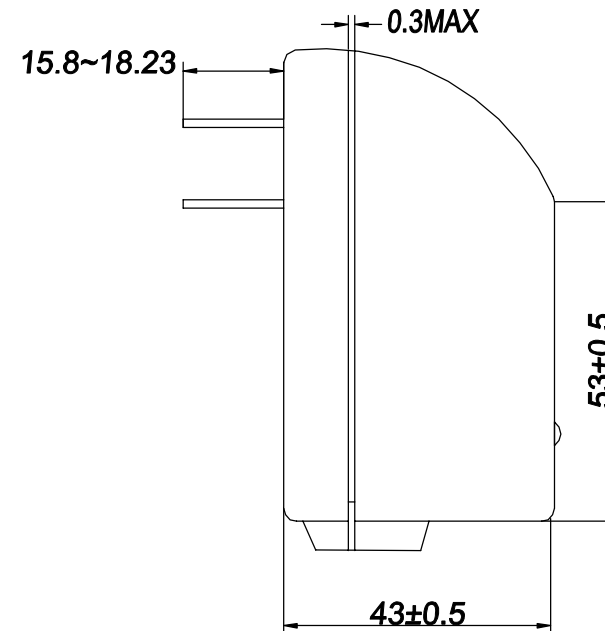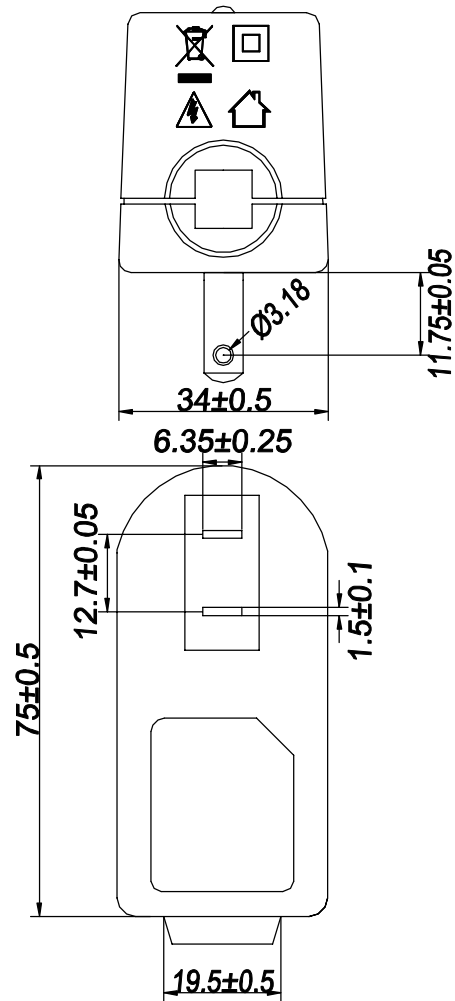


TEL: (0769) 83377756-9 83377358

FAX: (0769) 83377351-2

Email: sales@sunny-group.com


MODEL NAME	SYS1308-W2				APPROVAL2		ISSUED STAMP			
PART NO.		UNIT	mm		APPROVAL1					
DRAWING NAME	APPEARANCE	TOLERANCES UNLESS OTHERWISE SPECIFIED			ENGINEER					
PART NAME		0.5-6	±0.1		DRAWING BY	YAN JUN MEI 11/15				
DWG PATH:		6-30	±0.2		DOC.NO.		SCALE	6:5	SHEET	1 of 1
		30-120	±0.3							
		120-315	±0.4							

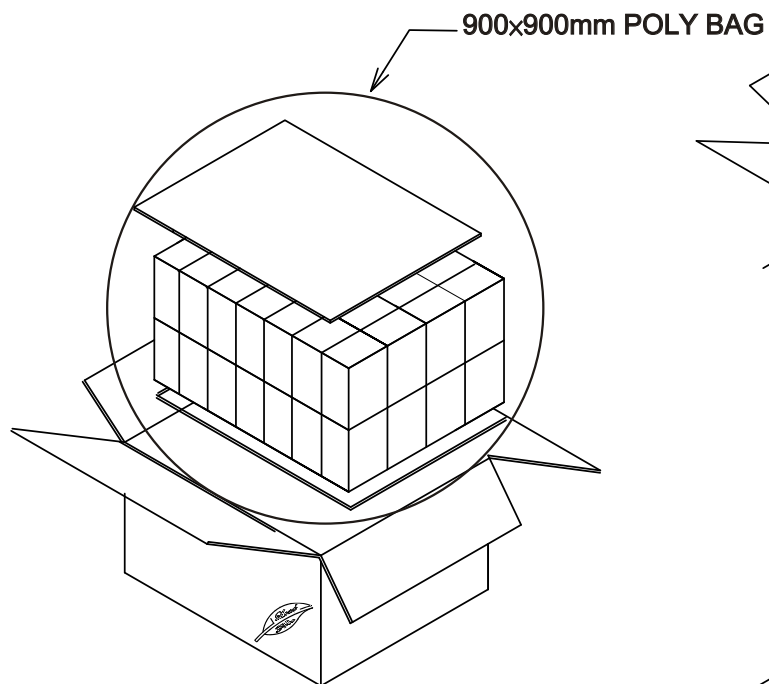


OUTER CARTON : 475(L)*425(W)*245(H)

INNER CARTON : 455(L)*405(W)*220(H)


Q'TY: 7(L)*4(W)*2(H)=56PCS

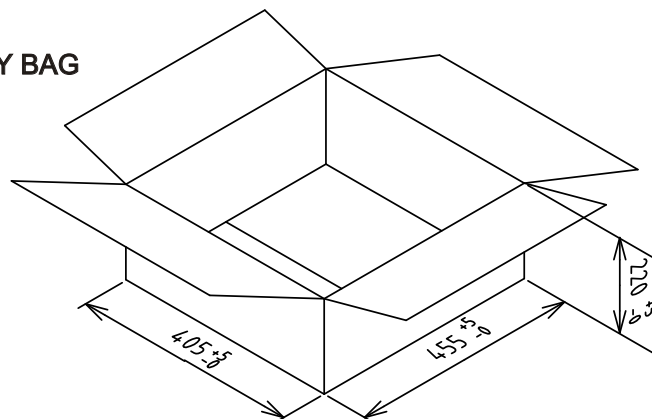


INNER CARTON

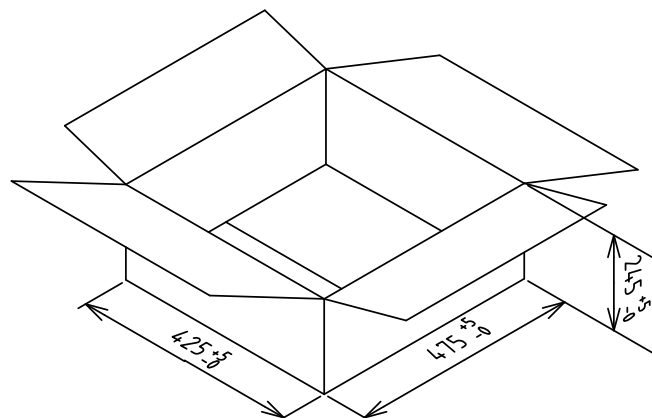

OUTER CARTON

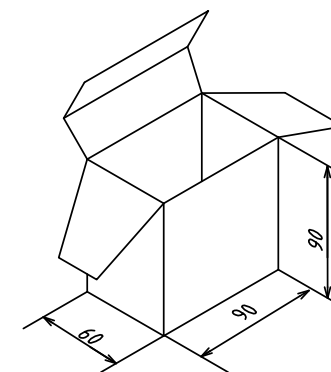

GIFT BOX

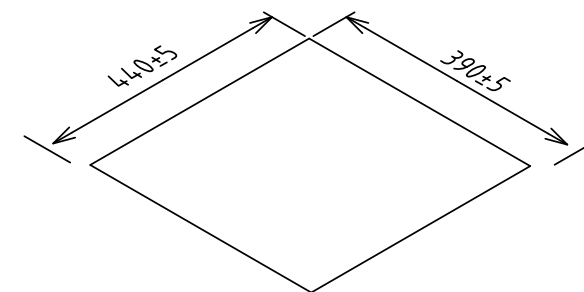

PARTITION

5	G11720028A0** A=A	1PC	OUTER CARTON
4	G11720030A0**A=A	1PC	INNER CARTON
3	G11740023A0**A=A	2PCS	PARTITION
2	G11710109A0**	56PCS	GIFT BOX
1	G1175089*****	1PC	POLY BAG
NO	SPECIFICATION	Q'TY	56PCS

Sunny

TEL: (0769) 83377756-9 83377358

FAX: (0769) 83377351~2

Email: Sales@Sunny-group.com

MODEL NAME SYS1308 RoHS

PART NO

DRAWING NAME PACKING

PART NAME

DWG PATH:

UNIT	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED	
LINEAR	0.0 +/- 0.1
	0.00 +/- 0.01
	0.000 +/- 0.005
ANGLE	+/- 2 degree

APPROVAL 2

APPROVAL 1

ENGINEER

DRAWING BY Wanlingling 2007/11/10

DOC.NO.


ISSUED STAMP

SCALE SHEET 1 OF 1

REV	DESCRIPTION	DATE
A1	最新版本	08/03/04



SCALE:1.0X

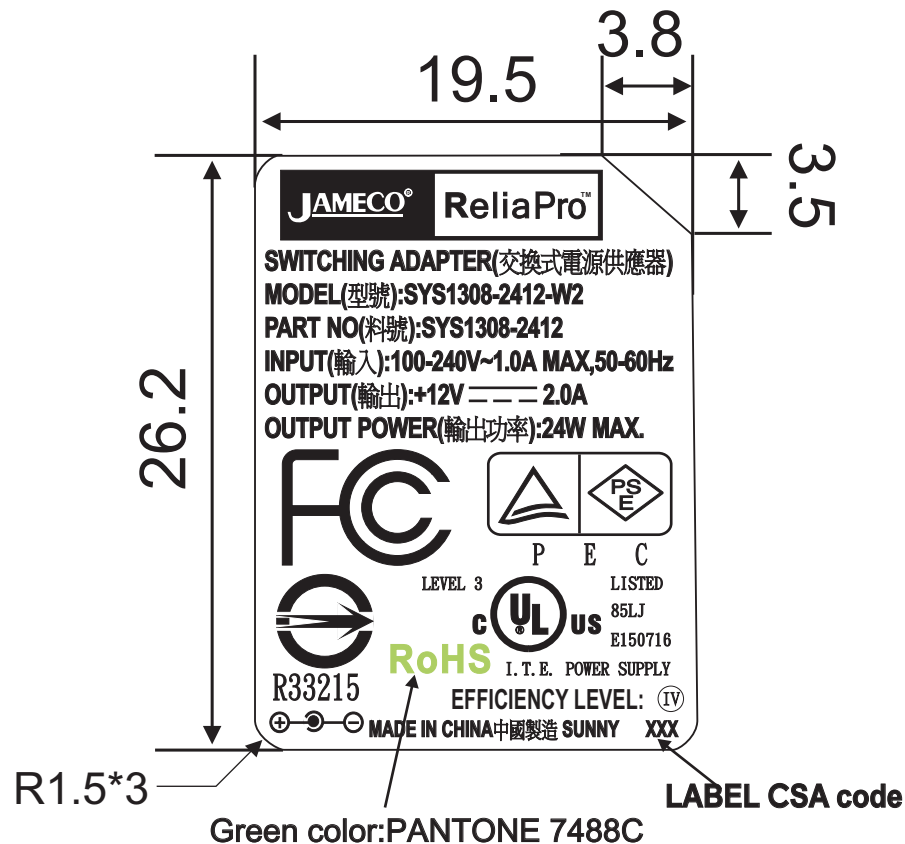

SCALE:3.0X

NOTE:

1>.Black Polyester sheet with white nomenclature

2>.Material: PVC

3>.Thickness : 180#

4>.Tolerance: 0.1mm



TEL : (0769)83377756-9 83377358

FAX:(0769)83377351-2

Email:sales@sunny-group.com

MODEL NAME	SYS1308-2412-W2			APPROVAL2		ISSUED STAMP			
PART NUMBER	G1151048739A1	UNIT	mm	APPROVAL1	Cynthia 03/04				
DRAWING NAME	LABEL	TOLERANCES UNLESS OTHERWISE SPECIFIED		ENGINEER					
PART NAME	SYS1308-2412	LINEAR	0.0 ± 0.1 0.00 ± 0.01	DRAWING BY	LU SUN 3/4				
DWG PATH:D:\COREL\LABEL		ANGLE	0.000 ± 0.001 ANGLE ± 2°	DOC.NO.		SCALE	1:1	SHEET	1 Of 1

