


SuperChassis 812L-350 / 812L-350B

[Products](#) ▶ [Chassis](#) ▶ [1U](#) ▶ [[SC812L-350](#) / [SC812L-350B](#)]

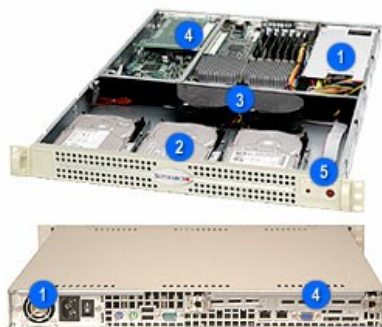

Key Features

1. 350W Power Supply
2. 3x 3.5" Internal Drive Bays
3. 2x 10cm PWM Blower Fans
4. 1x Full-size, Full-length and 1x Low-profile I/O Expansion Slot
5. Power Switch & 5 LED Indicators

Available Colors

Beige

Black

Downloads

Chassis Manual

Note: Image above may show a varied configuration or optional parts. Please refer to parts list for standard parts included.

Specifications

Product SKUs - Discontinued SKU. Please contact sales-rep for possible OEM production quantities. MOQ may apply

CSE-812L-350 ■ SuperChassis 812L-350 (**Beige**)

CSE-812L-350B ■ SuperChassis 812L-350B (**Black**)

Form Factor

- 1U chassis support for max. motherboard size - 12" x 13" E-ATX
- Compatible with **X7DXR-xxx** & **X6DXR-xxx** motherboards ONLY

Processor Support

Supports dual Intel® / AMD processors

Dimensions

Height	1.7" (43mm)
Width	16.8" (426mm)
Depth	25.6" (650mm)
Gross Weight	33 lbs (15.0kg)
Available Colors	Beige, Black

Expansion Slots

- 1x full-size full-length PCI expansion slot (Riser Card Required)
- 1x Low-profile PCI expansion slot (Riser Card Required)

Drive Bays

Internal Bay	3x 3.5" Internal Drive Bays SAS or enterprise SATA HDD only recommended
---------------------	--

Front Panel

Buttons	<ul style="list-style-type: none"> • Power On/Off button • System Reset button
LEDs	<ul style="list-style-type: none"> • Power LED • Hard drive activity LED • 2x Network activity LEDs • System Overheat LED

System Cooling

Fans	2x 10cm PWM blower fans
-------------	-------------------------

Operating Environment (System)

Operating Temperature Range	■ 5°C ~ 35°C (41°F ~ 95°F)
Non-Operating Temperature Range	■ -40°C ~ 60°C (-40°F ~ 140°F)
Operating Relative Humidity Range	■ 8% ~ 90% (non-condensing)
Non-Operating Relative Humidity Range	■ 5% - 95% (non-condensing)

Power Supply

350W AC power supply with PFC	
AC Voltage	• 100 - 240V, 60-50Hz, 6 Amp
DC Output	• 5V + 3.3V ≤ 157W
+5V	25.0 amp
+5V standby	2.0 amp
+12V	25.0amp
-12V	0.8 amp
+3.3V	20.0 amp

Regulatory (Power Supply)

Power Supply Safety / EMC	<ul style="list-style-type: none"> • USA - UL listed, FCC • Canada - CUL listed • Germany - TUV Certified • Europe/CE Mark • EN 60950/IEC 60950-Compliant
----------------------------------	--

Components

Standard Parts List

	Part Number	Qty	Description
Chassis	CSE-812L-350	1	1U Chassis (Beige)
	CSE-812L-350B	1	1U Chassis (Black)
Power Supply	PWS-0042-20	1	FSP350-601U 350W 20-Pin 1U power supply
Fan(s)	FAN-0038L4	2	1U, 10cm 4-pin 4200rpm PWM blower fan
Mounting Rails	CSE-PT34	1	1U Chassis Mounting Rails and Kit; 28.0" - 37.3"

Optional Parts List

	Part Number	Qty	Description
Heatsink / Retention	-	-	Please refer to our Thermal Components Matrix

Information in this document is subject to change without notice.

Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.